

DATASHEET

Variable Speed Drives



Main Features

Reference : NACFW110044T6ON1NBZ
 Product code : 11993167
 Product line : CFW11

Basic data

Power supply : 500-690V
 Input minimum-maximum voltage : 425-759 V
 Number of phases : 3
 Input : 3
 Output : 3

Supply voltage range	500-600V		600-690V	
	Normal (ND)	Heavy (HD)	Normal (ND)	Heavy (HD)
Overload regime				
Rated current	44 A	36 A	35A	30A
Overload current at 60 s	48,4A	54A	38,5A	45A
Overload current at 3 s	66A	72A	52,5A	60A

Maximum applicable motor

Voltage/Frequency	Power (HP / kW) [1]	
	Normal Overload (ND)	Heavy Overload (HD)
525V / 50Hz	40 / 30	30 / 22
575V / 60Hz	40 / 30	30 / 22
690V / 50Hz	50 / 37	40 / 30
690V / 60Hz	50 / 37	40 / 30

Dynamic braking [2] : Optional without braking
 Electronic supply : Internal
 Safety Stop : No
 RFI internal filter [3] : With filter (C3 category)
 External filter : Not available
 Link Inductor : Yes
 Memory card : Included in the product
 USB port : Standard in the product
 Line frequency : 50/60Hz
 Line frequency range (minimum - maximum) : 48-62 Hz
 Phase unbalance : Less or equal to 3% of input rated line voltage
 Transient voltage and overvoltage : Category III
 Rated current of single-phase input :
 - Overload (ND) :
 - Overload (HD) :
 Rated current of three-phase input :
 - Overload (ND) : 44A
 - Overload (HD) : 36A
 Typical input power factor : 0,94
 Displacement factor : 0,98
 Rated efficiency : ≥ 97%
 Maximum connections (power up cycles - on/off) per hour : 60
 DC power supply : Allow
 Standard switching frequency :
 - Overload ND : 5 kHz
 - Overload HD : 5 kHz
 Selectable switching frequency : 1,25; 2,5 and 5 kHz
 Real-time clock : Yes, in the HMI
 Copy Function : Yes, by HMI/MMF
 Dissipated power:

Mounting type	Overload		Overload (*)	
	ND	HD	ND	HD
Surface	918 W	760 W	878 W	760 W
Flange	180 W	156 W	174 W	156 W

Source available to the user

Output voltage : 24 Vcc
 Maximum capacity : 500 mA

Control/performance data

Power supply : Switched-mode power supply
 Control method - induction motor : V/f, VVW, Vector and PM motor
 Encoder interface : Only with 'Slot 2' accessory

DATASHEET

Variable Speed Drives



Control/performance data

Control output frequency [5]	: 0 to 300 Hz
Frequency resolution	: Equivalent to 1 rpm
V/F Control	
- Speed regulation	: 1% of rated speed
- Speed variation	: 1:20
VVW Control	
- Speed regulation	: 1% of rated speed
- Speed variation	: 1:30
Sensorless vector control	
- Speed regulation	: 0,5% of rated speed
- Speed variation	: 1:100
Vector control with encoder	
- Speed regulation	: 0,05% of rated speed
- Speed variation	: Up to 0 rpm

Analog inputs

Quantity (standard)	: 2
Levels	: 0-10V, 0/4-20mA and -10-+10V
Impedance	
- Impedance for voltage input	: 400 kΩ
- Impedance for current input	: 500 Ω
Function	: Programmable
Maximum allowed voltage	: ± 30 Vcc

Digital inputs

Quantity (standard)	: 6
Activation	: Active low and high
Maximum low level	: 3 V
Minimum high level	: 18 V
Input current	: 11 mA
Maximum input current	: 13,5 mA
Function	: Programmable
Maximum allowed voltage	: 30 Vcc

Analog outputs

Quantity (standard)	: 2
Levels	: 0 to 10V, 0 to 20mA and 4 to 20mA
RL for voltage output	: 10 kΩ
RL for current output	: 500 Ω
Function	: Programmable

Digital outputs

Quantity (standard)	: 3 NO/NC relays
Maximum voltage	: 240 Vca
Maximum current	: 1 A
Function	: Programmable

Communication

- Modbus-RTU (with accessory: RS485-01; RS485-05; CAN/RS485-01; RS232-01 or RS232-05)
- Modbus/TCP (with accessory: MODBUSTCP-05)
- Profibus DP (with accessory: PROFDP-05)
- Profibus DPV1 (with accessory: PROFIBUS DP-01)
- Profinet (with accessory: PROFINETIO-05)
- CANopen (with accessory: CAN/RS485-01 or CAN-01)
- DeviceNet (with accessory: DEVICENET-05; CAN/RS485-01 or CAN-01)
- EtherNet/IP (with accessory: ETHERNET/IP-05 or ETHERNETIP-2P-05)
- EtherCAT (with accessory: ETHERCAT-01)
- BACnet (with accessory: RS485-01 or CAN/RS485-01)

Protections available

- Output overcurrent/short circuit
- Power supply phase loss
- Under/Overtoltage in power
- Overtemperature
- Motor overload
- IGBT's modules overload
- Fault/External alarm
- Breaking resistor overload
- CPU or memory failure
- Output phase-ground short circuit

Operation interface (HMI)

Availability	: Included in the product
HMI installation	: Local
Number of HMI buttons	: 9
Display	: Graphic LCD
Indication accuracy	: 5% of rated current
Speed resolution	: 1 rpm

DATASHEET

Variable Speed Drives



Operation interface (HMI)

Standard HMI degree of protection	: IP56
HMI battery type	: CR2032
HMI battery life expectancy	: 10 years
Remote HMI type	: Detachable of the inverter
Remote HMI frame	: Accessory
Remote HMI degree of protection	: IP56

Ambient conditions

Enclosure	: NEMA1/IP20
Pollution degree (EN50178 and UL508C)	: 2
Temperature	
- Minimum	: -10 °C / 14 °F
- Nominal [4]	:
Current reduction factor [5]	:
Relative humidity (non-condensing)	
- Minimum	: 5%
- Maximum	: 90%
Altitude	
- Rated conditions	: 1000 m (3281 ft)
- Maximum allowed for operation (with derating factor)	: 4000 m (13123 ft)
Current Reduction factor[6]	
- Current derating factor (for altitudes above rated)	: 1% for each 100 m above (0,3% for each 100 ft above)
- Voltage derating factor (for altitudes above 2000 m / 6562 ft)	: 1,1% for each 100 m above (0,33% for each 100 ft above)

Sustainability policies

RoHS	: Yes
Conformal Coating	: 3C2 (IEC 60721-3-3:2002)

Dimensions

Size	: D
Height	:
Width	:
Depth	:
Weight	:

Mechanical installation

Mounting position	: Surface or flange
Fixing screw	: M8
Tightening torque	: 20 N.m / 14.76 lb.ft
Allows side-by-side assembly	: No
Minimum spacing around the inverter	
- Top	: 110 mm / 4.33 in
- Bottom	: 130 mm / 5.12 in
- Front	: 20 mm / 0.78 in
- Between inverters (IP20)	: 80 mm / 3.15 in

Electrical connections

Cable gauges and tightening torque:

	Recommended cable gauge to 75 °C (167 °F)	Recommended tightening torque
Power	10,0 mm ² (6 AWG)	1,2 N.m / 0.89 lb.ft
Braking	Not applicable	1,2 N.m / 0.89 lb.ft
Grounding	10,0 mm ² (6 AWG)	3.5 N.m / 2.58 lb.ft
Control	0,5 to 1,5 mm ² (20 to 14 AWG)	0,5 N.m / 0.37 lb.ft

Additional specifications

Maximum breaking current	: Not available
Minimum resistance for the brake resistor	: Not available
Recommended aR fuse [6]	: FNH00-80K-A
Recommended aR fuse [6]	: Not applicable
Recommended circuit breaker [6]	: To define
Recommended circuit breaker [6]	: Not applicable

Standards

Safety	<ul style="list-style-type: none"> - UL 508C - Power conversion equipment. - UL 840 - Insulation coordination including clearances and creepage distances for electrical equipment. - EN 61800-5-1 - Safety requirements electrical, thermal and energy. - EN 50178 - Electronic equipment for use in power installations - EN 60204-1 - Safety of machinery. Electrical equipment of machines. Part 1: General requirements. Note: To have a machine in accordance with this standard, the machine manufacturer is responsible for installing an emergency stop device and supply disconnecting device. - EN 60146 (IEC 146) - Semiconductor converters. - EN 61800-2 - Adjustable speed electrical power drive systems - Part 2: General requirements - Rating specifications for low voltage adjustable frequency AC power drive systems.
--------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

DATASHEET

Variable Speed Drives





Electromagnetic compatibility	<p>EN 61800-3 - Adjustable speed electrical power drive systems - Part 3: EMC product standard including specific test methods.</p> <ul style="list-style-type: none"> - EN 55011 - Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment. - CISPR 11 - Industrial, scientific and medical (ISM) radio-frequency equipment - Eletromagnetic disturbance characteristics - Limits and methods of measurement. - EN 61000-4-2 - Eletromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 2: Eletrostatic discharge immunity test. - EN 61000-4-3 - Eletromagnetic compatibility (EMC) - Part4: Testing and measurement techniques - Section 3: Radiated, radio-frequency, electromagnetic field immunity test. - EN 61000-4-4 - Eletromagnetic compatibility (EMC) - Part4: Testing and measurement techniques - Section 4: Electrical fast transient/burst immunity test. - EN 61000-4-5 - Eletromagnetic compatibility (EMC) - Part4: Testing and measurement techniques - Section 5: Surge immunity test. - EN 61000-4-6 - Eletromagnetic compatibility (EMC) - Part4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio-frequency fields.
Mechanical construction	<ul style="list-style-type: none"> - EN 60529 - Degrees of protection provided by enclosures (IP code). - UL 50 - Enclosures for electrical equipment. - EN 60529 e UL 50

Certifications

Notes

- 1) Orientative motor power, valid for WEG Motors standard of IV poles. The correct sizing must be done according to the nominal current of the motor used, which must be less than or equal to the rated output current of the inverter;
- 2) Braking resistor is not included;
- 3) With category for emission level conducted;
- 4) Without derating and with minimum spaces;
- 5) For temperatures above the nominal and maximum temperature (with derating of current and minimum spaces);
- 6) For altitude over of specified;
- 7) All images are merely illustrative;
- 8) For more information, see the users manual of the CFW-11 (size D).

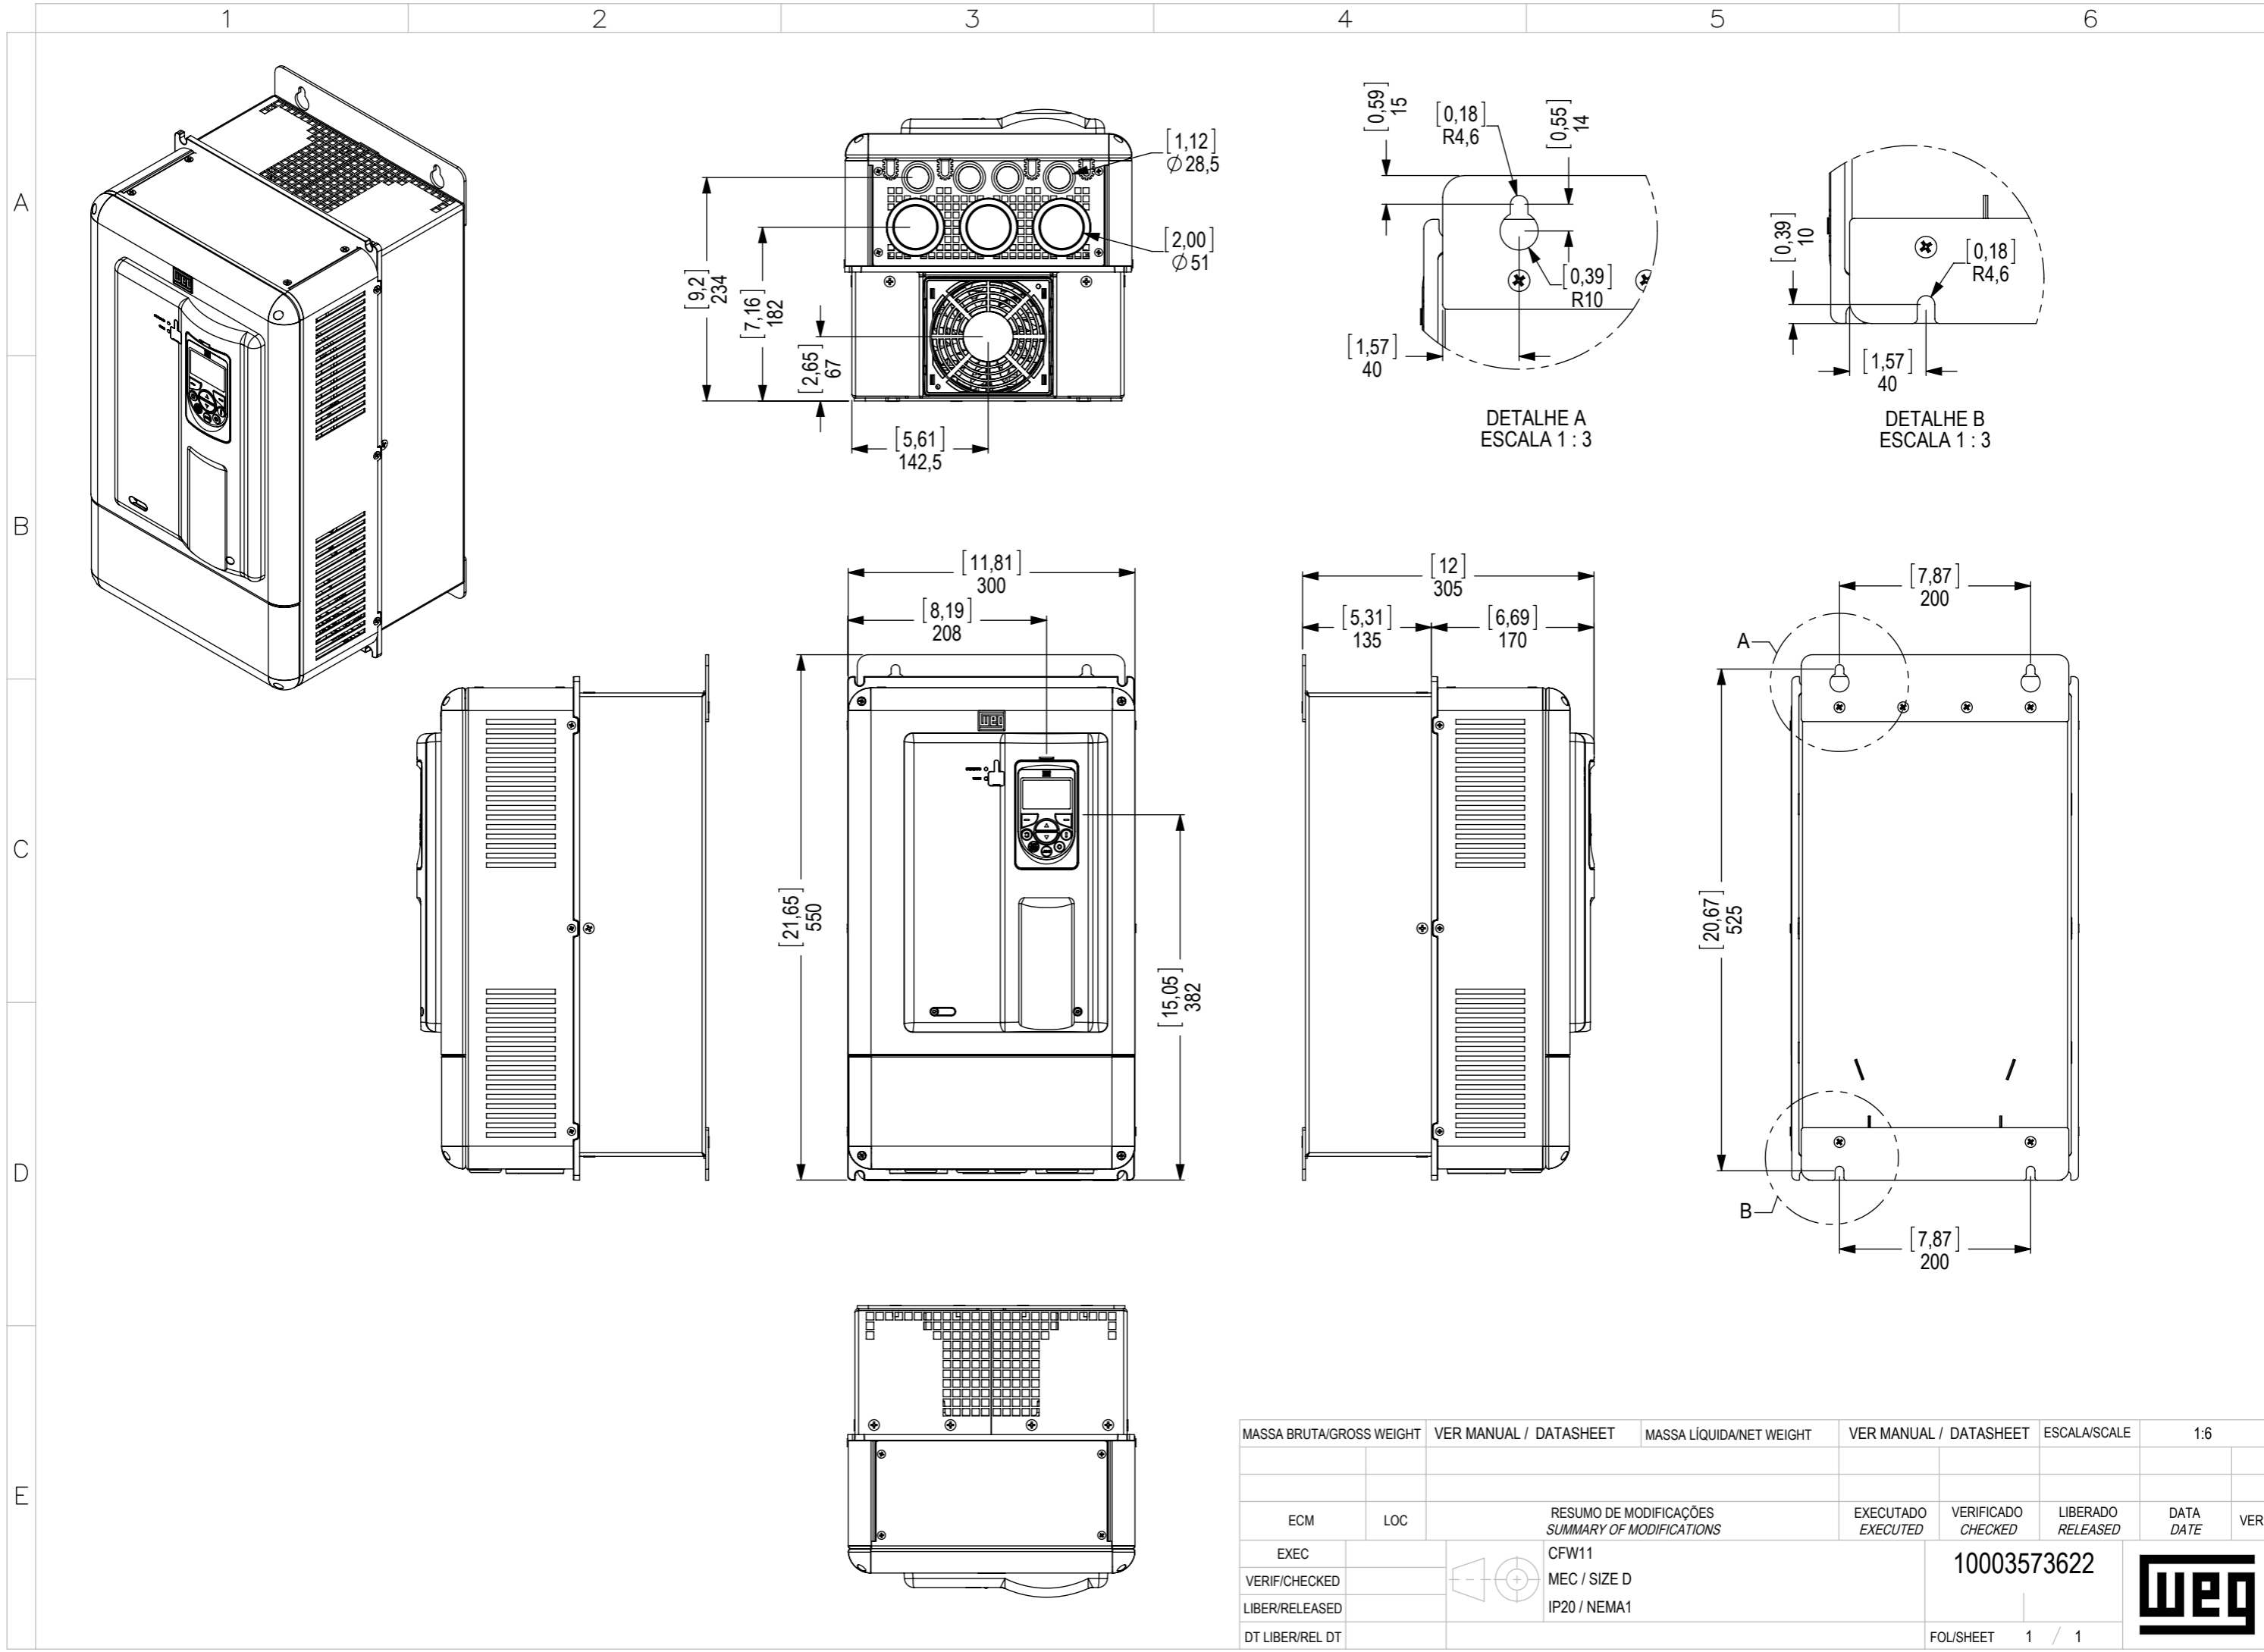

MASSA BRUTA/GROSS WEIGHT		VER MANUAL / DATASHEET		MASSA LÍQUIDA/NET WEIGHT		VER MANUAL / DATASHEET		ESCALA/SCALE		1:6	
EXEC		LOC		RESUMO DE MODIFICAÇÕES SUMMARY OF MODIFICATIONS		EXECUTADO EXECUTED		VERIFICADO CHECKED		LIBERADO RELEASED	
VERIF/CHECKED				CFW11						10003573622	
LIBER/RELEASED				MEC / SIZE D							
DT LIBER/REL DT				IP20 / NEMA1							
										FOL/SHEET 1 / 1	