

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Compressor Duty Single-Phase Product code : 15842173

| | | | |
|-----------------------|---------------------------|-----------------------------|-----------------------|
| Frame | : G56HZ | Locked rotor time | : 10s (cold) 6s (hot) |
| Output | : 5 HP (3.7 kW) | Temperature rise | : 105 K |
| Poles | : 2 | Duty cycle | : Cont.(S1) |
| Frequency | : 60 Hz | Ambient temperature | : -20°C to +40°C |
| Rated voltage | : 208-230 V | Altitude | : 1000 m.a.s.l. |
| Rated current | : 21.0-19.1 A | Protection degree | : IP21 |
| L. R. Amperes | : 137-124 A | Cooling method | : IC01 - ODP |
| LRC | : 6.5x(Code G) | Mounting | : F-1 |
| No load current | : 3.19-3.70 A | Rotation ¹ | : Both (CW and CCW) |
| Rated speed | : 3455 rpm | Starting method | : Direct On Line |
| Slip | : 4.03 % | Approx. weight ³ | : 22.1 kg |
| Rated torque | : 1.05 kgfm | | |
| Locked rotor torque | : 220 % | | |
| Breakdown torque | : 200 % | | |
| Insulation class | : F | | |
| Service factor | : 1.00 | | |
| Moment of inertia (J) | : 0.0030 kgm ² | | |

| | | | | |
|----------------|------|------|------|------------------|
| Output | 50% | 75% | 100% | Foundation loads |
| Efficiency (%) | 83.0 | 85.0 | 85.0 | Max. traction |
| Power Factor | 0.99 | 0.99 | 0.99 | Max. compression |

| | | | |
|----------------------|---|----------------------|----------------------|
| | | <u>Drive end</u> | <u>Non drive end</u> |
| Bearing type | : | 6205 ZZ | 6203 ZZ |
| Sealing | : | Without Bearing Seal | Without Bearing Seal |
| Lubrication interval | : | - | - |
| Lubricant amount | : | - | - |
| Lubricant type | : | Mobil Polyrex EM | |

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|---------------------------|---------|------|
| | | | | |
| Performed by | | Page 1 / 2 Revision | | |
| Checked by | | | | |
| Date | 30/07/2025 | | | |

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Compressor Duty Single-Phase

Product code : 15842173

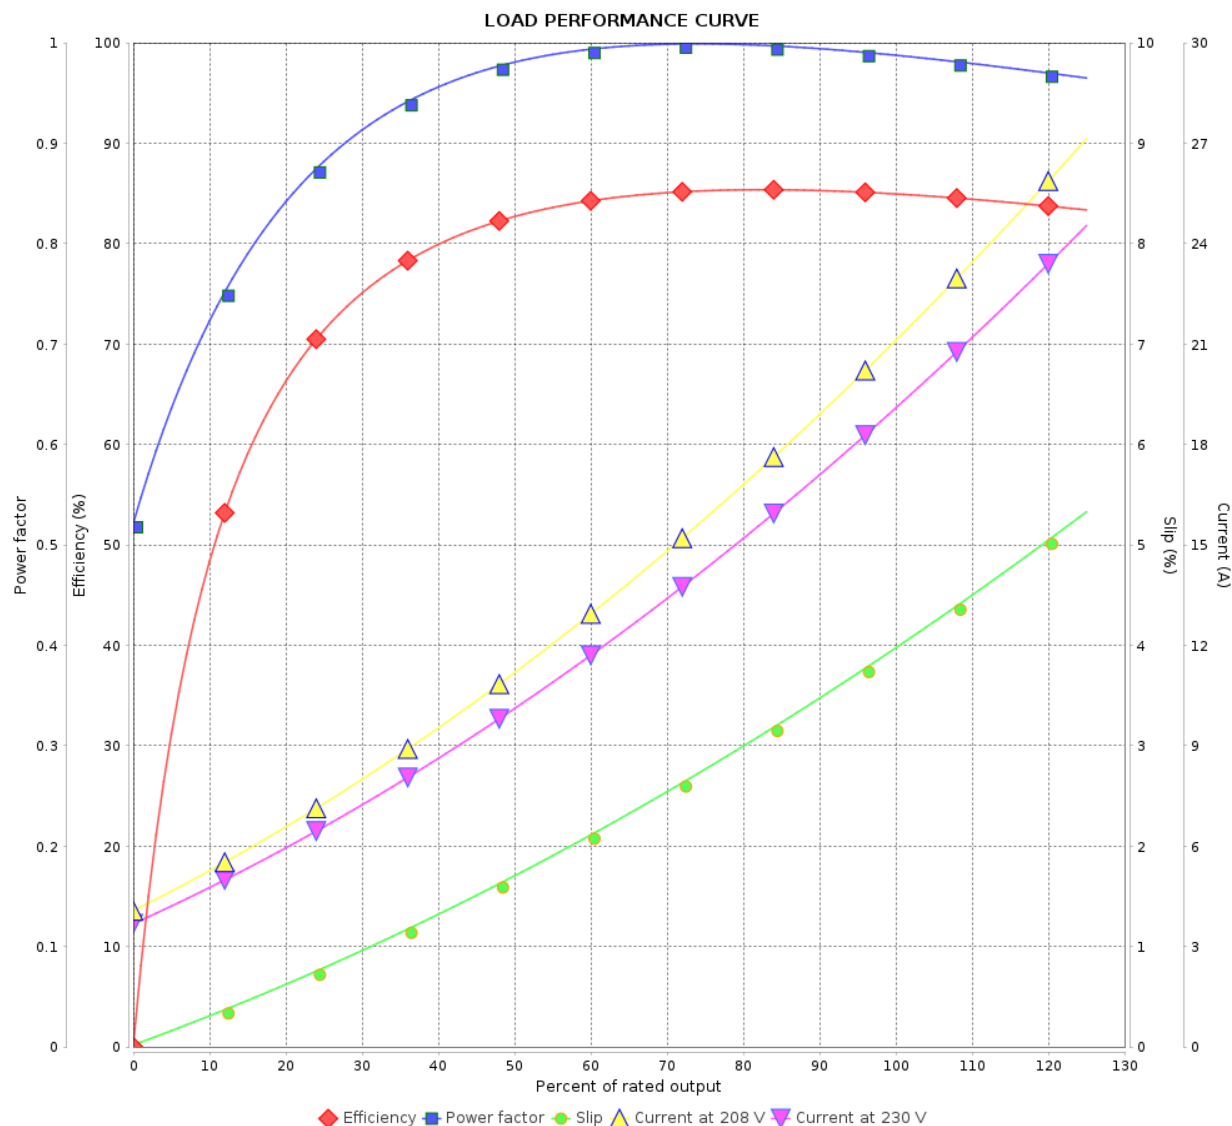

Performance : 208-230 V 60 Hz 2P

Rated current : 21.0-19.1 A
LRC : 6.5
Rated torque : 1.05 kgfm
Locked rotor torque : 220 %
Breakdown torque : 200 %
Rated speed : 3455 rpm

Moment of inertia (J) : 0.0030 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor :
Temperature rise : 105 K

| Rev. | Changes Summary | | Performed | Checked | Date |
|--------------|-----------------|--|-----------|---------------|----------|
| | | | | | |
| Performed by | | | | Page 2 / 2 | Revision |
| Checked by | | | | | |
| Date | 30/07/2025 | | | | |