

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Product code : 14742134
Efficiency Three-Phase

| | | | |
|-----------------------|---------------------------|-----------------------------|------------------------|
| Frame | : 143/5TC | Locked rotor time | : 25s (cold) 14s (hot) |
| Output | : 1.5 HP (1.1 kW) | Temperature rise | : 80 K |
| Poles | : 4 | Duty cycle | : Cont.(S1) |
| Frequency | : 60 Hz | Ambient temperature | : -20°C to +40°C |
| Rated voltage | : 575 V | Altitude | : 1000 m.a.s.l. |
| Rated current | : 1.68 A | Protection degree | : IP55 |
| L. R. Amperes | : 14.1 A | Cooling method | : IC411 - TEFC |
| LRC | : 8.4x(Code L) | Mounting | : F-1 |
| No load current | : 0.960 A | Rotation ¹ | : Both (CW and CCW) |
| Rated speed | : 1755 rpm | Noise level ² | : 51.0 dB(A) |
| Slip | : 2.50 % | Starting method | : Direct On Line |
| Rated torque | : 0.620 kgfm | Approx. weight ³ | : 27.6 kg |
| Locked rotor torque | : 290 % | | |
| Breakdown torque | : 350 % | | |
| Insulation class | : F | | |
| Service factor | : 1.25 | | |
| Moment of inertia (J) | : 0.0060 kgm ² | | |
| Design | : B | | |

| | | | | | |
|----------------|------|------|------|------------------|----------|
| Output | 50% | 75% | 100% | Foundation loads | |
| Efficiency (%) | 82.5 | 85.5 | 86.5 | Max. traction | : 48 kgf |
| Power Factor | 0.54 | 0.67 | 0.76 | Max. compression | : 75 kgf |

Losses at normative operating points (speed;torque), in percentage of rated output power

| P1 (0,9;1,0) | P2 (0,5;1,0) | P3 (0,25;1,0) | P4 (0,9;0,5) | P5 (0,5;0,5) | P6 (0,5;0,25) | P7 (0,25;0,25) |
|--------------|--------------|---------------|--------------|--------------|---------------|----------------|
| 14.7 | 12.1 | 12.0 | 8.7 | 6.1 | 4.9 | 3.6 |

| | | | |
|----------------------|---|------------------|----------------------|
| | | <u>Drive end</u> | <u>Non drive end</u> |
| Bearing type | : | 6205 ZZ | 6204 ZZ |
| Sealing | : | V'Ring | Lip Seal |
| Lubrication interval | : | - | - |
| Lubricant amount | : | - | - |
| Lubricant type | : | 00088 | |

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------|----------|
| | | | | |
| Performed by | | | | |
| Checked by | | | | |
| Date | 14/11/2025 | | | |
| | | | Page | Revision |
| | | | 1 / 3 | |

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Brake information

Voltage: 525-575 V
Brake Torque: 1.63 kgfm

| Rev. | Changes Summary | | Performed | Checked | Date |
|--------------|-----------------|--|---------------|---------|----------|
| | | | | | |
| Performed by | | | Page 2 / 3 | | Revision |
| Checked by | | | | | |
| Date | 14/11/2025 | | | | |


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Product code : 14742134
Efficiency Three-Phase

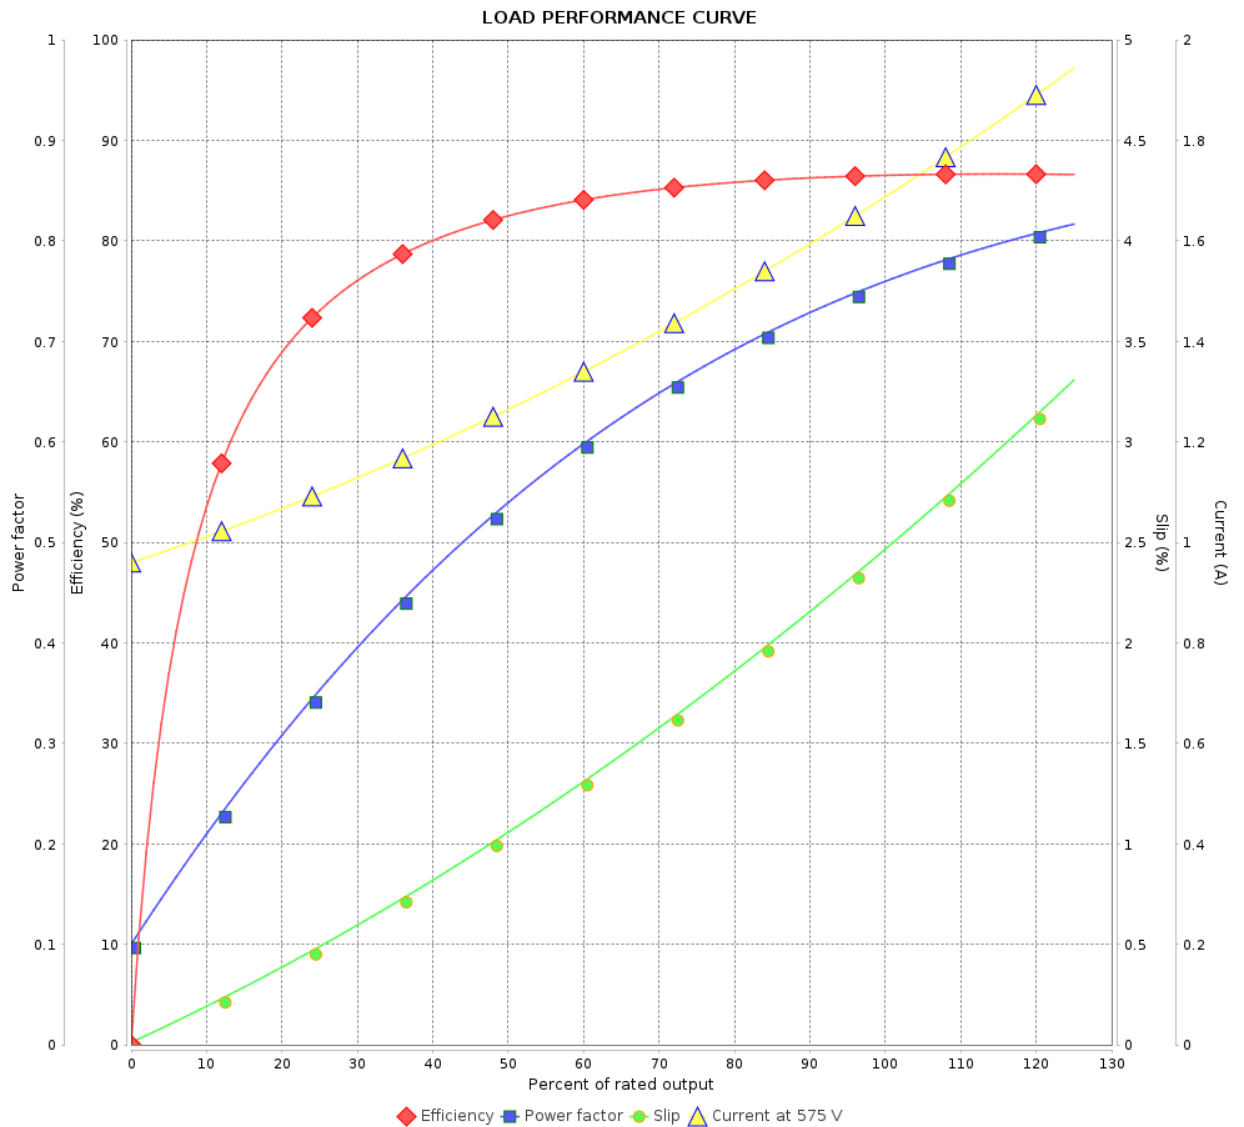

Performance : 575 V 60 Hz 4P

| | | | |
|---------------------|--------------|-----------------------|---------------------------|
| Rated current | : 1.68 A | Moment of inertia (J) | : 0.0060 kgm ² |
| LRC | : 8.4 | Duty cycle | : Cont.(S1) |
| Rated torque | : 0.620 kgfm | Insulation class | : F |
| Locked rotor torque | : 290 % | Service factor | : 1.25 |
| Breakdown torque | : 350 % | Temperature rise | : 80 K |
| Rated speed | : 1755 rpm | Design | : B |

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | | |
| Checked by | | | | |
| Date | 14/11/2025 | | Page 3 / 3 | Revision |