
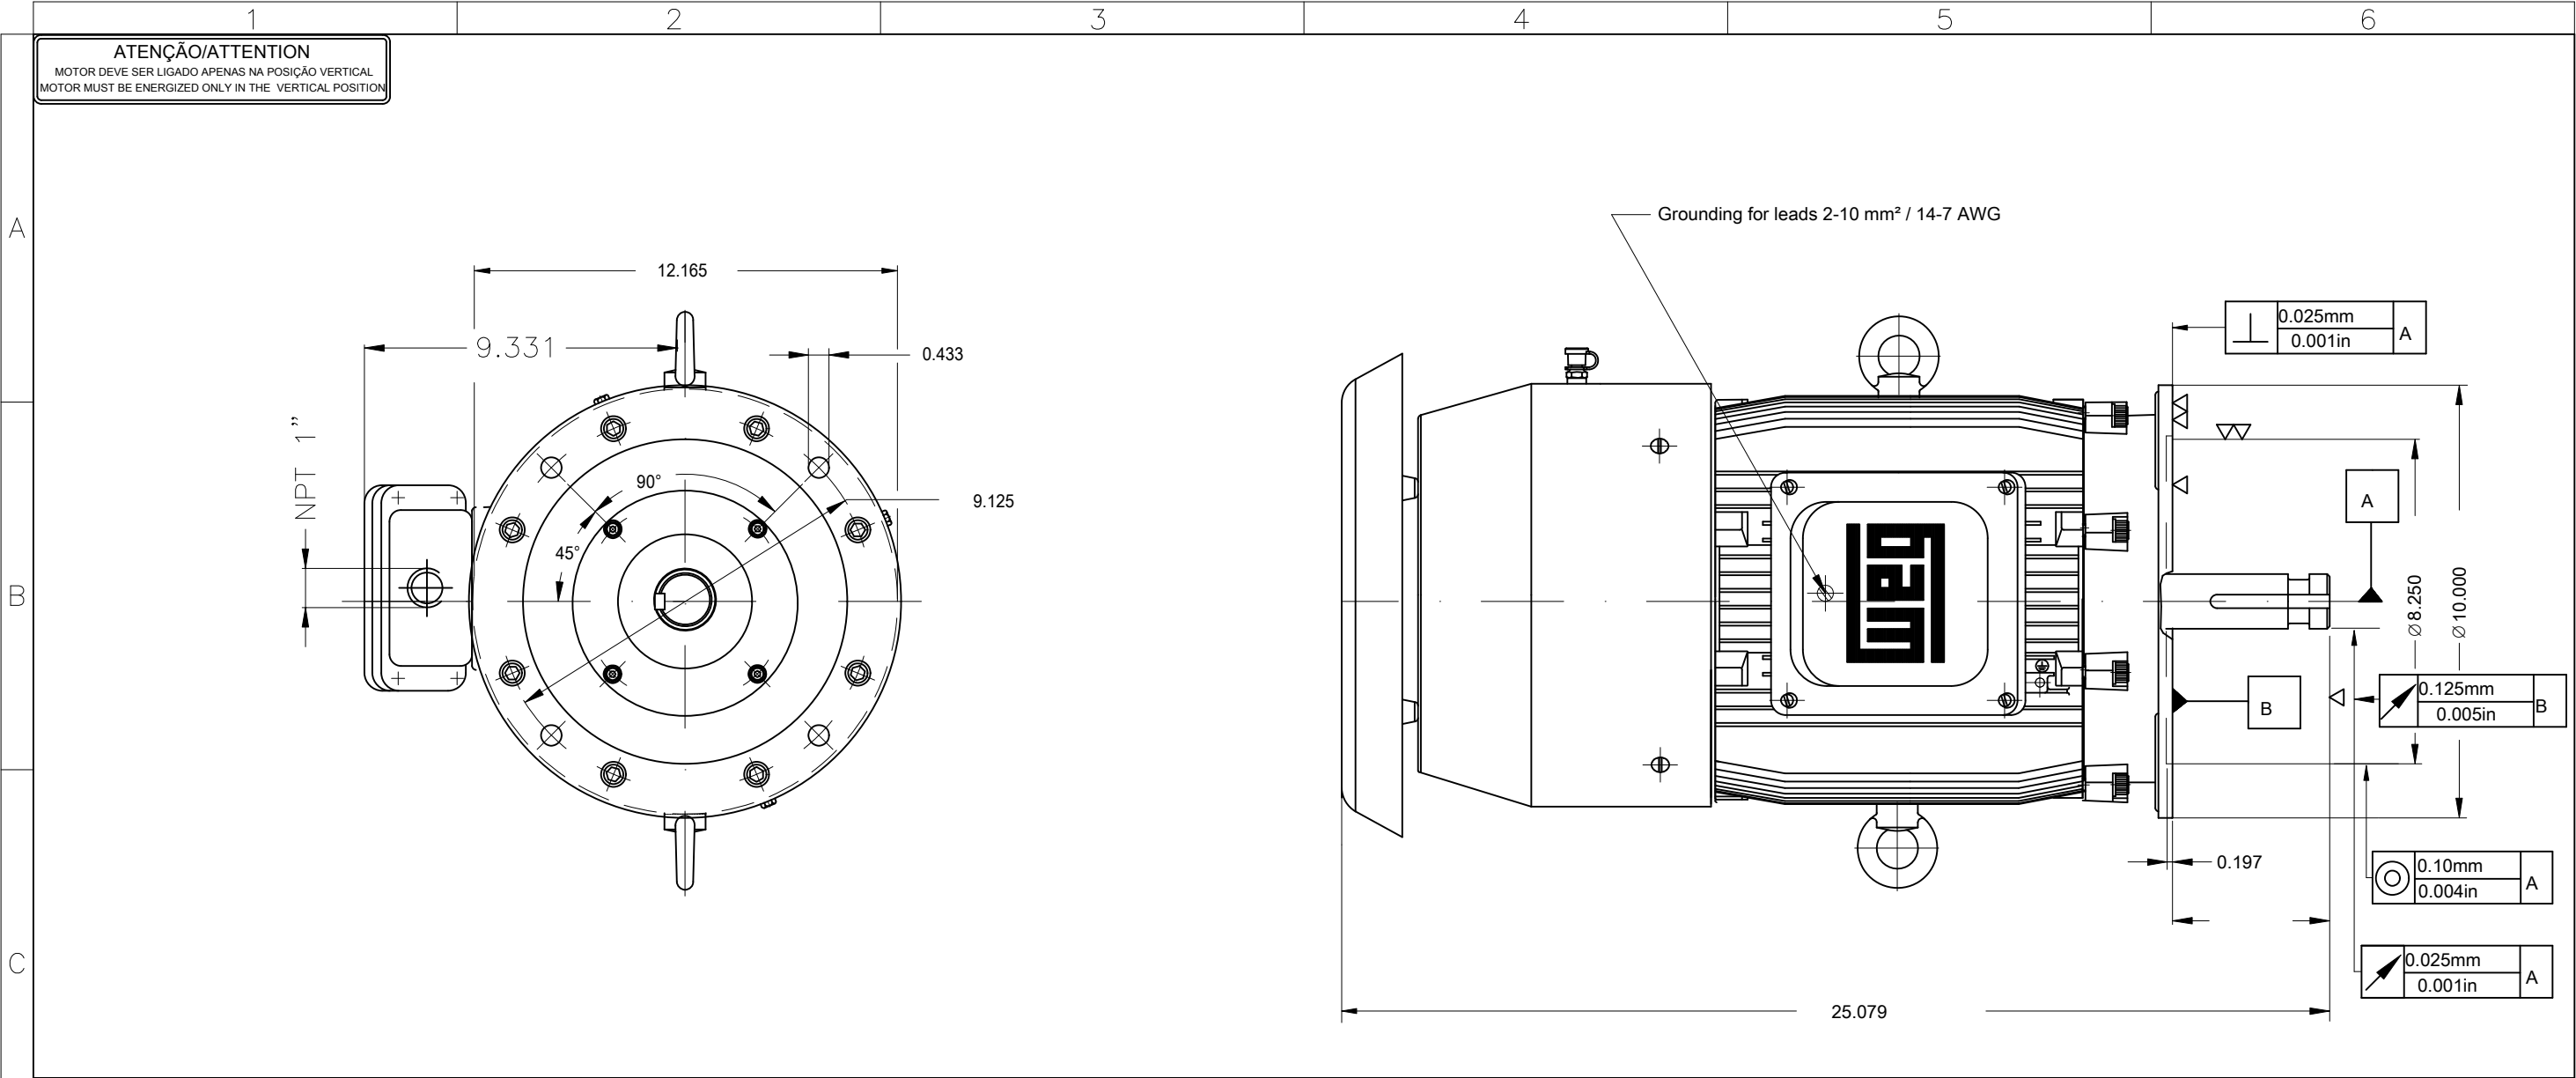


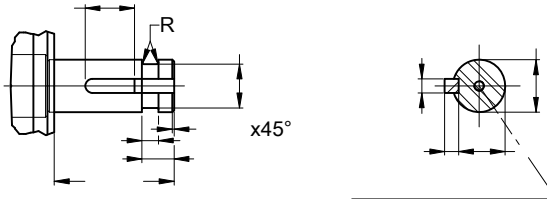

D	Reduced balancing with half key	DE Shaft End 											
	Packing - crate												
	Plastic flat plug												
	Shaft material - SAE/ABNT 1040/45												
	B key												
	With drip cover												
	Fan cover - steel plate												
	NDE sealing - lip seal												
	Sealing - oil seal ring												
	Without epoxi in the cables outlet												
	Grease - Mobil Polyrex EM												
	Bearing cap												
	Without terminal block												
	Without overload protector at bearing												
Without Space Heaters													
Without thermal protection on bearings													
Without alarm thermal protection													
Without switch off thermal protection													
Rubber drain plug													
E	With grease fitting												
	Aluminum fan												
	Color RAL 5009												
	Painting plan 207A												
	Mounting NEMA W-6												
	Mounting V1												
7.5 HP 02 Poles 60 Hz										A			
								</					