

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12264596

Frame : 213/5TD	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 78.0 kg
Protection degree : IP55	Moment of inertia (J) : 0.0636 kgm ²
Design : B	

Output [HP]	10	7.5	7.5	7.5	10	10	10
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	25.3/12.7	11.5	11.4	11.3	15.2	14.4	14.1
L. R. Amperes [A]	162/81.1	86.2	91.5	96.1	90.9	93.6	98.8
LRC [A]	6.4x(Code H)	7.5x(Code J)	8.0x(Code K)	8.5x(Code L)	6.0x(Code G)	6.5x(Code H)	7.0x(Code H)
No load current [A]	11.6/5.80	5.60	6.00	6.35	5.60	6.00	6.35
Rated speed [RPM]	1765	1470	1475	1475	1450	1455	1460
Slip [%]	1.94	2.00	1.67	1.67	3.33	3.00	2.67
Rated torque [kgfm]	4	3	3	3	5	4	4
Locked rotor torque [%]	240	200	240	260	165	180	190
Breakdown torque [%]	295	300	340	360	220	250	270
Service factor	1.25	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	30s (cold) 17s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	0s (cold) 0s (hot)
Noise level ²	58.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)
Efficiency (%)	25%						
	50%	91.0	90.0	89.2	88.7	88.0	90.3
	75%	91.7	90.0	89.9	89.8	88.5	90.2
	100%	91.7	89.8	90.1	90.3	88.5	90.2
Power Factor	25%						
	50%	0.65	0.61	0.57	0.53	0.72	0.64
	75%	0.76	0.74	0.70	0.67	0.81	0.76
	100%	0.81	0.81	0.77	0.75	0.85	0.82

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	8.8	11.0	10.7	10.4	12.6	11.4	10.5
	P2 (0,5;1,0)	7.3	9.2	8.9	8.7	10.5	9.5	8.8
	P3 (0,25;1,0)	7.1	8.9	8.6	8.4	10.2	9.2	8.5
	P4 (0,9;0,5)	4.6	5.7	5.6	5.4	6.6	5.9	5.5
	P5 (0,5;0,5)	3.2	4.0	3.8	3.8	4.5	4.1	3.8
	P6 (0,5;0,25)	2.2	2.8	2.7	2.6	3.2	2.9	2.7
	P7 (0,25;0,25)	1.5	1.9	1.9	1.8	2.2	2.0	1.9

Bearing type : 6308 ZZ	Non drive end : 6207 ZZ	Foundation loads
Sealing : V'Ring	V'Ring	Max. traction : 207 kgf
Lubrication interval : -	-	Max. compression : 289 kgf
Lubricant amount : -	-	
Lubricant type : 00088		

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	24/09/2026		Page 1 / 9	Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 27.4A SF 1.15 SFA 31.5A

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 9		Revision
Checked by					
Date	24/09/2026				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12264596

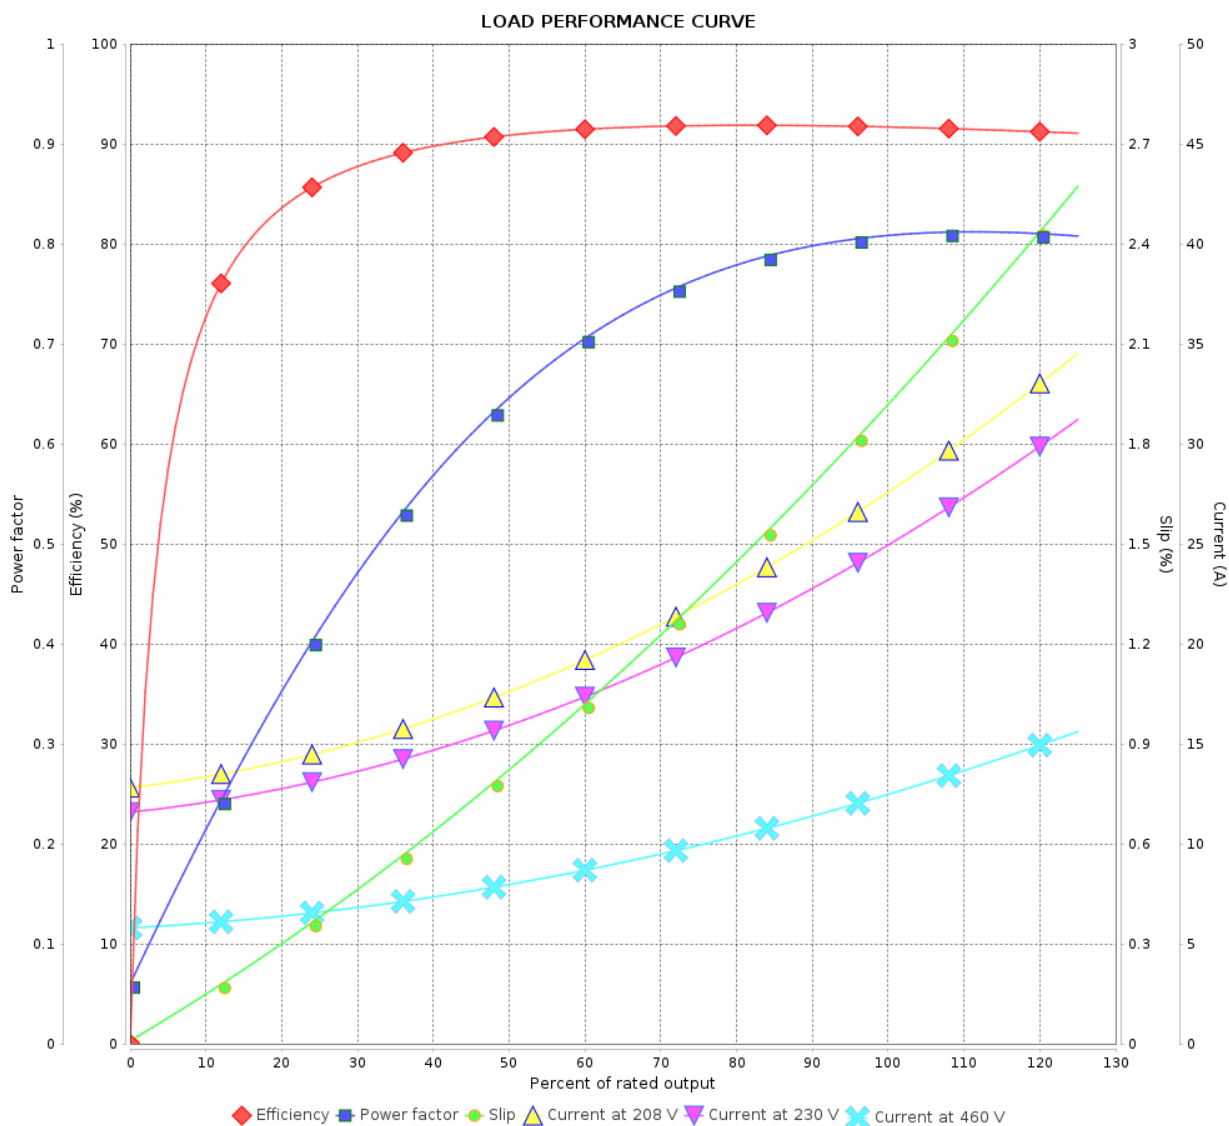

Performance : 230/460 V 60 Hz 4P

Rated current : 25.3/12.7 A
LRC : 6.4
Rated torque : 4 kgfm
Locked rotor torque : 240 %
Breakdown torque : 295 %
Rated speed : 1765 rpm

Moment of inertia (J) : 0.0636 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 9Revision		
Checked by				
Date	24/09/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12264596

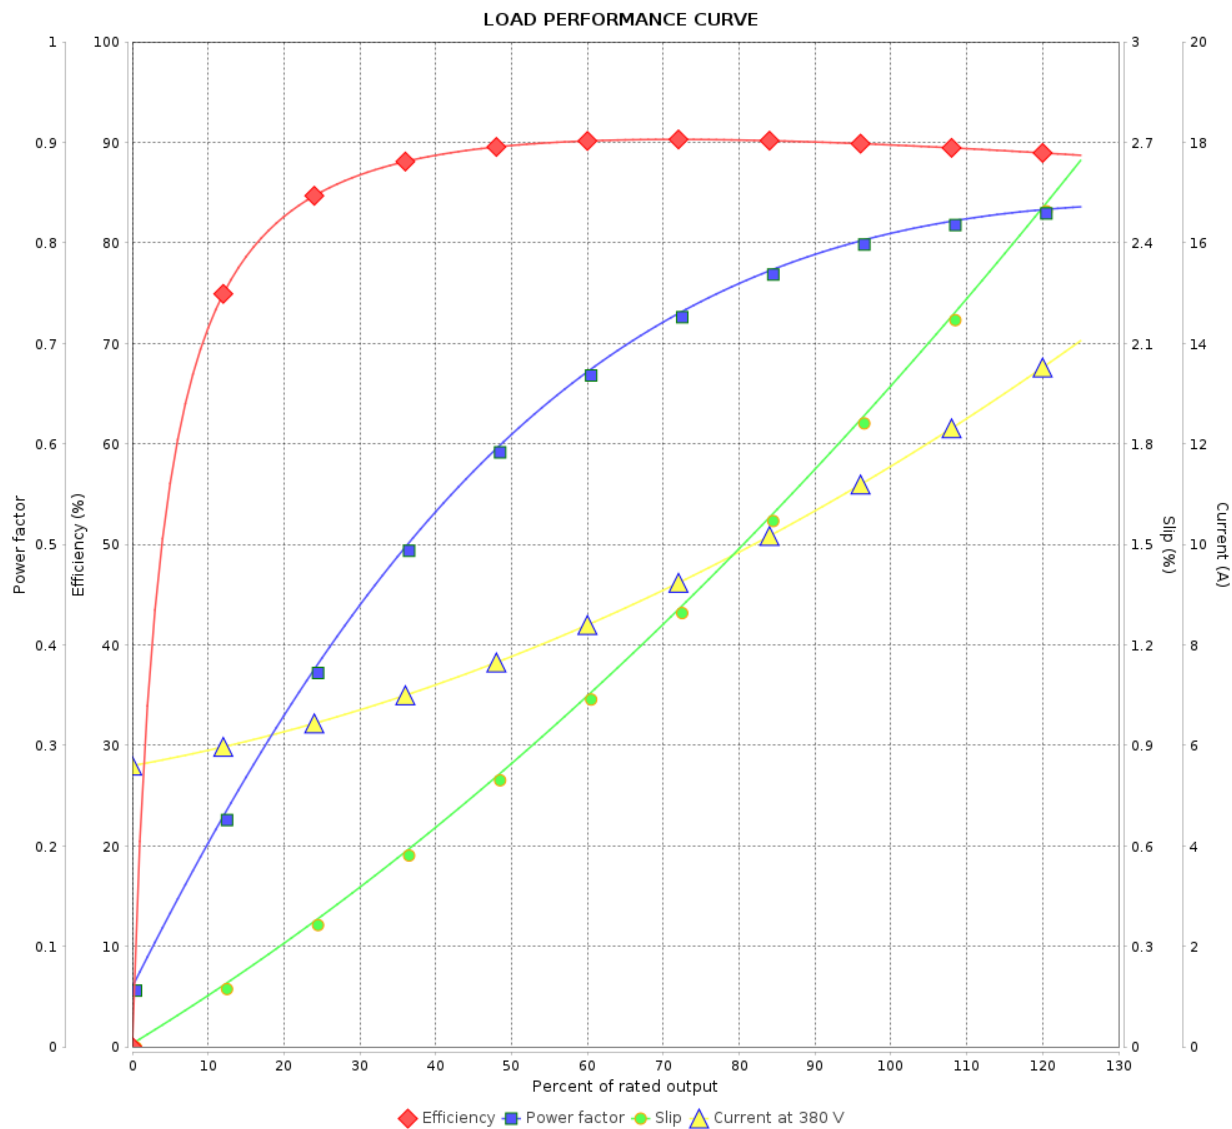

Performance : 380 V 50 Hz 4P IE3

Rated current : 11.5 A
LRC : 7.5
Rated torque : 3 kgfm
Locked rotor torque : 200 %
Breakdown torque : 300 %
Rated speed : 1470 rpm

Moment of inertia (J) : 0.0636 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 4 / 9Revision	
Checked by					
Date	24/09/2026				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12264596

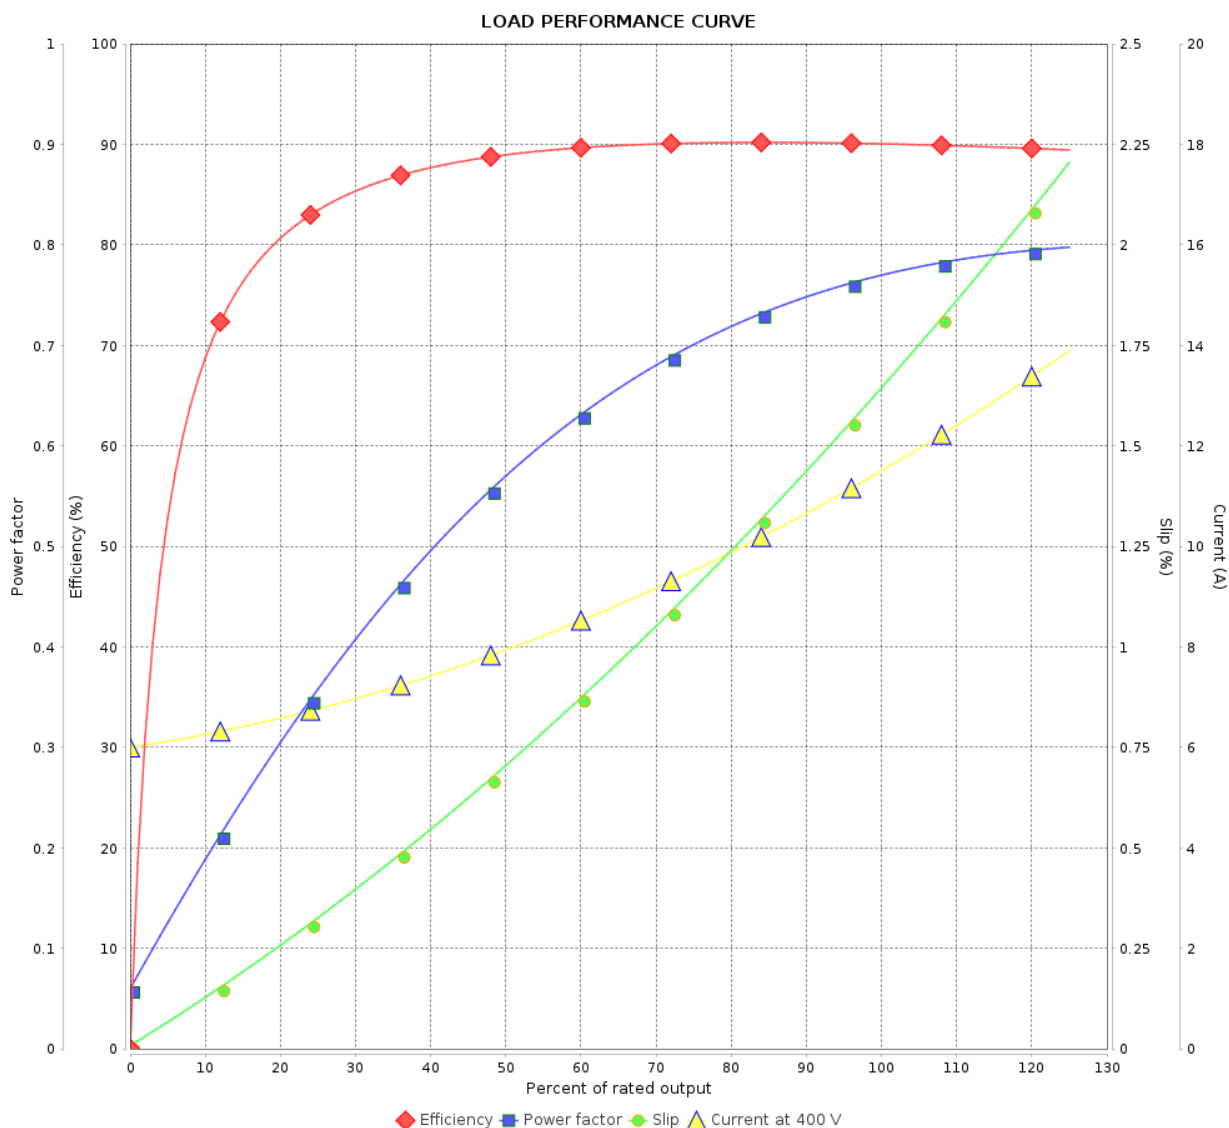

Performance : 400 V 50 Hz 4P IE3

Rated current : 11.4 A
LRC : 8.0
Rated torque : 3 kgfm
Locked rotor torque : 240 %
Breakdown torque : 340 %
Rated speed : 1475 rpm

Moment of inertia (J) : 0.0636 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 5 / 9Revision		
Checked by				
Date	24/09/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12264596

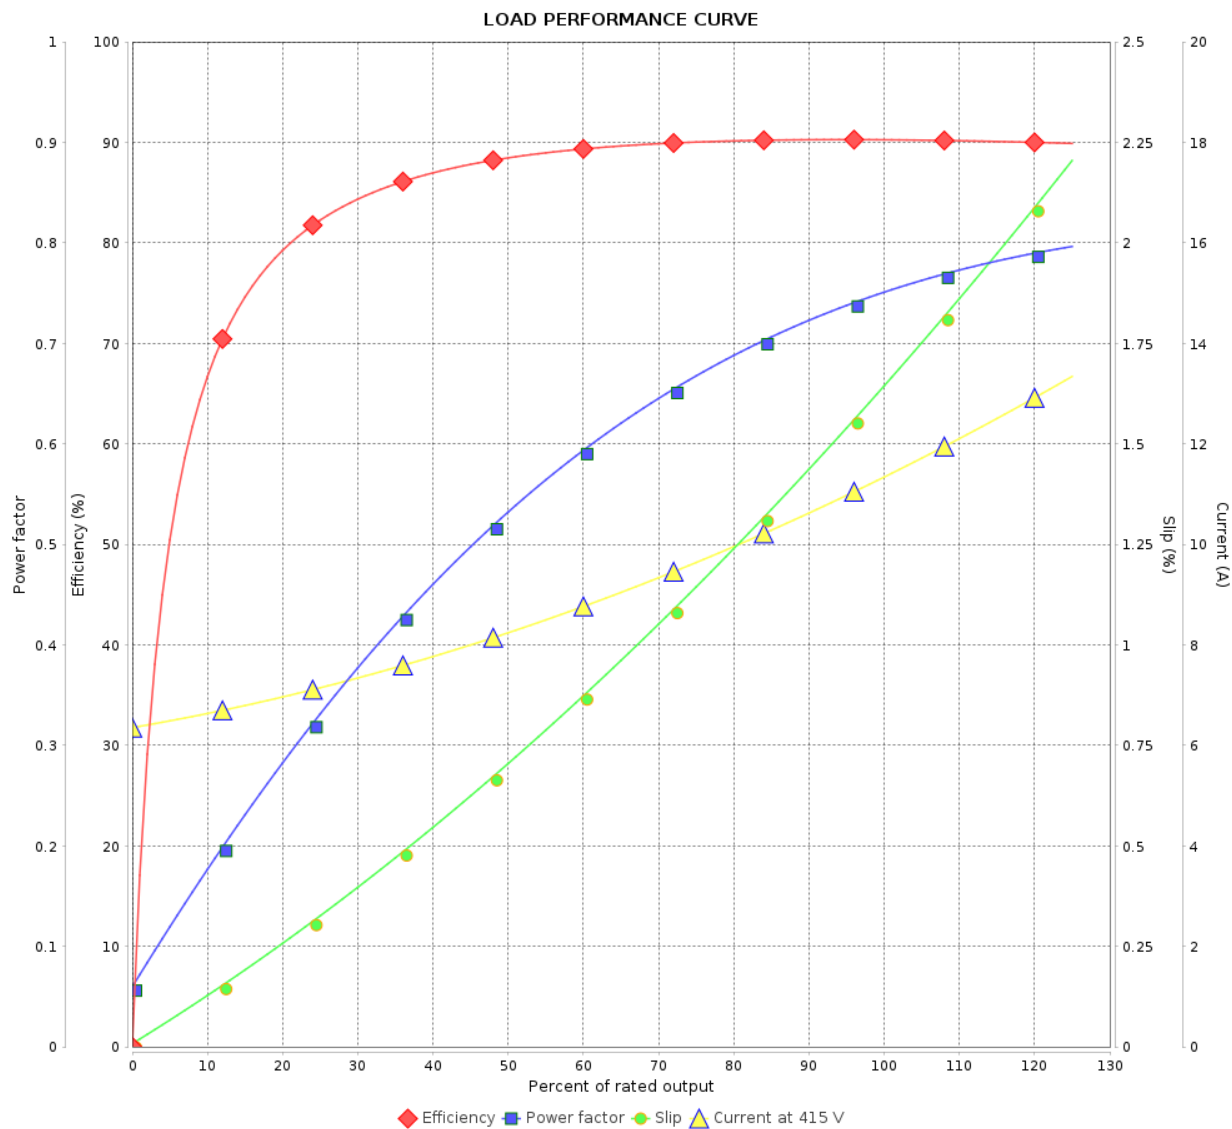

Performance : 415 V 50 Hz 4P IE3

Rated current : 11.3 A
LRC : 8.5
Rated torque : 3 kgfm
Locked rotor torque : 260 %
Breakdown torque : 360 %
Rated speed : 1475 rpm

Moment of inertia (J) : 0.0636 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 6 / 9	Revision
Checked by					
Date	24/09/2026				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12264596

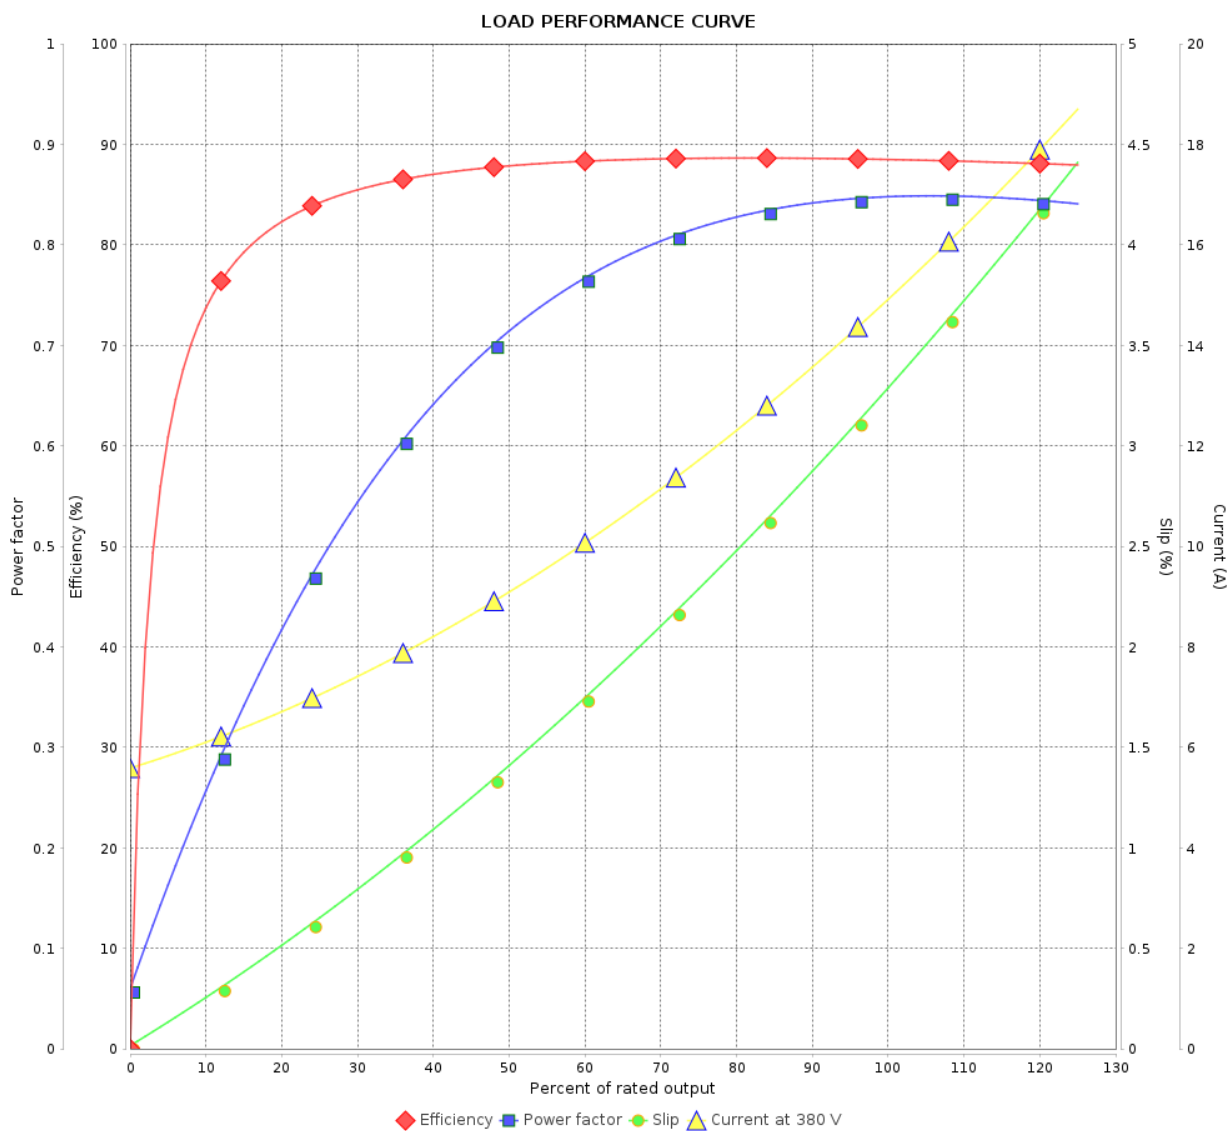

Performance : 380 V 50 Hz 4P IE1

Rated current : 15.2 A
LRC : 6.0
Rated torque : 5 kgfm
Locked rotor torque : 165 %
Breakdown torque : 220 %
Rated speed : 1450 rpm

Moment of inertia (J) : 0.0636 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	24/09/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12264596

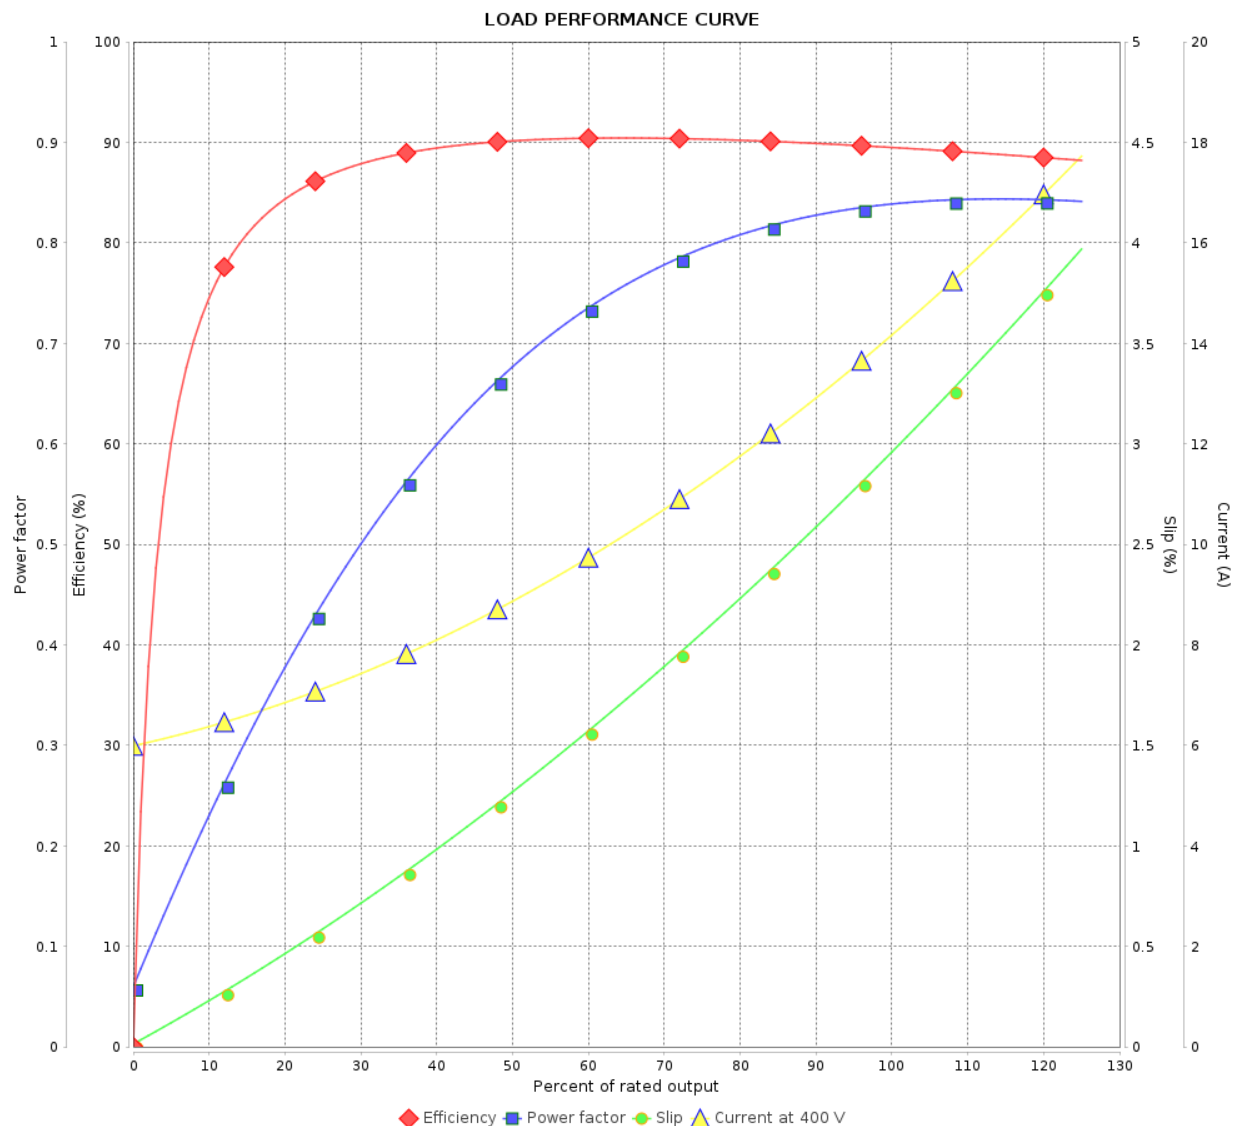

Performance : 400 V 50 Hz 4P IE2

Rated current : 14.4 A
LRC : 6.5
Rated torque : 4 kgfm
Locked rotor torque : 180 %
Breakdown torque : 250 %
Rated speed : 1455 rpm

Moment of inertia (J) : 0.0636 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 8 / 9	Revision
Checked by					
Date	24/09/2026				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12264596

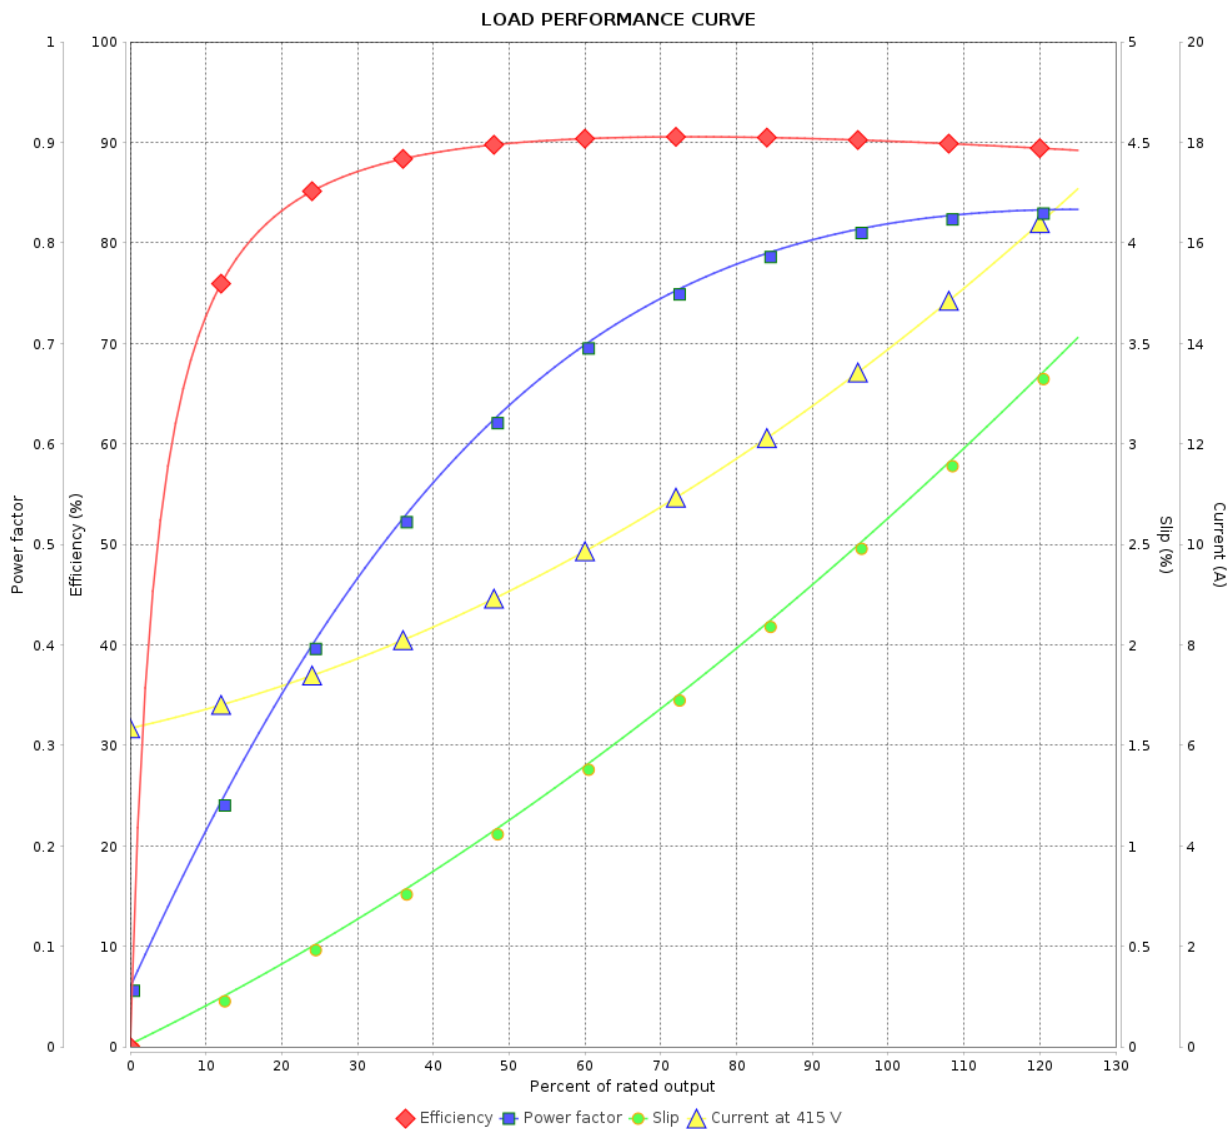

Performance : 415 V 50 Hz 4P IE2

Rated current : 14.1 A
LRC : 7.0
Rated torque : 4 kgfm
Locked rotor torque : 190 %
Breakdown torque : 270 %
Rated speed : 1460 rpm

Moment of inertia (J) : 0.0636 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 9 / 9	Revision
Checked by					
Date	24/09/2026				