

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - J type Premium Efficiency Three-Phase Product code : 15597826

Frame	: W56J	Locked rotor time	: 43s (cold) 24s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 1.76/0.879 A	Cooling method	: IC01 - ODP
L. R. Amperes	: 12.8/6.42 A	Mounting	: F-1
LRC	: 7.3x(Code M)	Rotation ¹	: CCW
No load current	: 1.20/0.600 A	Noise level ²	: 62.0 dB(A)
Rated speed	: 3450 rpm	Vibration	: A
Slip	: 4.17 %	Starting method	: Direct On Line
Rated torque	: 0 kgfm	Approx. weight ³	: 6.7 kg
Locked rotor torque	: 370 %	Painting plan	: 207N (ISO 12944 - C2)
Breakdown torque	: 400 %	Color	: Munsell N 1 - Matte
Insulation class	: F		
Service factor	: 1.60		
Moment of inertia (J)	: 0.0006 kgm ²		

Output	25%	50%	75%	100%	Foundation loads
Efficiency (%)	0.000	62.0	68.0	73.4	Max. traction : 10 kgf
Power Factor	0.00	0.53	0.65	0.72	Max. compression : 16 kgf

	Drive end	Non drive end
Bearing type	: 6203 2RS	: 6202 2RS
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: 0 h	: 0 h
Lubricant amount	: 0 g	: 0 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	10/10/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel Jet Pump - J type
Premium Efficiency Three-Phase

Product code : 15597826

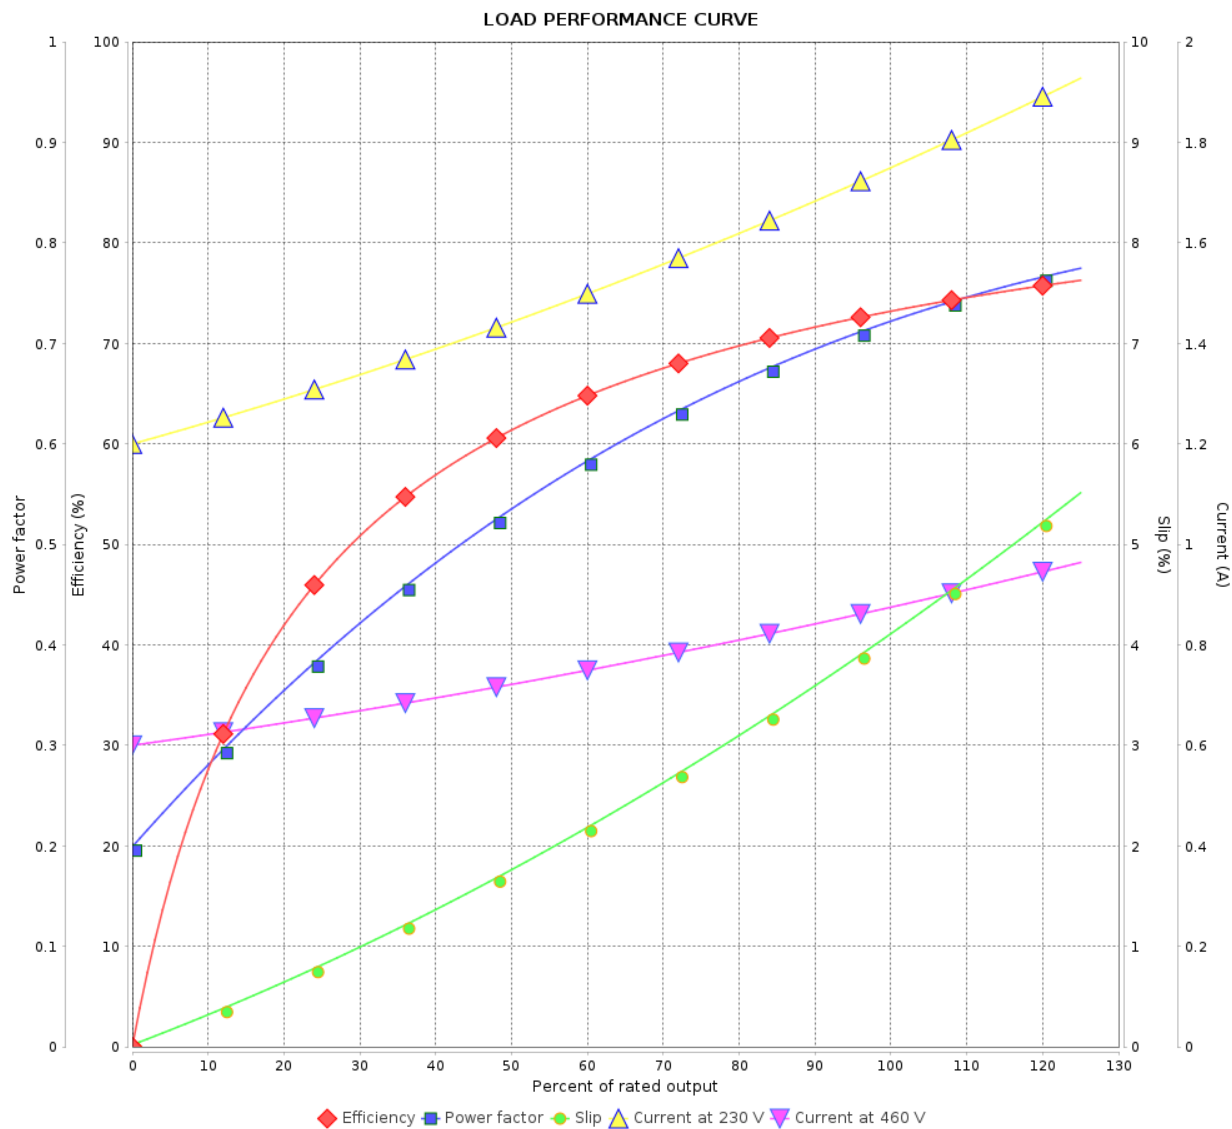

Performance : 230/460 V 60 Hz 2P

Rated current : 1.76/0.879 A
LRC : 7.3
Rated torque : 0 kgfm
Locked rotor torque : 370 %
Breakdown torque : 400 %
Rated speed : 3450 rpm

Moment of inertia (J) : 0.0006 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.60
Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 2 / 2Revision			
Checked by					
Date	10/10/2026				