


DATA SHEETPRELIMINARY
DOCUMENT**Three Phase Induction Motor - Squirrel Cage**

Customer :

Product line : W22 IEEE 841 - Nema Premium Efficiency
Product code : 13731786

Frame	: 364/5T	Locked rotor time	: 25 s (hot) 45 s (cold)
Output	: 30 HP (22 kW)	Temperature rise ⁴	: 80 K
Poles	: 8	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l
Rated current	: 30.5 A	Protection degree	: IP56
L. R. Amperes	: 189 A	Cooling method	: IC411 - TEFC
LRC	: 6.2 Code G	Mounting	: B3R(D)
No load current	: 12.8 A	Rotation ¹	: Both
Rated speed	: 882 rpm	Noise level ²	: 60 dB(A)
Slip	: 2.00 %	Starting method	: Direct On Line
Rated torque	: 24.7 kgfm	Approx. weight ³	: 362 kg
Locked rotor torque	: 160 %	Design	: B
Pull up torque	: 165 %		
Breakdown torque	: 230 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.9884 kgm ²		

Output	Start	50%	75%	100%	Load type	: -
Efficiency (%)	-	91.5	91.7	91.7	Load torque	: -
Power Factor	0.36	0.62	0.73	0.79	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads	
Bearing type	6314-C3	6314-C3	Max. traction	: 449 kgf
Lubrication interval	20000 h	20000 h	Max. compression	: 811 kgf
Lubricant amount	27 g	27 g		
Lubricant type	MOBIL POLYREX EM			

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.88	7.75	7.18	3.89	2.81	1.73	1.28

Standards	Specification	: MG1 - Part 10	Vibration	: IEEE841 - 6.9
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..

(1) Looking the motor from the shaft end.

(2) Measured at 1m and with tolerance of +0dB(A).

(3) Approximate weight, subject to be changed after manufacturing process.

(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Performed	Checked	Date
					2026/10/22
Performed by				Page 1/2	Revision 0
Checked by					
Date	2026/10/22				

LOAD PERFORMANCE CURVE


PRELIMINARY
DOCUMENT



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 IEEE 841 - Nema Premium Efficiency
Product code : 13731786

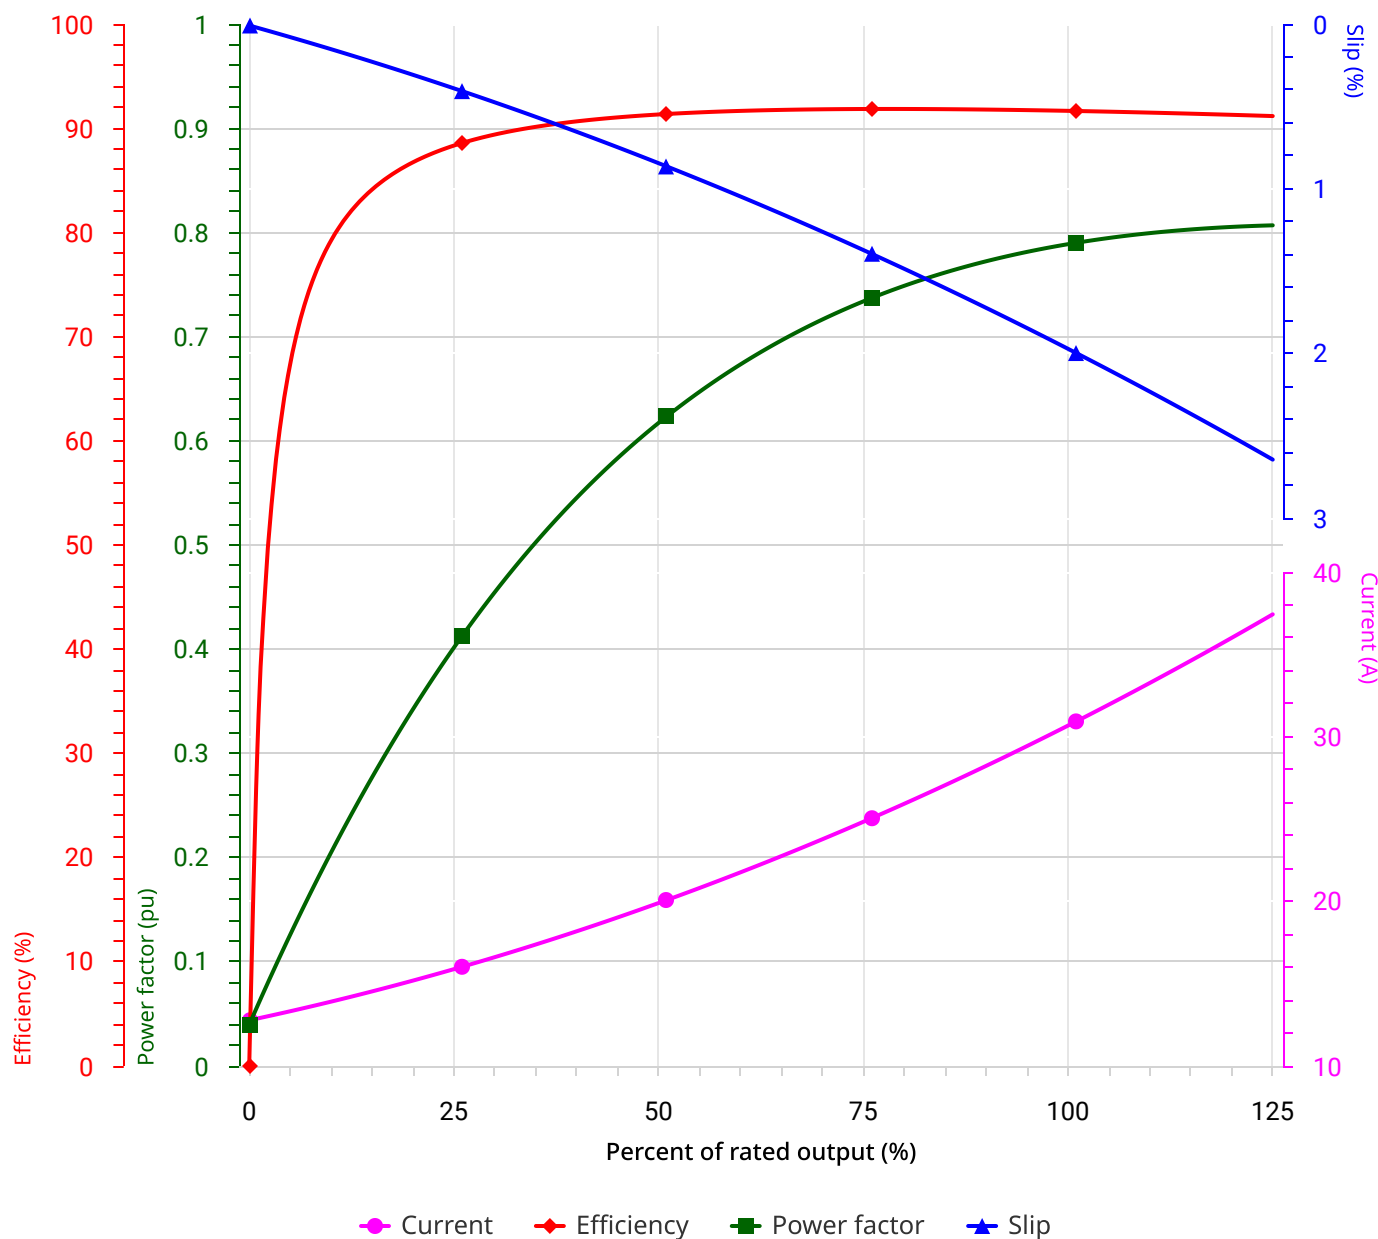

Performance : 30 HP (22 kW) 575V 60Hz 8P 364/5T

Rated current : 30.5 A	Moment of inertia (J) : 0.9884 kgm ²
LRC : 6.2 Code G	Duty cycle : Cont.(S1)
Rated torque : 24.7 kgfm	Insulation class : F
Locked rotor torque : 160 %	Service factor : 1.25
Breakdown torque : 230 %	Temperature rise : 80 K
Rated speed : 882 rpm	Design : B

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/22
Performed by		Page 2/2 Revision 0		
Checked by				
Date	2026/10/22			