

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer	:			
Product line	: Single-Phase	Product code : 13711220		
Frame	: 56H	Cooling method : IC411 - TEFC		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation ¹ : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³ : 26.2 kg		
Protection degree	: IP55	Moment of inertia (J) : 0.0068 kgm ²		
Design	: L			
Output [HP]		2		
Poles		4		
Frequency [Hz]		60		
Rated voltage [V]		115/208-230		
Rated current [A]		18.8/10.0-9.41		
L. R. Amperes [A]		141/75.0-70.6		
LRC [A]		7.5x(Code K)		
No load current [A]		8.80/3.79-4.40		
Rated speed [RPM]		1735		
Slip [%]		3.61		
Rated torque [kgfm]		0.837		
Locked rotor torque [%]		290		
Breakdown torque [%]		250		
Service factor				
Temperature rise		80 K		
Locked rotor time		34s (cold) 19s (hot)		
Noise level ²		54.0 dB(A)		
Efficiency (%)	25%			
	50%	80.0		
	75%	82.5		
	100%	82.5		
Power Factor	25%			
	50%	0.71		
	75%	0.79		
	100%	0.84		
Bearing type	: Drive end : 6204 ZZ Non drive end : 6202 ZZ	Foundation loads		
Sealing	: V'Ring V'Ring	Max. traction : 53 kgf		
Lubrication interval	: - -	Max. compression : 79 kgf		
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>		<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer :

Product line : Single-Phase

Product code : 13711220

LOAD PERFORMANCE CURVE

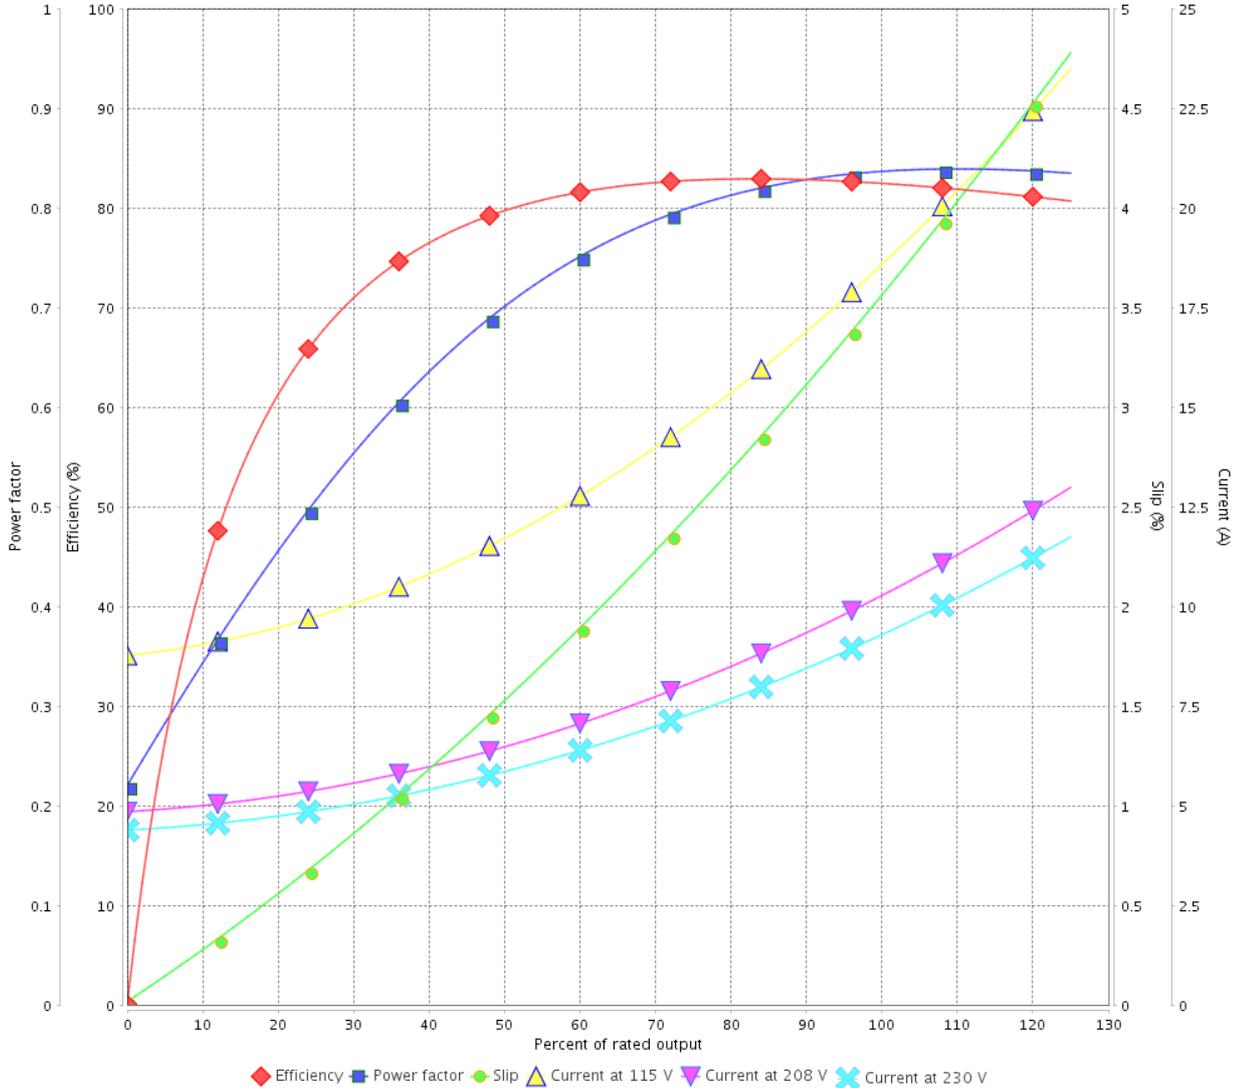

Performance : 115/208-230 V 60 Hz 4P

Rated current : 18.8/10.0-9.41 A
 LRC : 7.5
 Rated torque : 0.837 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 250 %
 Rated speed : 1735 rpm

Moment of inertia (J) : 0.0068 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : L

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				