

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer	:			
Product line	: Standard Efficiency Three-Phase	Product code : 13417435		
Frame	: 56H	Cooling method : IC411 - TEFC		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup> : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup> : 18.2 kg		
Protection degree	: IP55	Moment of inertia (J) : 0.0054 kgm <sup>2</sup>		
Design	: A			
Output [HP]		3		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		3.01		
L. R. Amperes [A]		25.6		
LRC [A]		8.5x(Code K)		
No load current [A]		1.12		
Rated speed [RPM]		3480		
Slip [%]		3.33		
Rated torque [kgfm]		0.626		
Locked rotor torque [%]		270		
Breakdown torque [%]		280		
Service factor		1.15		
Temperature rise		80 K		
Locked rotor time		10s (cold) 6s (hot)		
Noise level <sup>2</sup>		68.0 dB(A)		
Efficiency (%)	25%			
	50%	80.0		
	75%	81.5		
	100%	81.5		
Power Factor	25%			
	50%	0.76		
	75%	0.86		
	100%	0.90		
Bearing type	: <u>Drive end</u> 6204 ZZ <u>Non drive end</u> 6202 ZZ	Foundation loads		
Sealing	: V'Ring    V'Ring	Max. traction : 47 kgf		
Lubrication interval	: -    -	Max. compression : 65 kgf		
Lubricant amount	: -    -			
Lubricant type	: Mobil Polyrex EM			
Notes				
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>		<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13417435

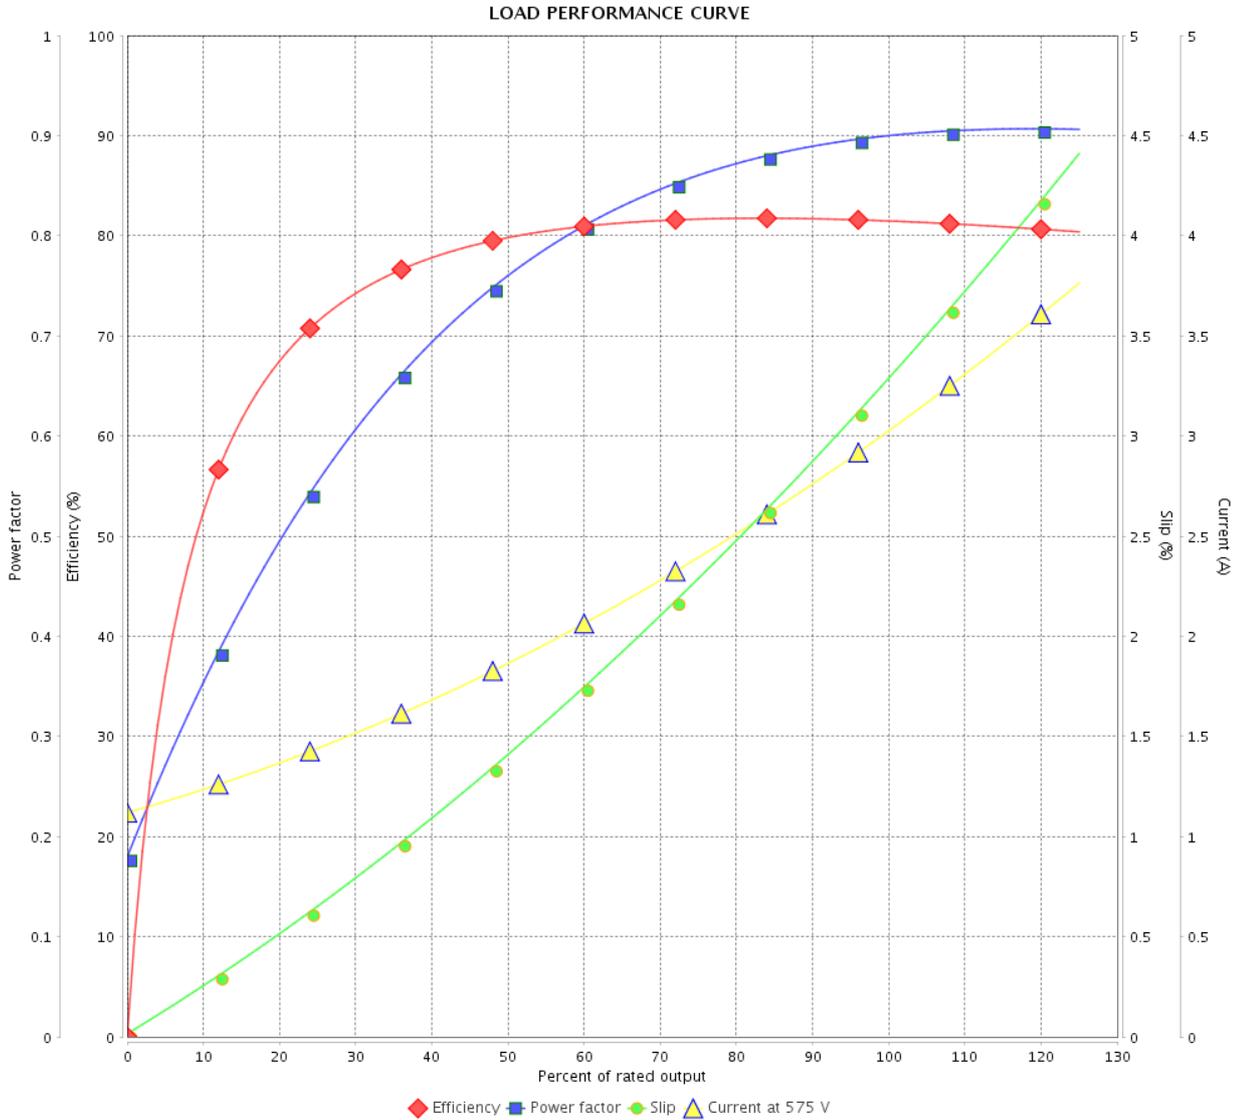

Performance : 575 V 60 Hz 2P

Rated current	: 3.01 A	Moment of inertia (J)	: 0.0054 kgm <sup>2</sup>
LRC	: 8.5	Duty cycle	: Cont.(S1)
Rated torque	: 0.626 kgfm	Insulation class	: F
Locked rotor torque	: 270 %	Service factor	: 1.15
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 3480 rpm	Design	: A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	11/05/2022			