

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer	:			
Product line	: Three-Phase	Product code : 13989582		
Frame	: W56C	Cooling method : IC411 - TEFC		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation ¹ : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³ : 9.9 kg		
Protection degree	: IP55	Moment of inertia (J) : 0.0022 kgm ²		
Output [HP]		0.5		
Poles		4		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		0.622		
L. R. Amperes [A]		3.98		
LRC [A]		6.4x(Code J)		
No load current [A]		0.397		
Rated speed [RPM]		1730		
Slip [%]		3.89		
Rated torque [kgfm]		0.210		
Locked rotor torque [%]		229		
Breakdown torque [%]		310		
Service factor		1.15		
Temperature rise		80 K		
Locked rotor time		36s (cold) 20s (hot)		
Noise level ²		50.0 dB(A)		
Efficiency (%)	25%			
	50%	74.0		
	75%	77.0		
	100%	78.5		
Power Factor	25%			
	50%	0.54		
	75%	0.67		
	100%	0.76		
Bearing type	: <u>Drive end</u> 6203 ZZ <u>Non drive end</u> 6202 ZZ	Foundation loads		
Sealing	: V'Ring V'Ring	Max. traction : 16 kgf		
Lubrication interval	: - -	Max. compression : 25 kgf		
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>		<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Three-Phase

Product code : 13989582

LOAD PERFORMANCE CURVE

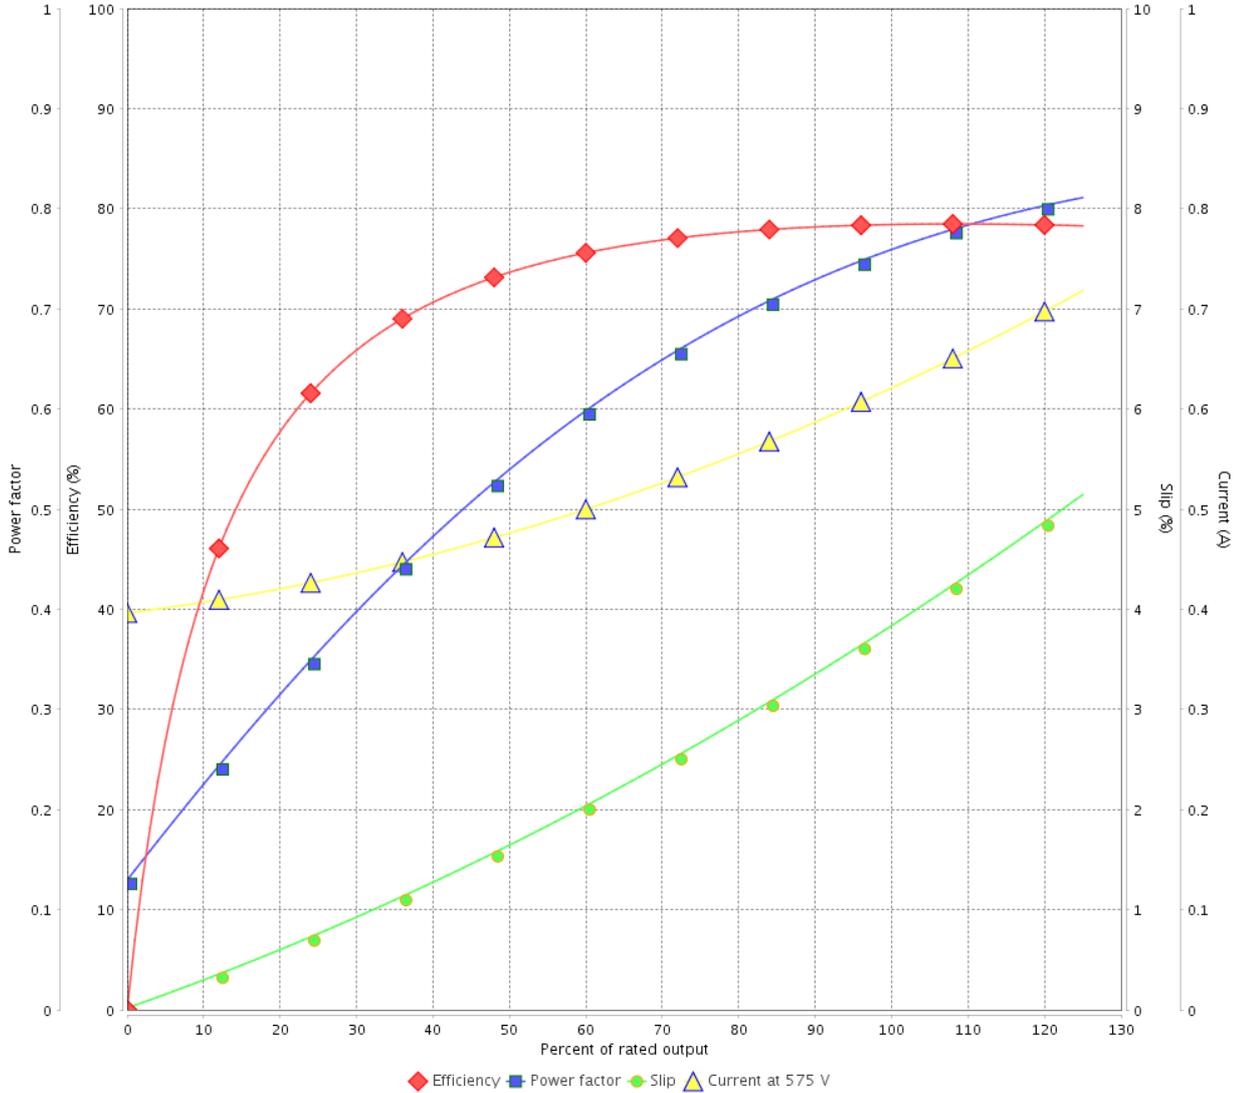

Performance : 575 V 60 Hz 4P

Rated current : 0.622 A
 LRC : 6.4
 Rated torque : 0.210 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 310 %
 Rated speed : 1730 rpm

Moment of inertia (J) : 0.0022 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	11/05/2022			