

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



| | | | | |
|--|---|--|---------|----------|
| Customer | : | | | |
| Product line | : Three-Phase | Product code : 13997238 | | |
| Frame | : 56HC | Cooling method : IC01 - ODP | | |
| Insulation class | : F | Mounting : F-1 | | |
| Duty cycle | : Cont.(S1) | Rotation ¹ : Both (CW and CCW) | | |
| Ambient temperature | : -20°C to +40°C | Starting method : Direct On Line | | |
| Altitude | : 1000 m.a.s.l. | Approx. weight ³ : 16.3 kg | | |
| Design | : A | Moment of inertia (J) : 0.0049 kgm ² | | |
| Output [HP] | | 2 | | |
| Poles | | 2 | | |
| Frequency [Hz] | | 60 | | |
| Rated voltage [V] | | 575 | | |
| Rated current [A] | | 1.94 | | |
| L. R. Amperes [A] | | 17.2 | | |
| LRC [A] | | 8.9x(Code K) | | |
| No load current [A] | | 0.734 | | |
| Rated speed [RPM] | | 3510 | | |
| Slip [%] | | 2.50 | | |
| Rated torque [kgfm] | | 0.414 | | |
| Locked rotor torque [%] | | 220 | | |
| Breakdown torque [%] | | 330 | | |
| Service factor | | 1.15 | | |
| Temperature rise | | 80 K | | |
| Locked rotor time | | 25s (cold) 14s (hot) | | |
| Noise level ² | | 62.0 dB(A) | | |
| Efficiency (%) | 25% | | | |
| | 50% | 84.0 | | |
| | 75% | 85.5 | | |
| | 100% | 85.5 | | |
| Power Factor | 25% | | | |
| | 50% | 0.77 | | |
| | 75% | 0.86 | | |
| | 100% | 0.91 | | |
| Bearing type | : <u>Drive end</u> 6204 ZZ <u>Non drive end</u> 6202 ZZ | Foundation loads | | |
| Sealing | : Without Without Bearing Seal Bearing Seal | Max. traction : 35 kgf Max. compression : 52 kgf | | |
| Lubrication interval | : - - | | | |
| Lubricant amount | : - - | | | |
| Lubricant type | : Mobil Polyrex EM | | | |
| Notes | | | | |
| This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load. | | These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1. | | |
| Rev. | Changes Summary | Performed | Checked | Date |
| Performed by | | | | |
| Checked by | | | Page | Revision |
| Date | 11/05/2022 | | 1 / 2 | |

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Three-Phase

Product code : 13997238

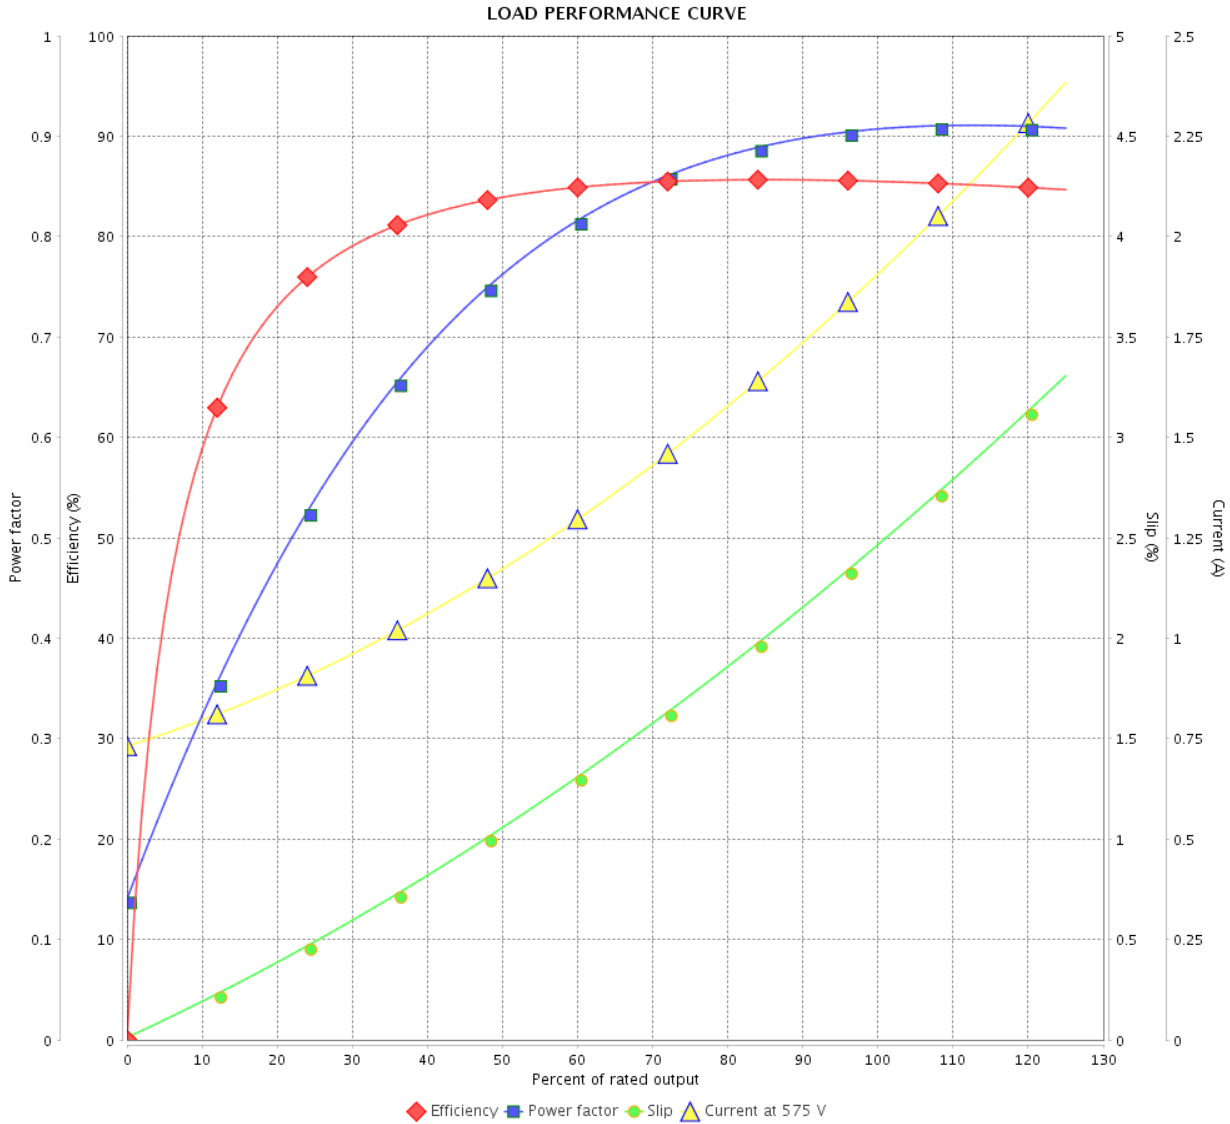

Performance : 575 V 60 Hz 2P

Rated current : 1.94 A
 LRC : 8.9
 Rated torque : 0.414 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 330 %
 Rated speed : 3510 rpm

Moment of inertia (J) : 0.0049 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | Page 2 / 2 | Revision |
| Checked by | | | | |
| Date | 11/05/2022 | | | |