

DATA SHEET


Single Phase Induction Motor - Squirrel Cage



| | | | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------|---------|----------|
| Customer : | | | | |
| Product line | : Jet Pump - J type Single-Phase | | | |
| Product code : | 14069225 | | | |
| Frame | : 56J | | | |
| Insulation class | : F | | | |
| Duty cycle | : Cont.(S1) | | | |
| Ambient temperature | : -20°C to +40°C | | | |
| Altitude | : 1000 m.a.s.l. | | | |
| Protection degree | : IP55 | | | |
| Design | : L | | | |
| Cooling method | : IC411 - TEFC | | | |
| Mounting | : F-1 | | | |
| Rotation ¹ | : CCW | | | |
| Starting method | : Direct On Line | | | |
| Approx. weight ³ | : 15.3 kg | | | |
| Moment of inertia (J) | : 0.0044 kgm ² | | | |
| Output [HP] | 1 | | | |
| Poles | 4 | | | |
| Frequency [Hz] | 60 | | | |
| Rated voltage [V] | 115/208-230 | | | |
| Rated current [A] | 13.6/7.52-6.80 | | | |
| L. R. Amperes [A] | 91.1/50.4-45.6 | | | |
| LRC [A] | 6.7x(Code M) | | | |
| No load current [A] | 9.60/4.14-4.80 | | | |
| Rated speed [RPM] | 1745 | | | |
| Slip [%] | 3.06 | | | |
| Rated torque [kgfm] | 0.416 | | | |
| Locked rotor torque [%] | 280 | | | |
| Breakdown torque [%] | 270 | | | |
| Service factor | | | | |
| Temperature rise | 80 K | | | |
| Locked rotor time | 14s (cold) 8s (hot) | | | |
| Noise level ² | 54.0 dB(A) | | | |
| Efficiency (%) | 25% | | | |
| | 50% | 62.0 | | |
| | 75% | 68.0 | | |
| | 100% | 71.0 | | |
| Power Factor | 25% | | | |
| | 50% | 0.48 | | |
| | 75% | 0.60 | | |
| | 100% | 0.68 | | |
| Bearing type | : <u>Drive end</u> 6203 2RS <u>Non drive end</u> 6202 2RS | | | |
| Sealing | : V'Ring V'Ring | | | |
| Lubrication interval | : - - | | | |
| Lubricant amount | : - - | | | |
| Lubricant type | : Mobil Polyrex EM | | | |
| Foundation loads | Max. traction : 28 kgf | | | |
| | Max. compression : 43 kgf | | | |
| Notes | | | | |
| This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load. | | | | |
| These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1. | | | | |
| Rev. | Changes Summary | Performed | Checked | Date |
| Performed by | | | | |
| Checked by | | | Page | Revision |
| Date | 11/05/2022 | | 1 / 2 | |


LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Single-Phase Product code : 14069225

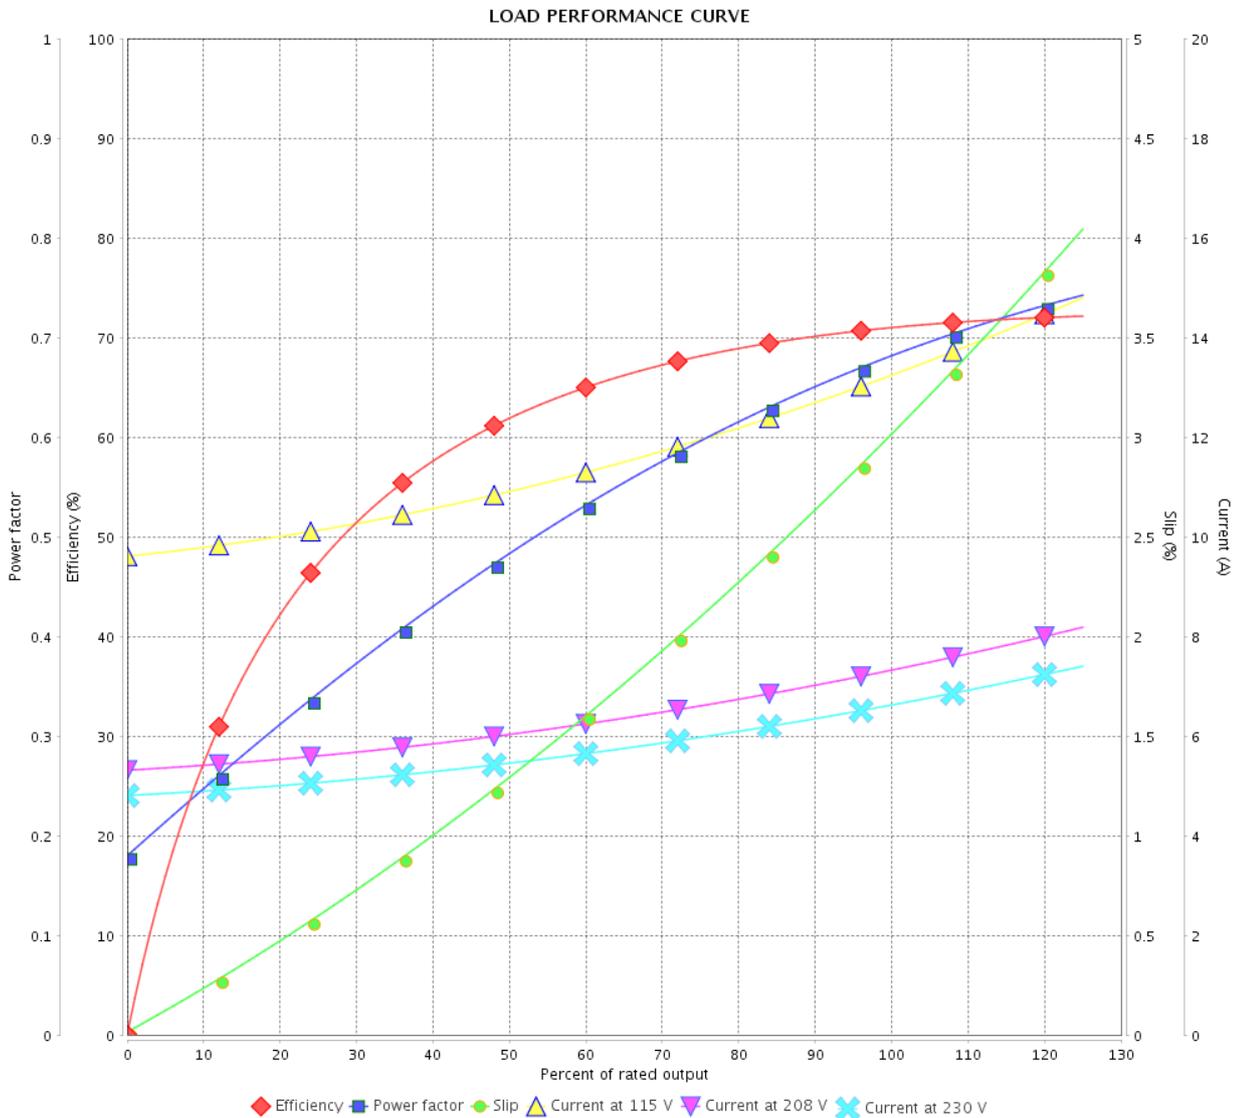

Performance : 115/208-230 V 60 Hz 4P

Rated current : 13.6/7.52-6.80 A
 LRC : 6.7
 Rated torque : 0.416 kgfm
 Locked rotor torque : 280 %
 Breakdown torque : 270 %
 Rated speed : 1745 rpm

Moment of inertia (J) : 0.0044 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : L

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | Page 2 / 2 | Revision |
| Checked by | | | | |
| Date | 11/05/2022 | | | |