

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	12628876
Frame	: 143/5T	Cooling method	: IC01 - ODP
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 18.2 kg
Design	: B	Moment of inertia (J)	: 0.0049 kgm <sup>2</sup>
Output [HP]	2	2	2
Poles	4	4	4
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190/380	220/415
Rated current [A]	5.38/2.69	6.52/3.26	5.90/3.13
L. R. Amperes [A]	41.4/20.7	36.5/18.3	36.6/19.4
LRC [A]	7.7x(Code K)	5.6x(Code G)	6.2x(Code H)
No load current [A]	2.75/1.38	2.70/1.35	2.82/1.49
Rated speed [RPM]	1740	1410	1420
Slip [%]	3.33	6.00	5.33
Rated torque [kgfm]	0.834	1.03	1.02
Locked rotor torque [%]	260	200	220
Breakdown torque [%]	320	229	260
Service factor		1.00	1.00
Temperature rise	80 K	105 K	80 K
Locked rotor time	30s (cold) 17s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)
Noise level <sup>2</sup>	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)
Efficiency (%)	25%	85.2	86.4
	50%	85.5	85.2
	75%	86.5	85.2
	100%	86.5	83.4
Power Factor	25%	0.36	0.38
	50%	0.61	0.64
	75%	0.74	0.77
	100%	0.81	0.83
Bearing type	: Drive end 6205 ZZ Non drive end 6203 ZZ	Foundation loads	
Sealing	: Without Bearing Seal Without Bearing Seal	Max. traction	: 66 kgf
Lubrication interval	: -	Max. compression	: 85 kgf
Lubricant amount	: -		
Lubricant type	: Mobil Polyrex EM		
Notes			
USABLE @208V 5.95A SF 1.00 SFA 5.95A			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary	Performed	Checked
Performed by			
Checked by			
Date	13/05/2022		
		Page	Revision
		1 / 4	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12628876

LOAD PERFORMANCE CURVE

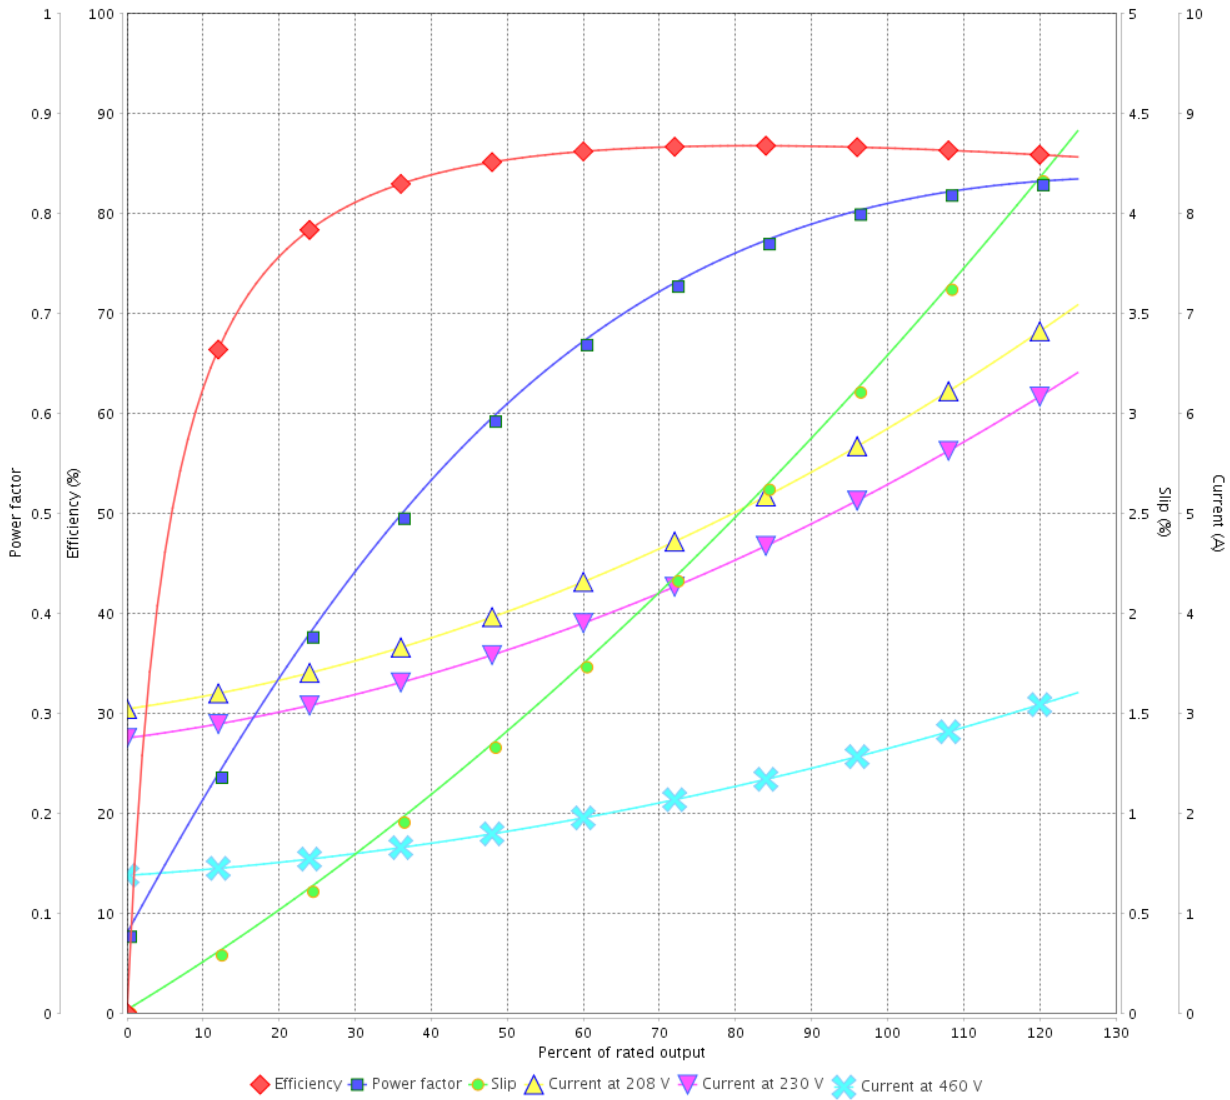

Performance : 230/460 V 60 Hz 4P

Rated current : 5.38/2.69 A  
 LRC : 7.7  
 Rated torque : 0.834 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 320 %  
 Rated speed : 1740 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12628876

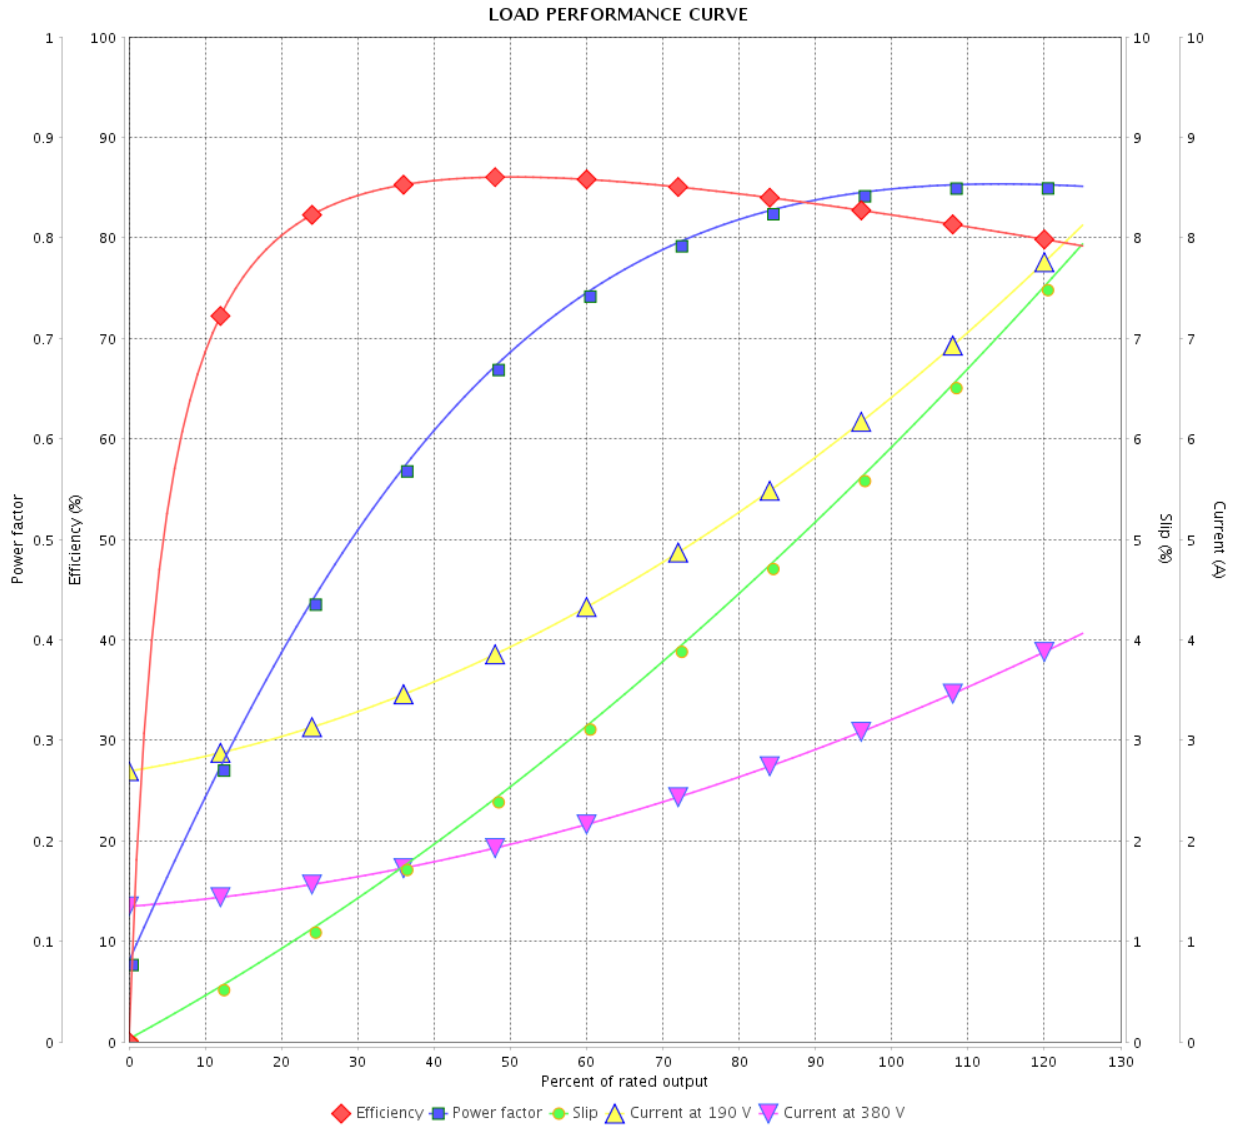

Performance : 190/380 V 50 Hz 4P

Rated current : 6.52/3.26 A  
 LRC : 5.6  
 Rated torque : 1.03 kgfm  
 Locked rotor torque : 200 %  
 Breakdown torque : 229 %  
 Rated speed : 1410 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12628876

LOAD PERFORMANCE CURVE

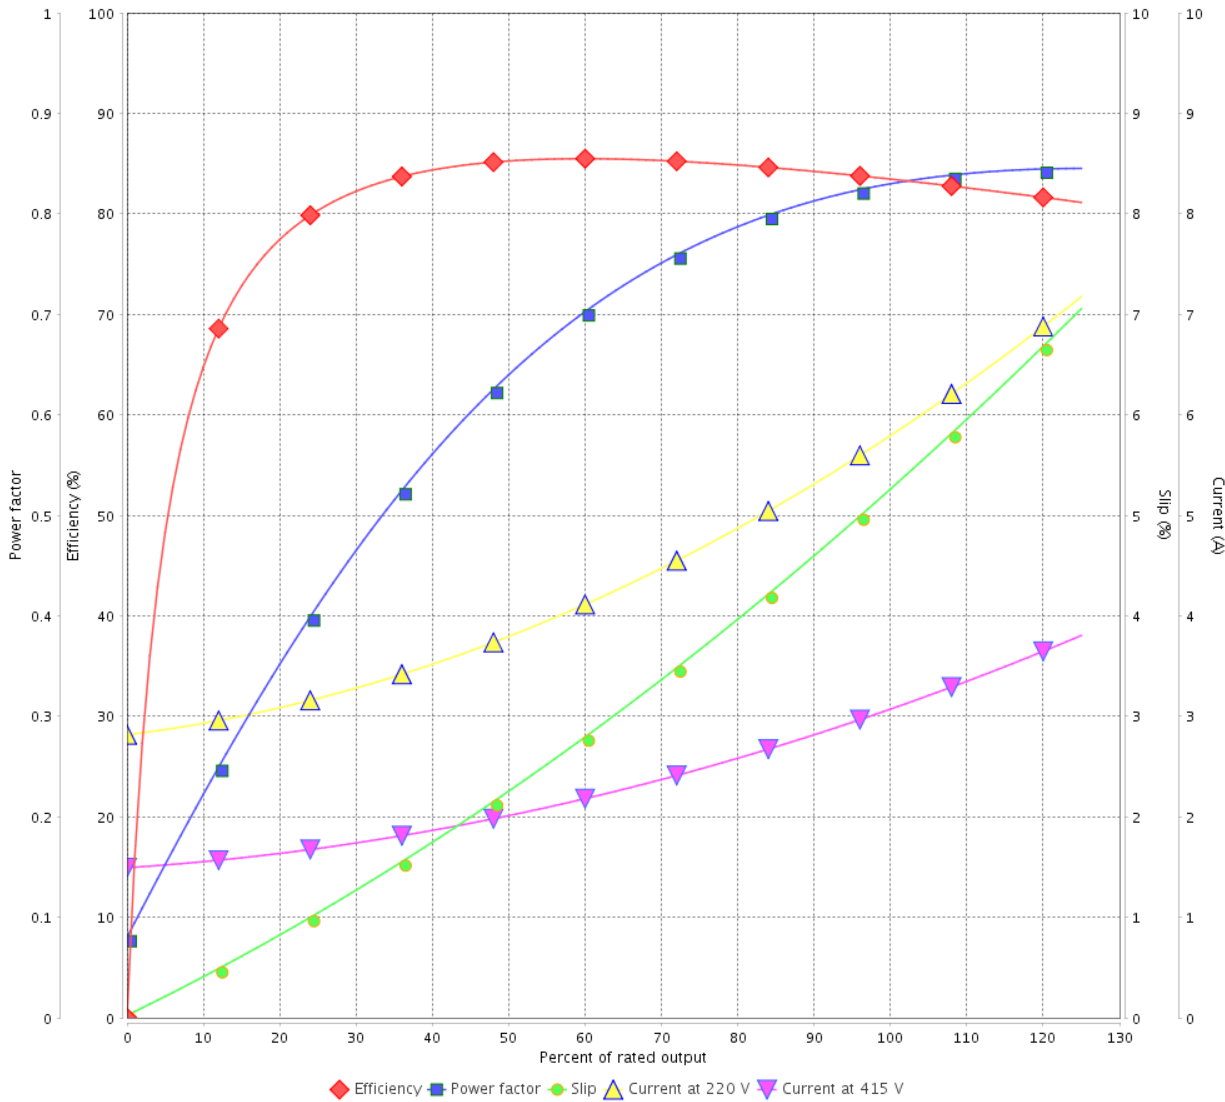

Performance : 220/415 V 50 Hz 4P

Rated current : 5.90/3.13 A  
 LRC : 6.2  
 Rated torque : 1.02 kgfm  
 Locked rotor torque : 220 %  
 Breakdown torque : 260 %  
 Rated speed : 1420 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				