

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:			
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	12674849	
Frame	: 213/5T	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>2</sup>	: 53.1 kg	
Design	: B	Moment of inertia (J)	: 0.0433 kgm <sup>2</sup>	
Output [HP]	7.5	7.5	7.5	
Poles	4	4	4	
Frequency [Hz]	60	50	50	
Rated voltage [V]	230/460	190/380	220/415	
Rated current [A]	18.5/9.25	22.2/11.1	20.0/10.6	
L. R. Amperes [A]	133/66.6	129/64.4	130/68.9	
LRC [A]	7.2x(Code H)	5.8x(Code G)	6.5x(Code H)	
No load current [A]	8.79/4.39	8.64/4.32	8.88/4.71	
Rated speed [RPM]	1770	1455	1460	
Slip [%]	1.67	3.00	2.67	
Rated torque [kgfm]	3.08	3.74	3.73	
Locked rotor torque [%]	240	170	190	
Breakdown torque [%]	320	229	250	
Service factor	1.15	1.15	1.15	
Temperature rise	80 K	80 K	80 K	
Locked rotor time	23s (cold) 13s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)	
Noise level <sup>2</sup>	59.0 dB(A)	56.0 dB(A)	56.0 dB(A)	
Efficiency (%)	25%	88.6	90.4	89.6
	50%	89.5	88.9	88.6
	75%	90.2	88.5	88.7
	100%	91.0	86.7	87.4
Power Factor	25%	0.39	0.46	0.42
	50%	0.65	0.73	0.69
	75%	0.77	0.83	0.80
	100%	0.82	0.87	0.86
Bearing type	: Drive end 6208 ZZ Non drive end 6206 ZZ	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction	: 146 kgf	
Lubrication interval	: - -	Max. compression	: 199 kgf	
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
USABLE @208V 20.5A SF 1.00 SFA 20.5A				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/05/2022		1 / 4	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12674849

LOAD PERFORMANCE CURVE

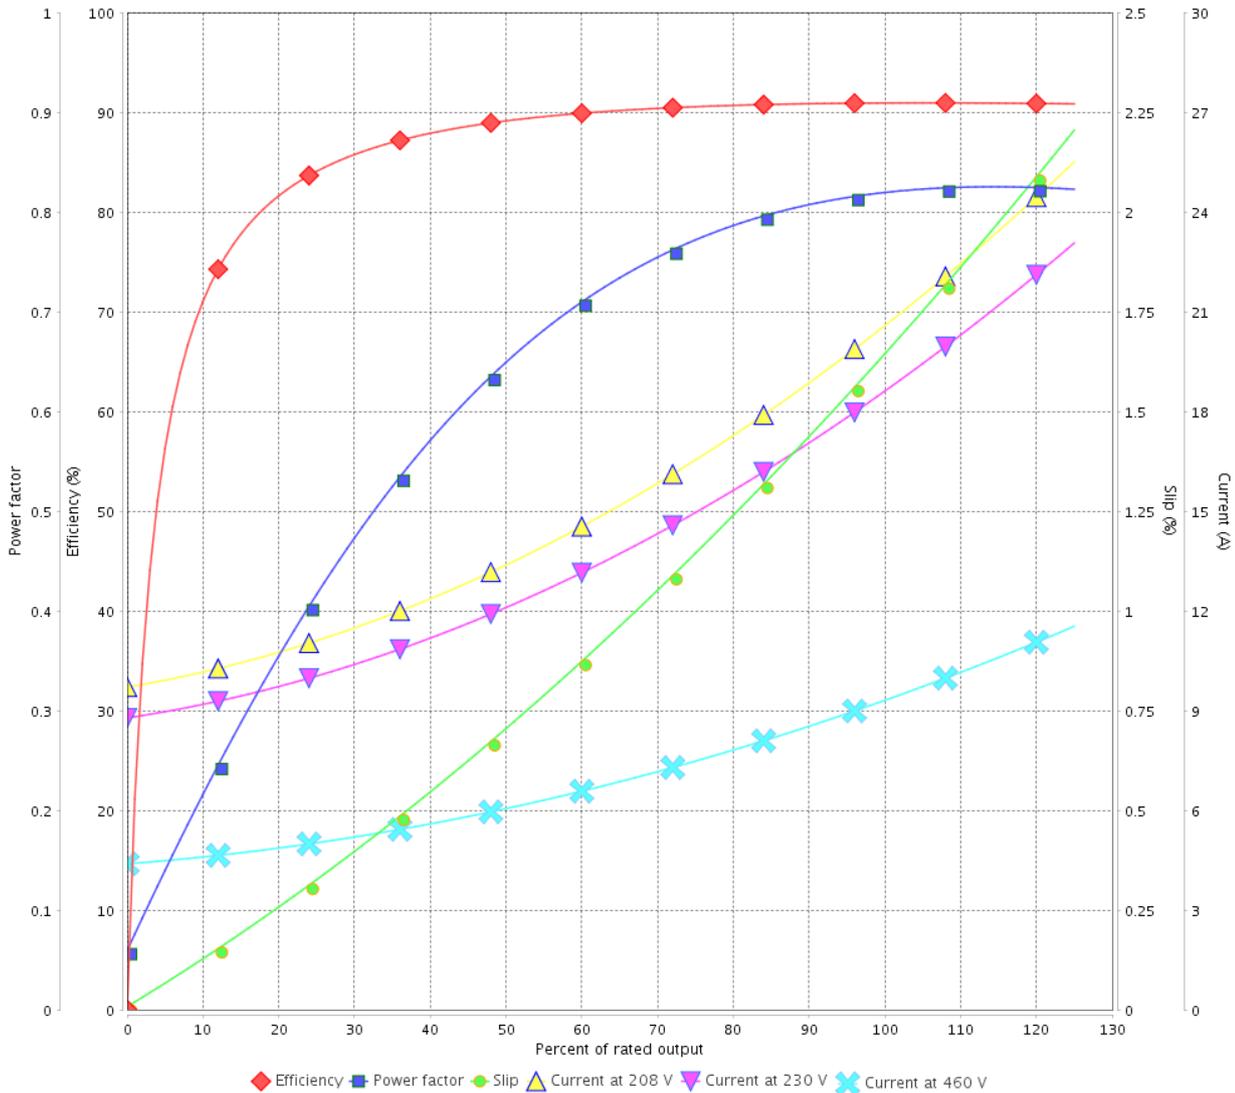

Performance : 230/460 V 60 Hz 4P

Rated current : 18.5/9.25 A  
 LRC : 7.2  
 Rated torque : 3.08 kgfm  
 Locked rotor torque : 240 %  
 Breakdown torque : 320 %  
 Rated speed : 1770 rpm

Moment of inertia (J) : 0.0433 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 4	Revision
Checked by				
Date	13/05/2022			


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12674849

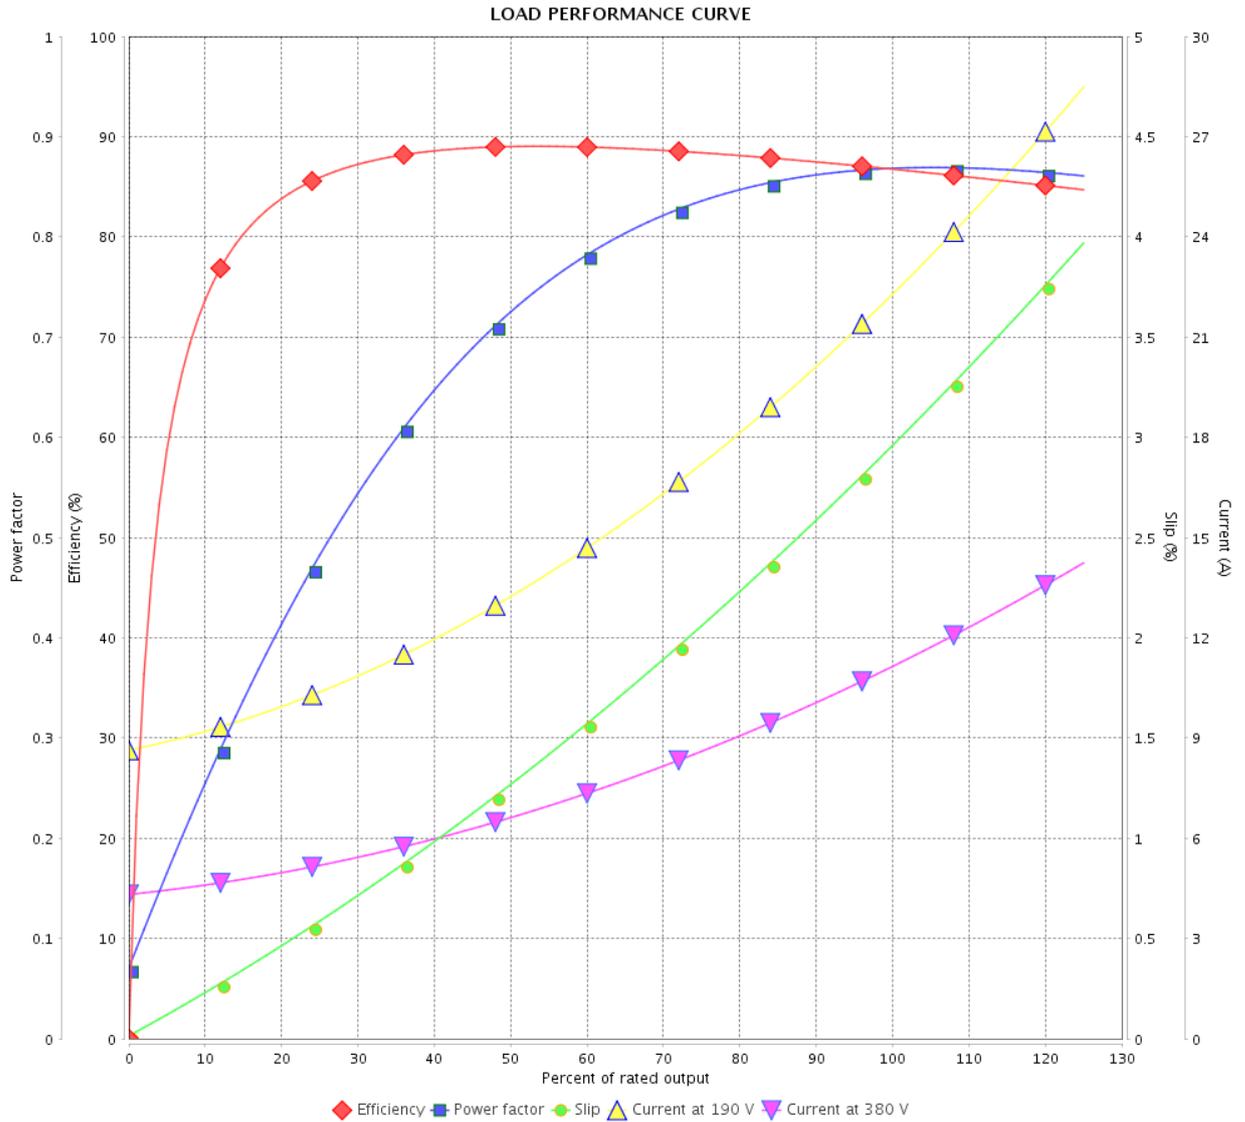

Performance : 190/380 V 50 Hz 4P

Rated current : 22.2/11.1 A  
 LRC : 5.8  
 Rated torque : 3.74 kgfm  
 Locked rotor torque : 170 %  
 Breakdown torque : 229 %  
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0433 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12674849

LOAD PERFORMANCE CURVE

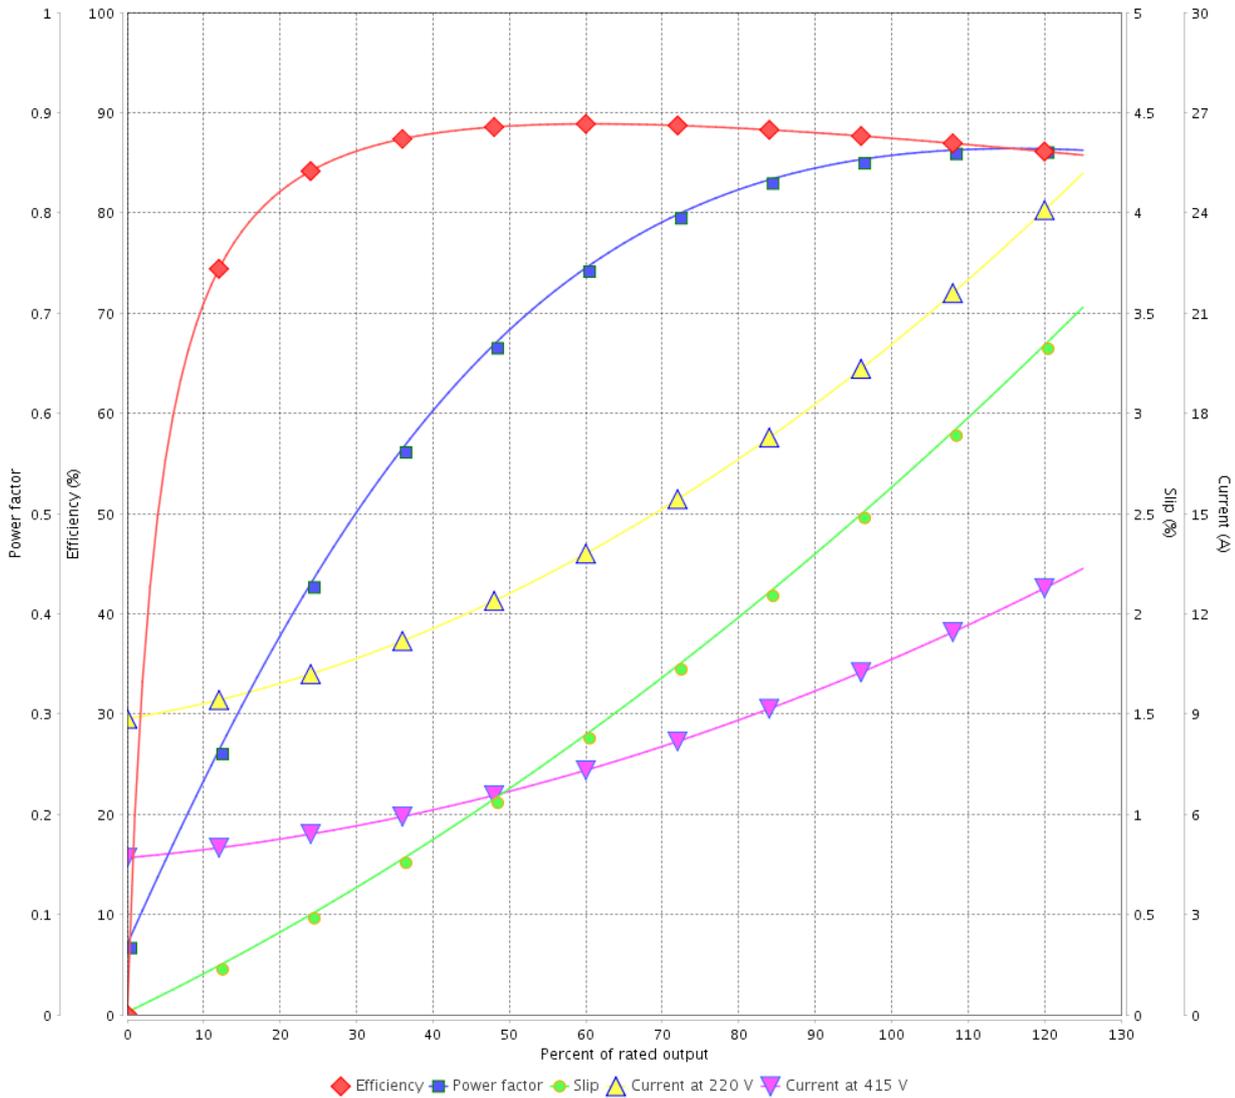

Performance : 220/415 V 50 Hz 4P

Rated current : 20.0/10.6 A  
 LRC : 6.5  
 Rated torque : 3.73 kgfm  
 Locked rotor torque : 190 %  
 Breakdown torque : 250 %  
 Rated speed : 1460 rpm

Moment of inertia (J) : 0.0433 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	13/05/2022			