

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Standard Efficiency Three-Phase Product code : 12894832

Frame	: 56C	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 10.7 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0027 kgm ²

Output [HP]	0.75	0.75	0.75
Poles	4	4	4
Frequency [Hz]	60	50	50
Rated voltage [V]	208-230/460	190/380	220/415
Rated current [A]	2.70-2.44/1.22	2.74/1.37	2.58/1.37
L. R. Amperes [A]	18.6-16.8/8.42	15.3/7.67	15.5/8.22
LRC [A]	6.9x(Code K)	5.6x(Code H)	6.0x(Code J)
No load current [A]	1.55-1.80/0.900	1.71/0.856	1.86/0.985
Rated speed [RPM]	1755	1440	1445
Slip [%]	2.50	4.00	3.67
Rated torque [kgfm]	0.310	0.378	0.377
Locked rotor torque [%]	240	170	200
Breakdown torque [%]	300	229	260
Service factor		1.15	1.15
Temperature rise	80 K	80 K	80 K
Locked rotor time	30s (cold) 17s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)
Noise level ²	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)
Efficiency (%)	25%	70.4	72.6
	50%	72.0	73.1
	75%	77.0	76.5
	100%	78.5	76.5
Power Factor	25%	0.26	0.33
	50%	0.48	0.58
	75%	0.61	0.72
	100%	0.72	0.80

Bearing type	: Drive end	Non drive end	Foundation loads
	: 6203 ZZ	6202 ZZ	
Sealing	: V'Ring	Without	Max. traction : 26 kgf
		Bearing Seal	
Lubrication interval	: -	-	Max. compression : 36 kgf
Lubricant amount	: -	-	
Lubricant type	: Mobil Polyrex EM		

Notes

USABLE @208V SF 1.00

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 4		
Checked by				
Date	13/05/2022			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 12894832

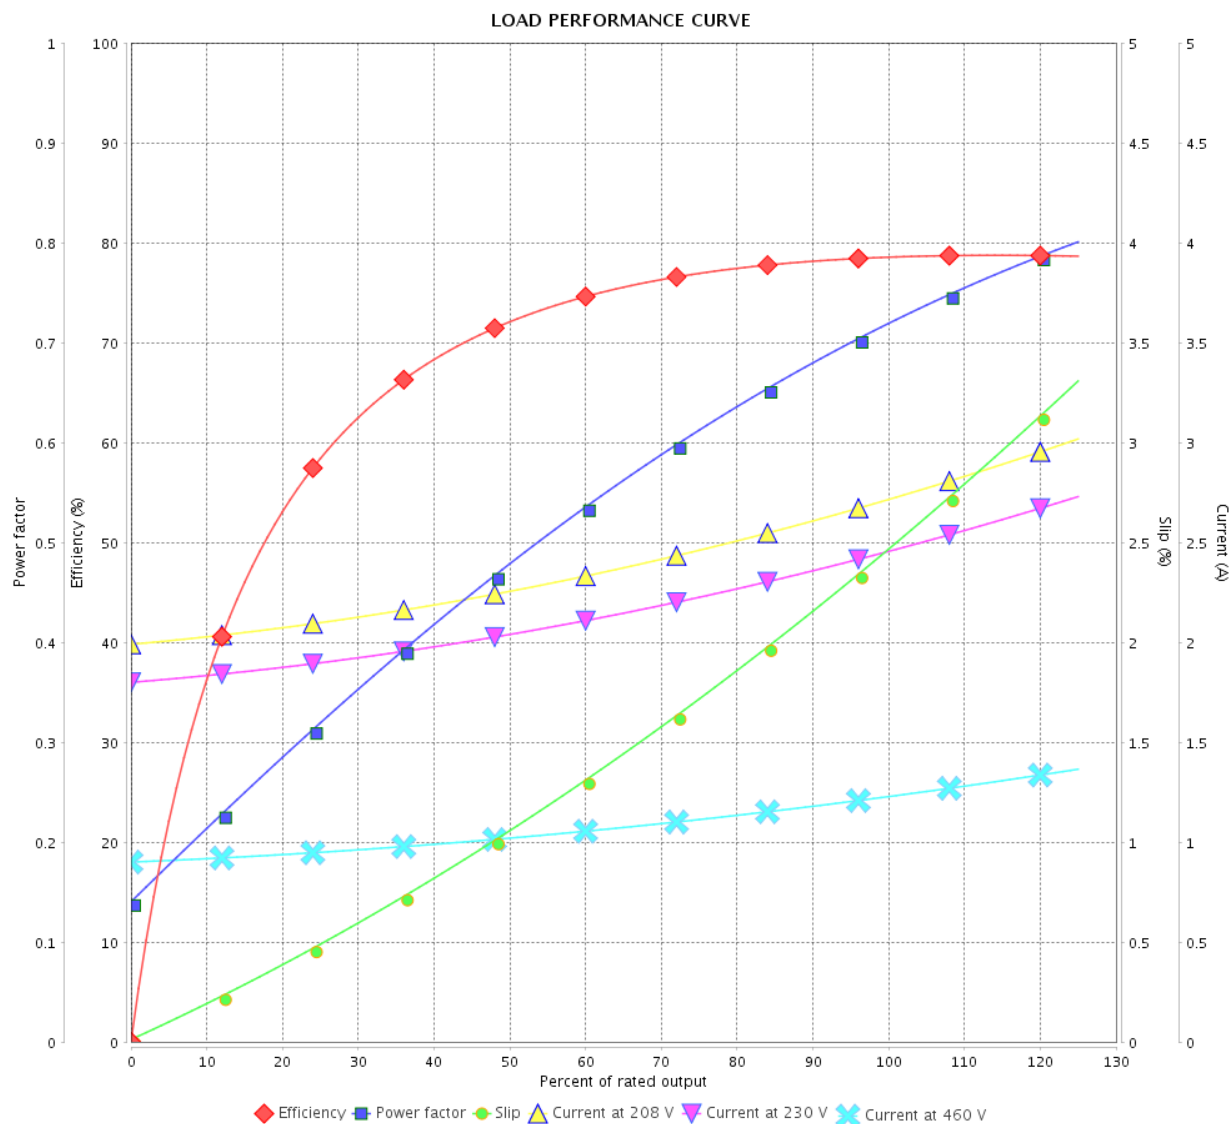

Performance : 208-230/460 V 60 Hz 4P

Rated current : 2.70-2.44/1.22 A
 LRC : 6.9
 Rated torque : 0.310 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 300 %
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0027 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 4	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase

Product code : 12894832

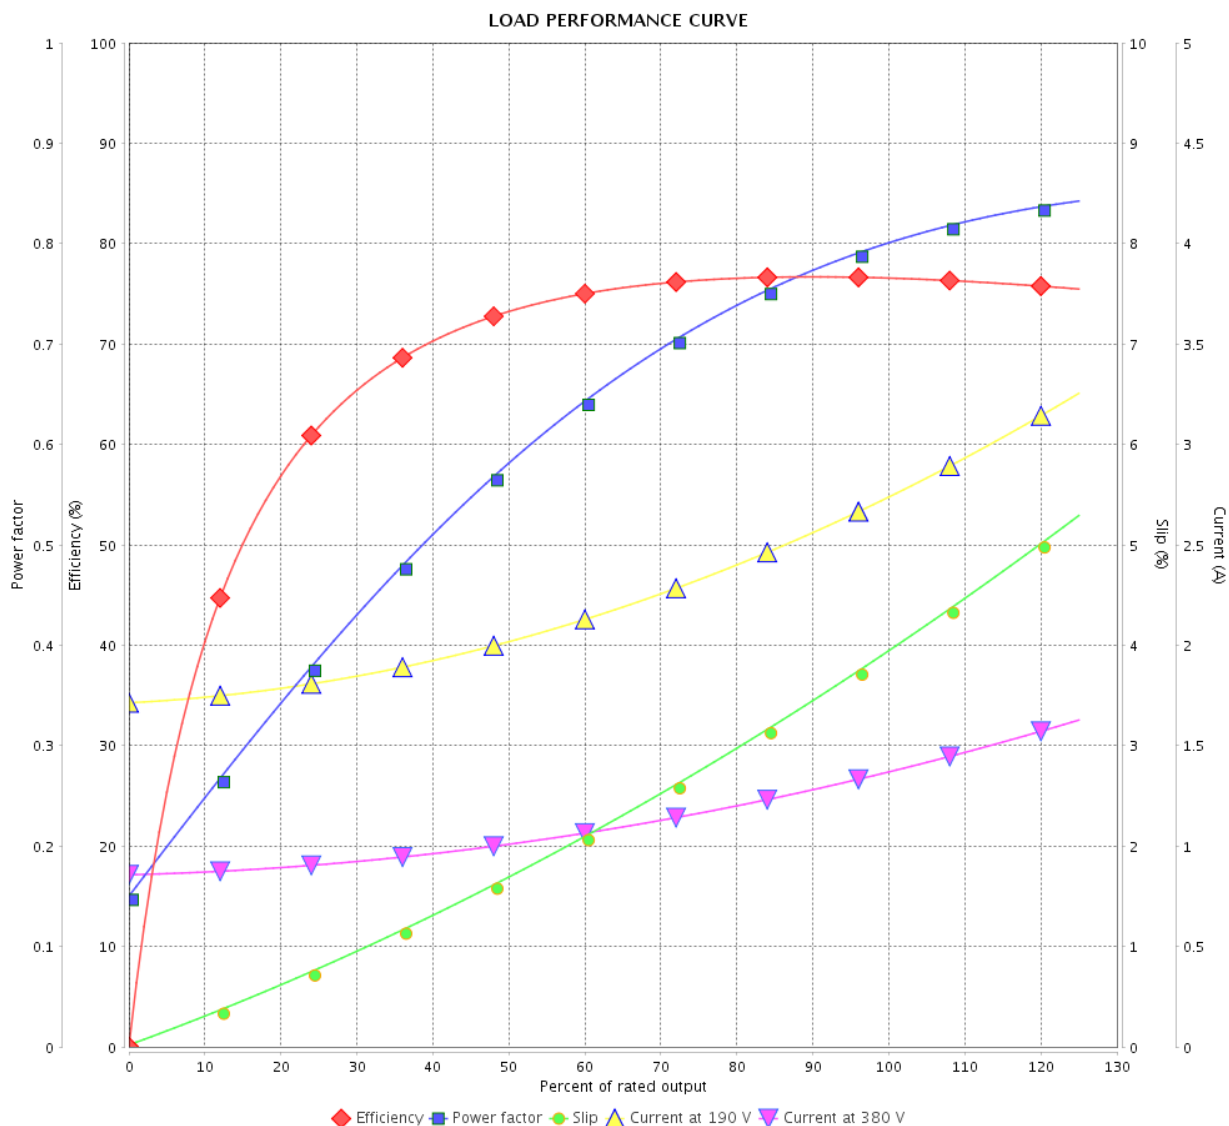

Performance : 190/380 V 50 Hz 4P

Rated current : 2.74/1.37 A
 LRC : 5.6
 Rated torque : 0.378 kgfm
 Locked rotor torque : 170 %
 Breakdown torque : 229 %
 Rated speed : 1440 rpm

Moment of inertia (J) : 0.0027 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 4Revision		
Checked by				
Date	13/05/2022			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 12894832

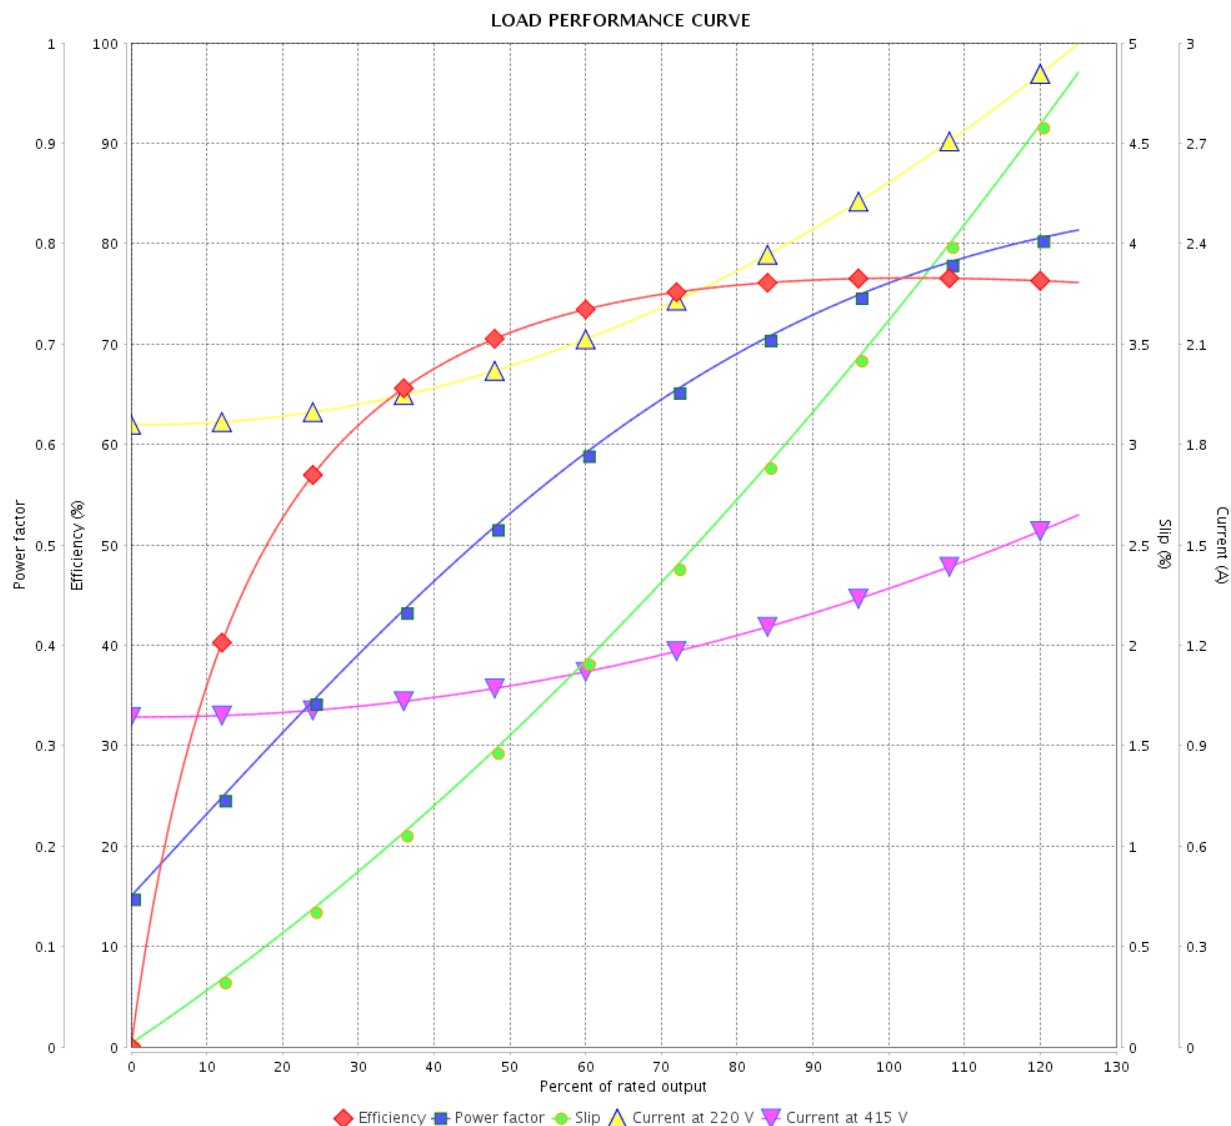

Performance : 220/415 V 50 Hz 4P

Rated current : 2.58/1.37 A
 LRC : 6.0
 Rated torque : 0.377 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 260 %
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.0027 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 4	
Date					