

# DATA SHEET

## Single Phase Induction Motor - Squirrel Cage



Customer	:			
Product line	: Single-Phase	Product code : 13505067		
Frame	: W56C	Cooling method : IC01 - ODP		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup> : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>2</sup> : 9.4 kg		
Design	: N	Moment of inertia (J) : 0.0010 kgm <sup>2</sup>		
Output [HP]		0.5		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		115/208-230		
Rated current [A]		6.68/3.69-3.34		
L. R. Amperes [A]		54.8/30.3-27.4		
LRC [A]		8.2x(Code M)		
No load current [A]		4.60/1.98-2.30		
Rated speed [RPM]		3500		
Slip [%]		2.78		
Rated torque [kgfm]		0.104		
Locked rotor torque [%]		280		
Breakdown torque [%]		300		
Service factor				
Temperature rise		80 K		
Locked rotor time		10s (cold) 6s (hot)		
Noise level <sup>2</sup>		56.0 dB(A)		
Efficiency (%)	25%			
	50%	54.0		
	75%	61.0		
	100%	65.0		
Power Factor	25%			
	50%	0.55		
	75%	0.66		
	100%	0.74		
Bearing type	: <u>Drive end</u> 6203 ZZ <u>Non drive end</u> 6202 ZZ	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction : 5 kgf Max. compression : 14 kgf		
Lubrication interval	: - -			
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

# LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer :

Product line : Single-Phase

Product code : 13505067

LOAD PERFORMANCE CURVE

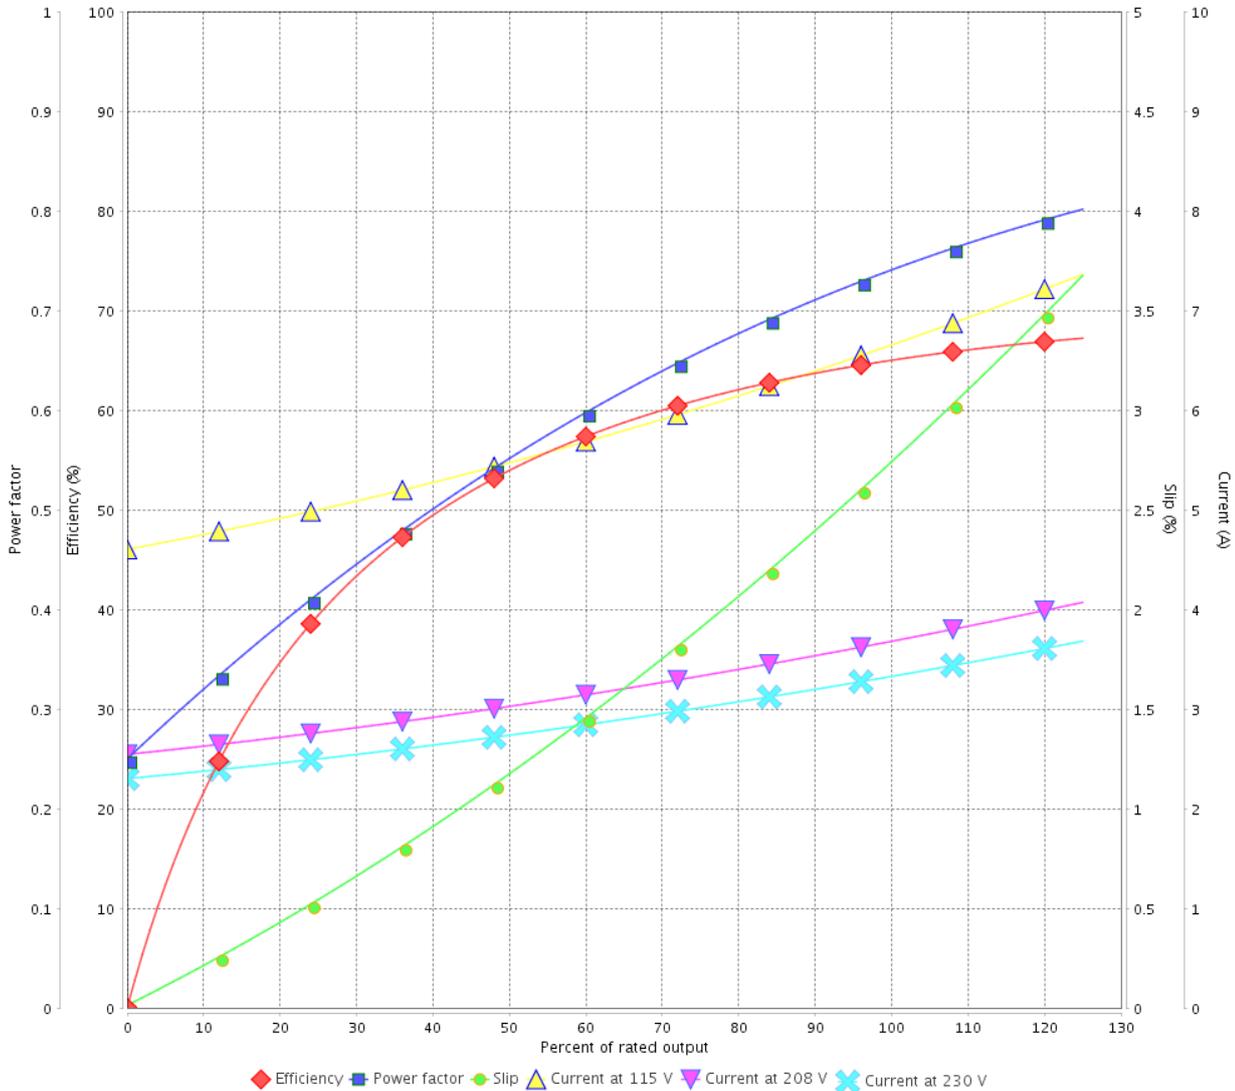

Performance : 115/208-230 V 60 Hz 2P

Rated current : 6.68/3.69-3.34 A  
 LRC : 8.2  
 Rated torque : 0.104 kgfm  
 Locked rotor torque : 280 %  
 Breakdown torque : 300 %  
 Rated speed : 3500 rpm

Moment of inertia (J) : 0.0010 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/05/2022			