

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line : Three-Phase		Product code : 13737454			
Frame : 56	Insulation class : F	Duty cycle : Cont.(S1)	Ambient temperature : -20°C to +40°C	Altitude : 1000 m.a.s.l.	
Design : A	Cooling method : IC01 - ODP	Mounting : F-1	Rotation ¹ : Both (CW and CCW)	Starting method : Direct On Line	
	Approx. weight ² : 12.3 kg	Moment of inertia (J) : 0.0036 kgm ²			
Output [HP]	1	1	1		
Poles	4	4	4		
Frequency [Hz]	60	50	50		
Rated voltage [V]	230/460	190/380	220/415		
Rated current [A]	3.14/1.57	3.54/1.77	3.34/1.77		
L. R. Amperes [A]	23.9/11.9	20.9/10.4	22.0/11.7		
LRC [A]	7.6x(Code L)	5.9x(Code H)	6.6x(Code K)		
No load current [A]	2.20/1.10	2.09/1.05	2.42/1.28		
Rated speed [RPM]	1760	1440	1450		
Slip [%]	2.22	4.00	3.33		
Rated torque [kgfm]	0.412	0.504	0.501		
Locked rotor torque [%]	280	180	229		
Breakdown torque [%]	320	250	300		
Service factor		1.15	1.15		
Temperature rise	80 K	80 K	80 K		
Locked rotor time	30s (cold) 17s (hot)	32s (cold) 18s (hot)	27s (cold) 15s (hot)		
Noise level ²	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)		
Efficiency (%)	25%				
	50%	78.5	79.6	76.1	
	75%	82.5	81.4	79.9	
	100%	83.5	80.6	80.6	
Power Factor	25%				
	50%	0.49	0.58	0.49	
	75%	0.63	0.72	0.64	
	100%	0.72	0.80	0.73	
Bearing type	: Drive end 6204 ZZ	: Non drive end 6202 ZZ	Foundation loads		
Sealing	: Without	: Without	Max. traction	: 42 kgf	
	: Bearing Seal	: Bearing Seal	Max. compression	: 54 kgf	
Lubrication interval	: -	: -			
Lubricant amount	: -	: -			
Lubricant type	: Mobil Polyrex EM				
Notes USABLE @208V 3.47A SF 1.00 SFA 3.47A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	17/05/2022			1 / 4	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Three-Phase

Product code : 13737454

LOAD PERFORMANCE CURVE

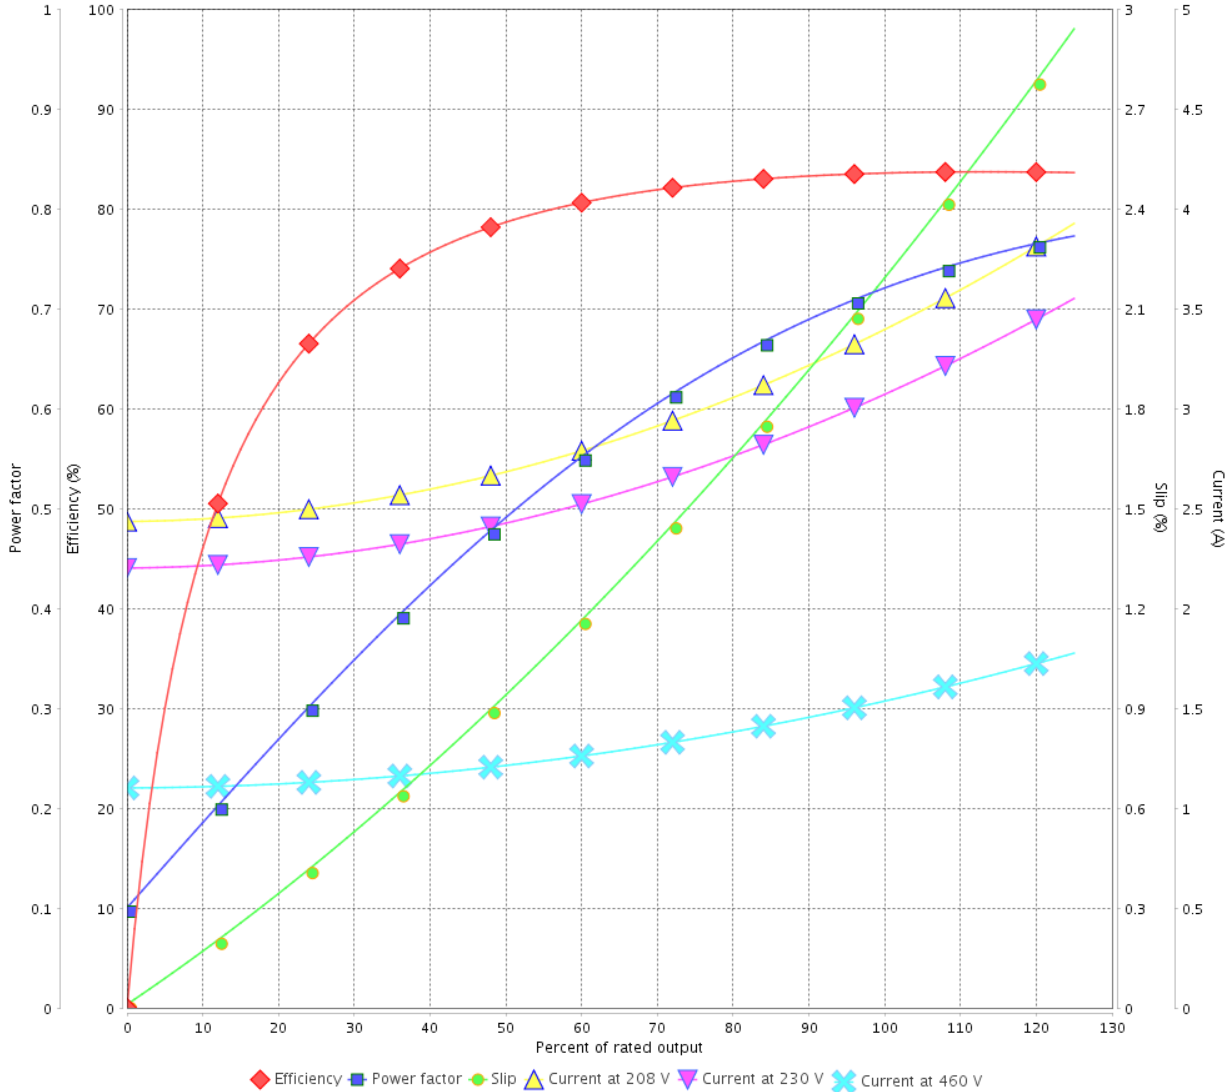

Performance : 230/460 V 60 Hz 4P

Rated current : 3.14/1.57 A
 LRC : 7.6
 Rated torque : 0.412 kgfm
 Locked rotor torque : 280 %
 Breakdown torque : 320 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.0036 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 4	Revision
Checked by				
Date	17/05/2022			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Three-Phase

Product code : 13737454

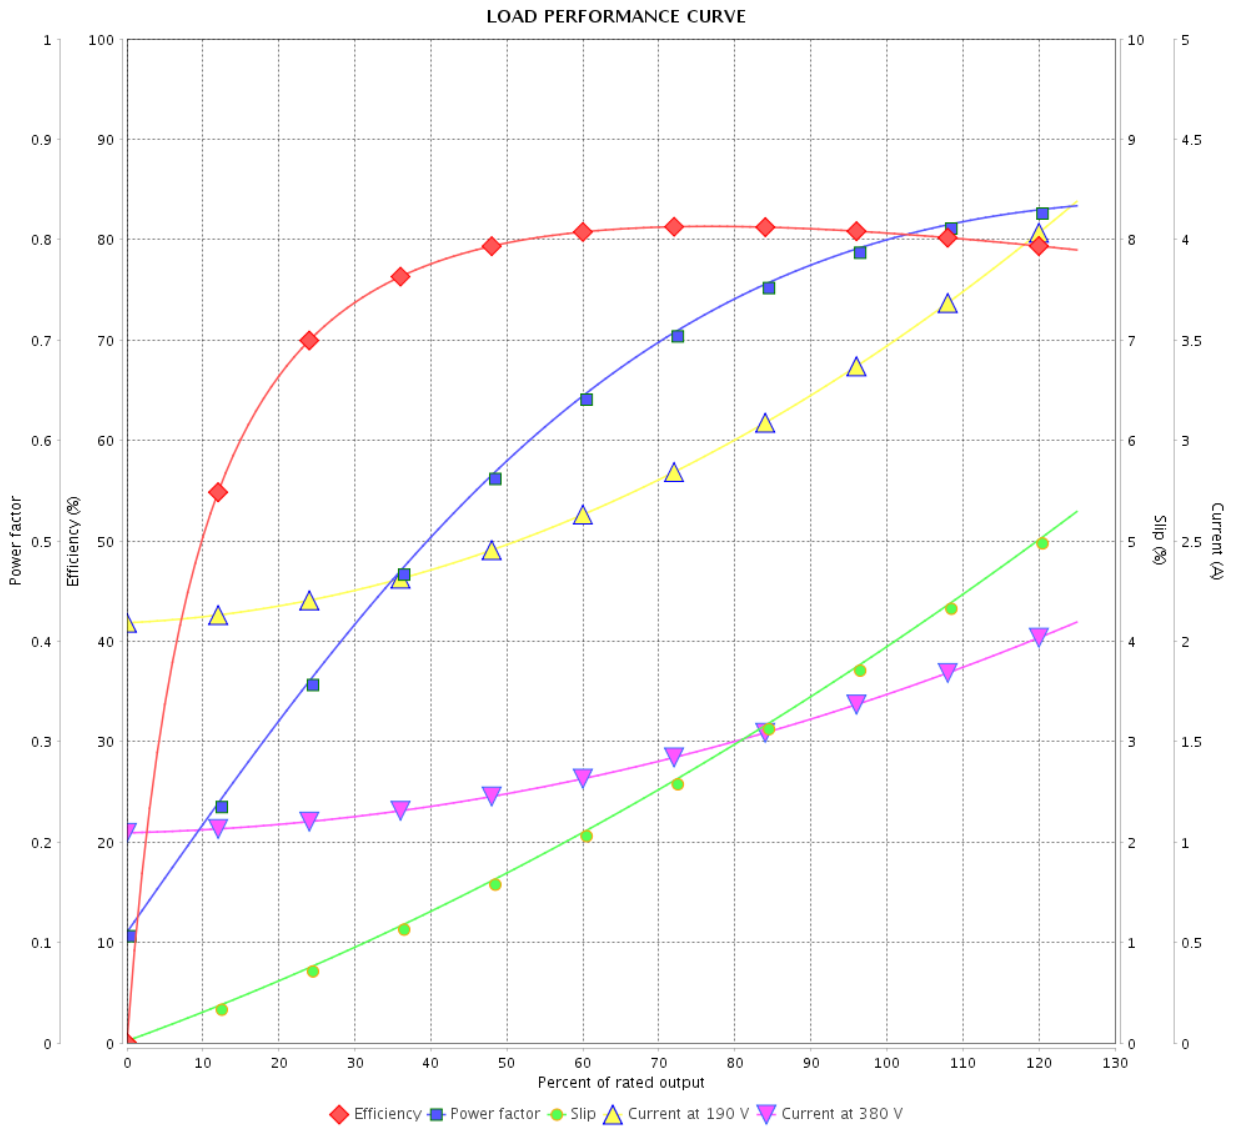

Performance : 190/380 V 50 Hz 4P

Rated current : 3.54/1.77 A
 LRC : 5.9
 Rated torque : 0.504 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 250 %
 Rated speed : 1440 rpm

Moment of inertia (J) : 0.0036 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Three-Phase

Product code : 13737454

LOAD PERFORMANCE CURVE

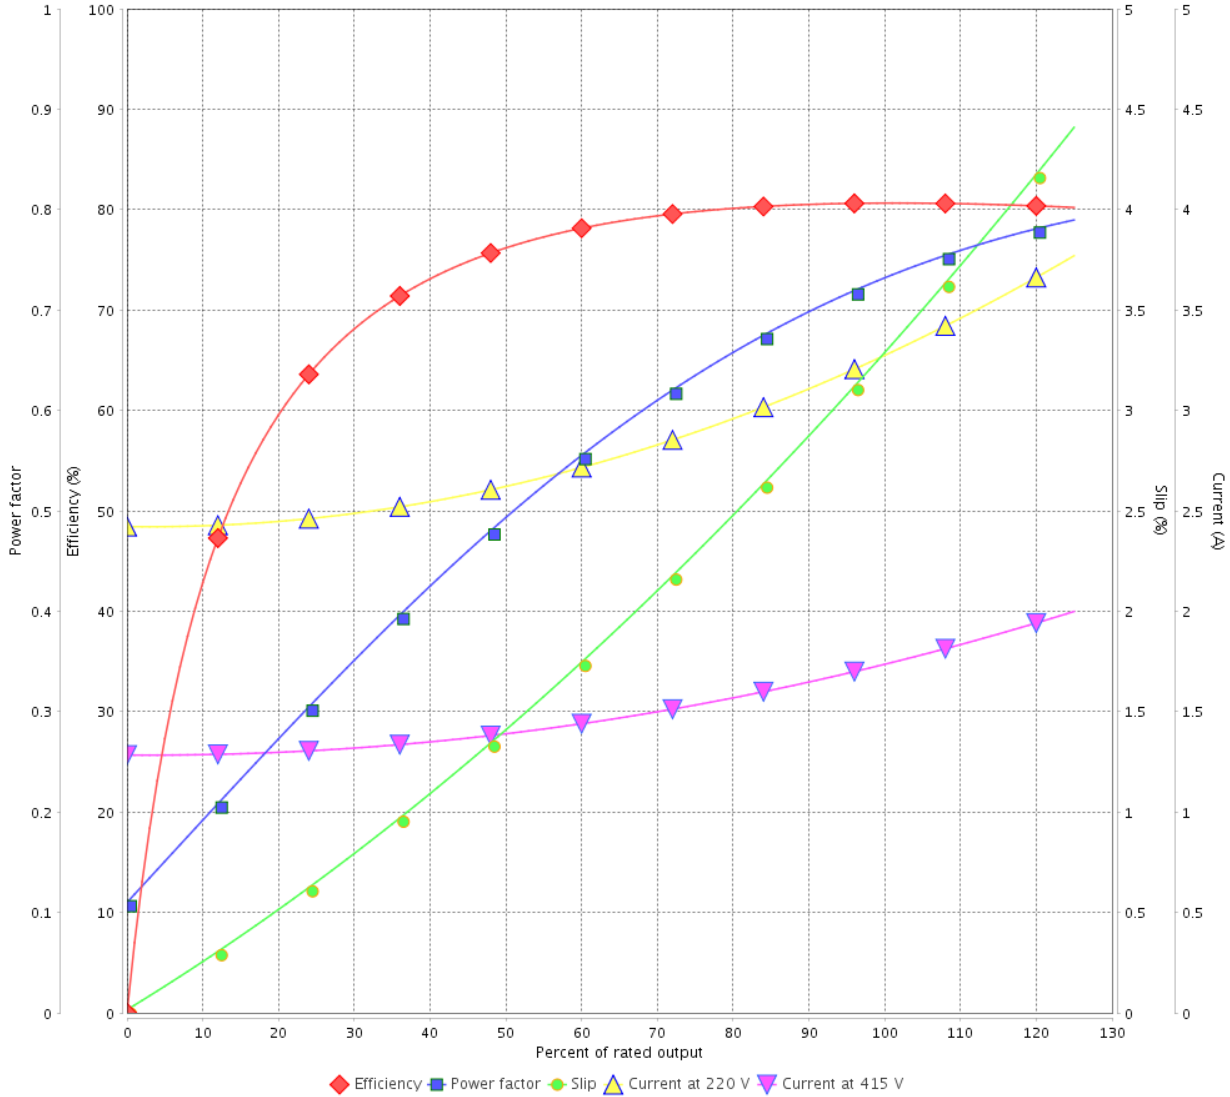

Performance : 220/415 V 50 Hz 4P

Rated current : 3.34/1.77 A
 LRC : 6.6
 Rated torque : 0.501 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 300 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0036 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	17/05/2022			