

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer					
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	12795529		
Frame	: 182/4T	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 31.1 kg		
Design	: B	Moment of inertia (J)	: 0.0118 kgm ²		
Output [HP]	2				
Poles	6				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	2.36				
L. R. Amperes [A]	15.6				
LRC [A]	6.6x(Code J)				
No load current [A]	1.37				
Rated speed [RPM]	1165				
Slip [%]	2.92				
Rated torque [kgfm]	1.25				
Locked rotor torque [%]	200				
Breakdown torque [%]	300				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	59s (cold) 33s (hot)				
Noise level ²	52.0 dB(A)				
Efficiency (%)	25%	84.4			
	50%	85.5			
	75%	86.5			
	100%	87.5			
Power Factor	25%	0.30			
	50%	0.53			
	75%	0.66			
	100%	0.73			
Bearing type	: Drive end	Non drive end	Foundation loads		
Sealing	: 6206 ZZ	6205 ZZ	Max. traction	: 62 kgf	
Lubrication interval	: Without	Without	Max. compression	: 94 kgf	
Lubricant amount	: Bearing Seal	Bearing Seal			
Lubricant type	: -	-			
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	17/05/2022			Page	Revision
				1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 12795529

LOAD PERFORMANCE CURVE

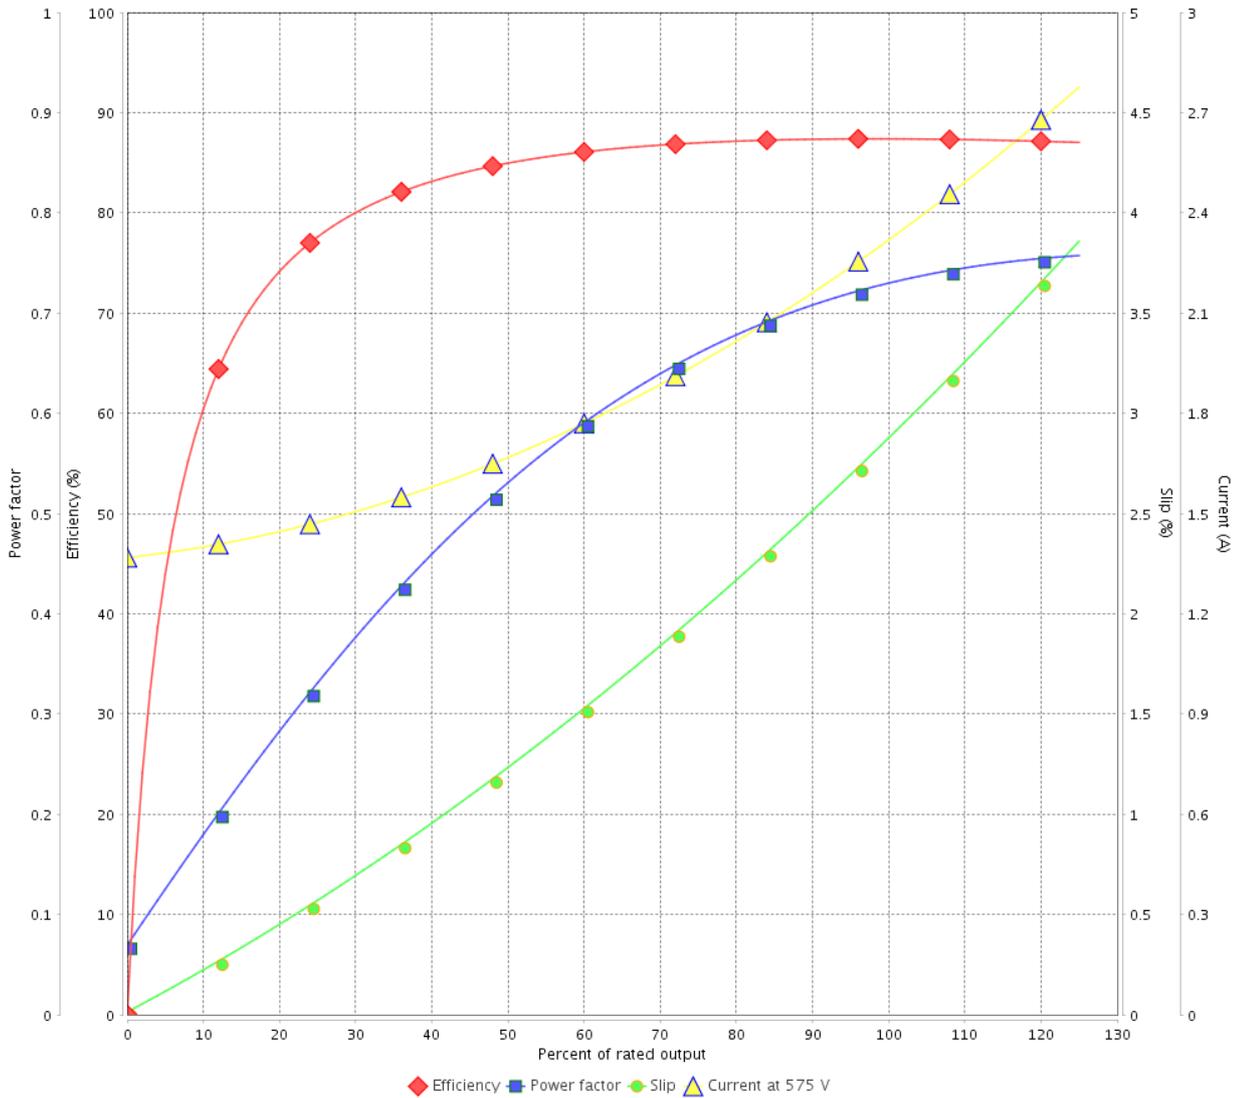

Performance : 575 V 60 Hz 6P

Rated current	: 2.36 A	Moment of inertia (J)	: 0.0118 kgm ²
LRC	: 6.6	Duty cycle	: Cont.(S1)
Rated torque	: 1.25 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1165 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/05/2022			