

# DATA SHEET


## Single Phase Induction Motor - Squirrel Cage



Customer	:			
Product line	: Jet Pump - J type Single-Phase	Product code : 13789730		
Frame	: W56J	Cooling method : IC411 - TEFC		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup> : CCW		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup> : 8.4 kg		
Protection degree	: IP55	Moment of inertia (J) : 0.0008 kgm <sup>2</sup>		
Design	: N			
Output [HP]		0.33		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		115/208-230		
Rated current [A]		5.20/2.88-2.60		
L. R. Amperes [A]		36.4/20.2-18.2		
LRC [A]		7.0x(Code P)		
No load current [A]		3.60/1.55-1.80		
Rated speed [RPM]		3490		
Slip [%]		3.06		
Rated torque [kgfm]		0.069		
Locked rotor torque [%]		290		
Breakdown torque [%]		290		
Service factor				
Temperature rise		80 K		
Locked rotor time		14s (cold) 8s (hot)		
Noise level <sup>2</sup>		66.0 dB(A)		
Efficiency (%)	25%	41.7		
	50%	44.5		
	75%	52.5		
	100%	56.5		
Power Factor	25%	0.34		
	50%	0.59		
	75%	0.67		
	100%	0.74		
Bearing type	: Drive end : 6203 2RS Non drive end : 6202 2RS	Foundation loads		
Sealing	: V'Ring Without Bearing Seal	Max. traction : 2 kgf		
Lubrication interval	: - -	Max. compression : 10 kgf		
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>		<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

# LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Single-Phase Product code : 13789730

LOAD PERFORMANCE CURVE

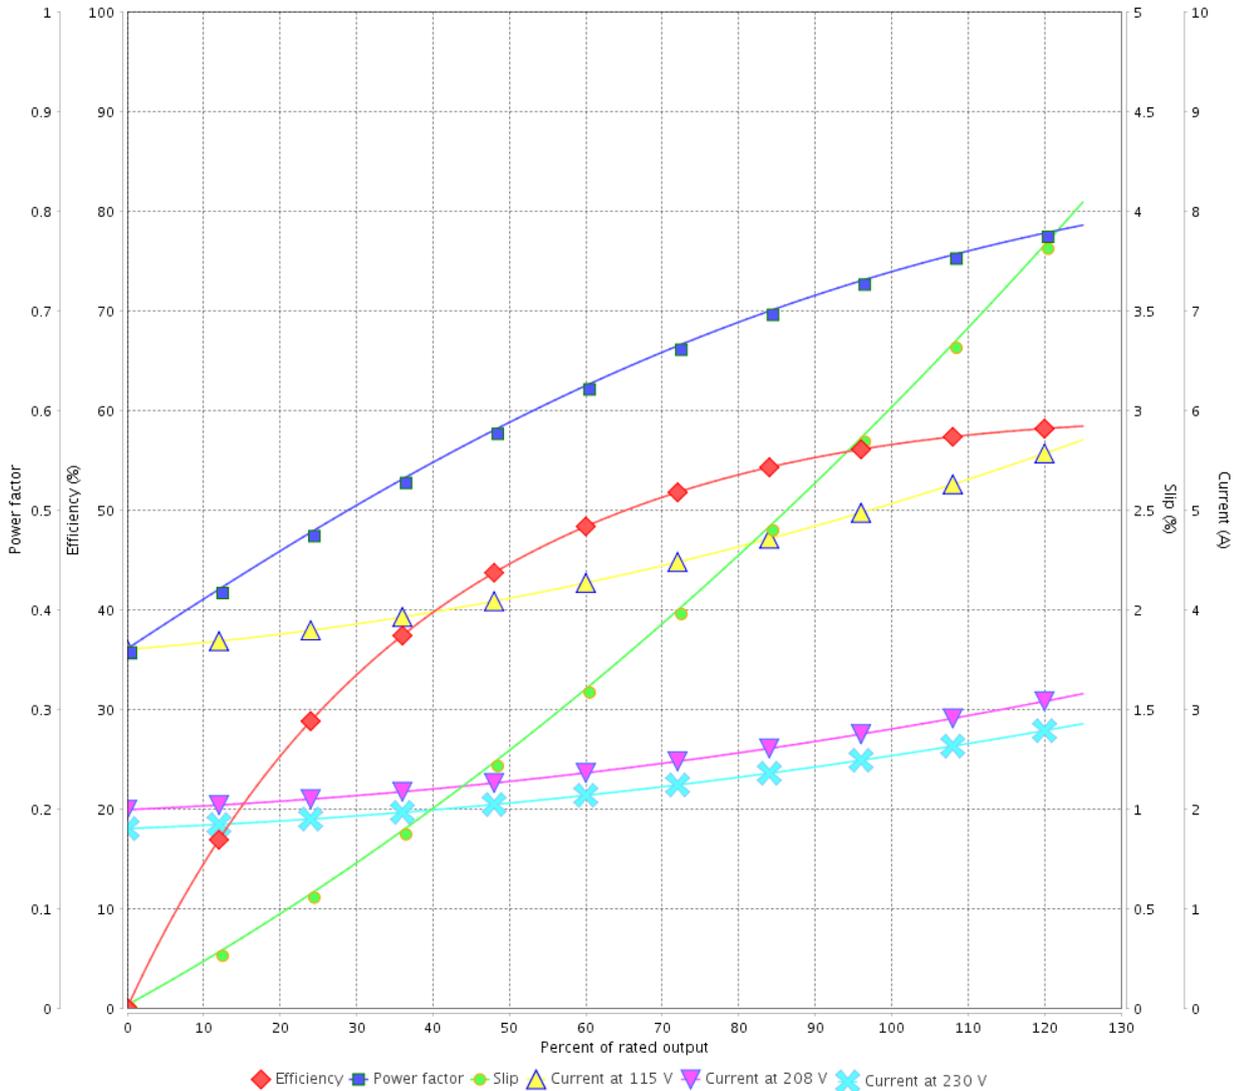

Performance : 115/208-230 V 60 Hz 2P

Rated current : 5.20/2.88-2.60 A  
 LRC : 7.0  
 Rated torque : 0.069 kgfm  
 Locked rotor torque : 290 %  
 Breakdown torque : 290 %  
 Rated speed : 3490 rpm

Moment of inertia (J) : 0.0008 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/05/2022			