

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line	: Three-Phase	Product code :	14477525	
Frame	: W56C	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 6.8 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0012 kgm ²	
Output [HP]	0.25	0.25	0.25	
Poles	4	4	4	
Frequency [Hz]	60	50	50	
Rated voltage [V]	208-230/460	190/380	220/415	
Rated current [A]	1.06-0.936/0.468	1.04/0.522	0.973/0.516	
L. R. Amperes [A]	5.96-5.24/2.62	4.70/2.35	4.67/2.48	
LRC [A]	5.6x(Code K)	4.5x(Code G)	4.8x(Code H)	
No load current [A]	0.650-0.754/0.377	0.738/0.369	0.758/0.402	
Rated speed [RPM]	1740	1415	1420	
Slip [%]	3.33	5.67	5.33	
Rated torque [kgfm]	0.104	0.128	0.128	
Locked rotor torque [%]	240	180	200	
Breakdown torque [%]	320	220	250	
Service factor		1.15	1.15	
Temperature rise	80 K	80 K	80 K	
Locked rotor time	50s (cold) 28s (hot)	46s (cold) 26s (hot)	43s (cold) 24s (hot)	
Noise level ²	50.0 dB(A)	49.0 dB(A)	49.0 dB(A)	
Efficiency (%)	25%			
	50%	59.5	60.3	
	75%	66.0	65.9	
	100%	70.0	67.2	
Power Factor	25%			
	50%	0.48	0.56	
	75%	0.60	0.69	
	100%	0.69	0.78	
Bearing type	: <u>Drive end</u> 6203 ZZ <u>Non drive end</u> 6202 ZZ	Foundation loads		
Sealing	: V'Ring V'Ring	Max. traction	: 6 kgf	
Lubrication interval	: - -	Max. compression	: 13 kgf	
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes USABLE @208V SF 1.00				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 4	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Three-Phase

Product code : 14477525

LOAD PERFORMANCE CURVE

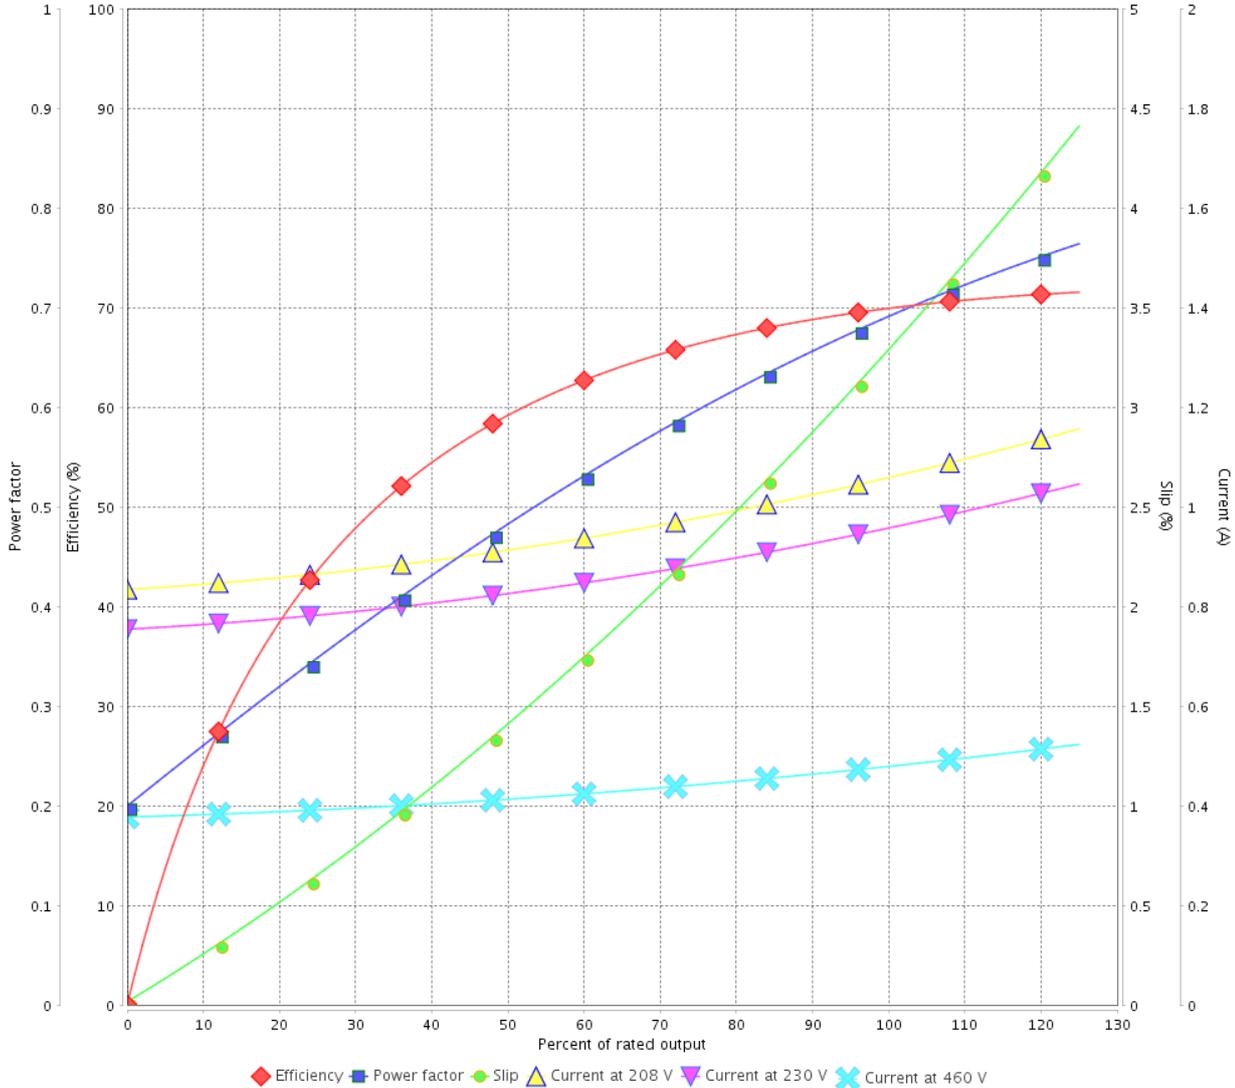

Performance : 208-230/460 V 60 Hz 4P

Rated current : 1.06-0.936/0.468 A
 LRC : 5.6
 Rated torque : 0.104 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 320 %
 Rated speed : 1740 rpm

Moment of inertia (J) : 0.0012 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Three-Phase

Product code : 14477525

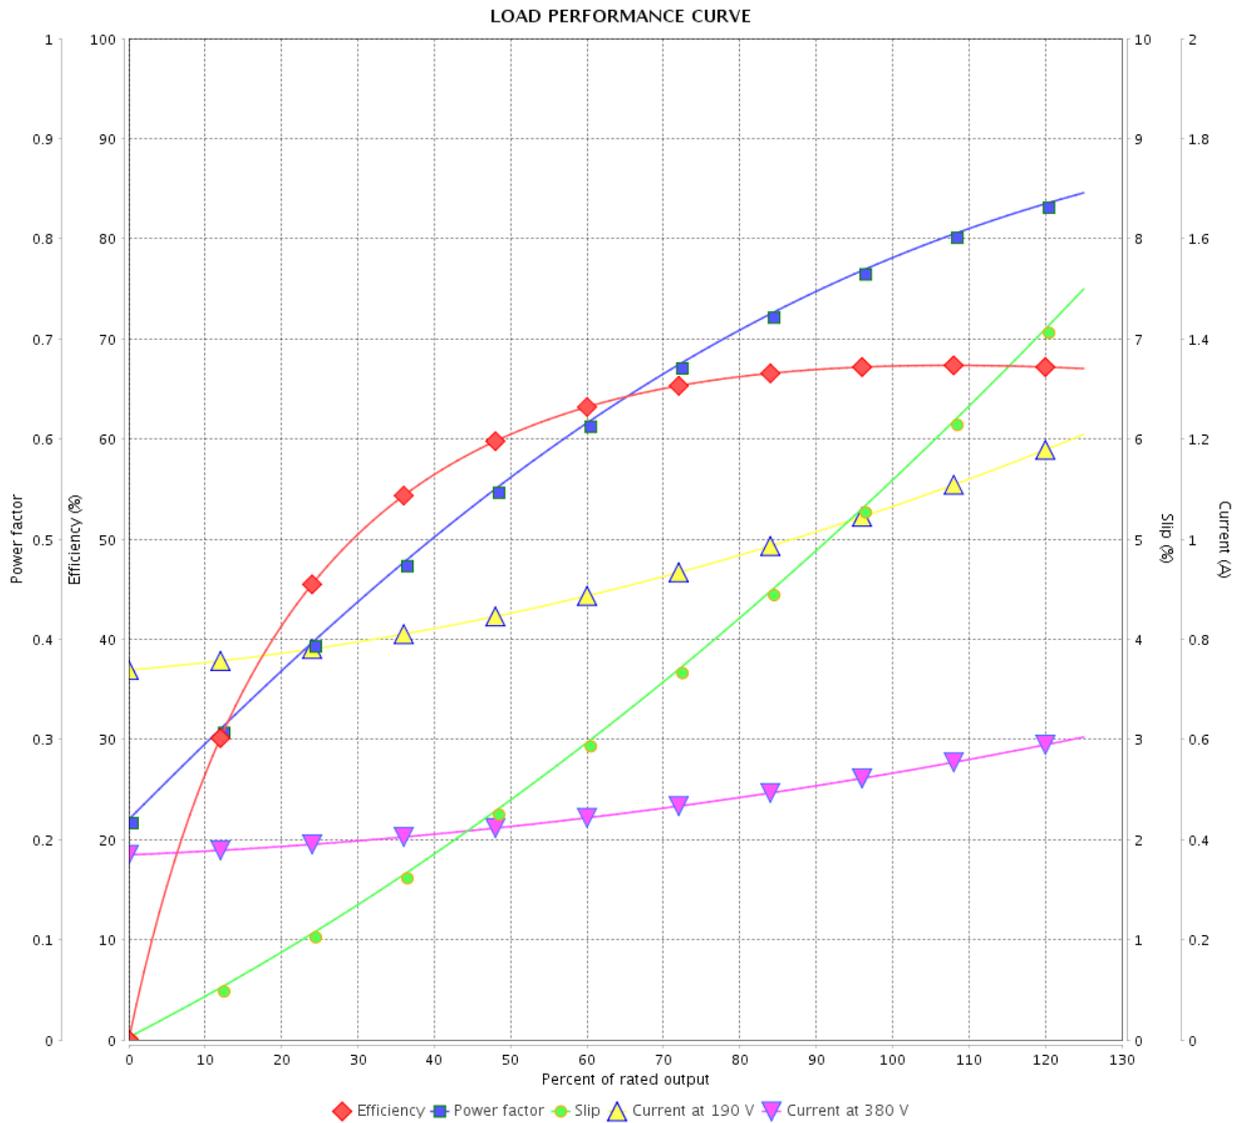

Performance : 190/380 V 50 Hz 4P


Rated current : 1.04/0.522 A
 LRC : 4.5
 Rated torque : 0.128 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 220 %
 Rated speed : 1415 rpm

Moment of inertia (J) : 0.0012 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			3 / 4	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Three-Phase

Product code : 14477525

LOAD PERFORMANCE CURVE

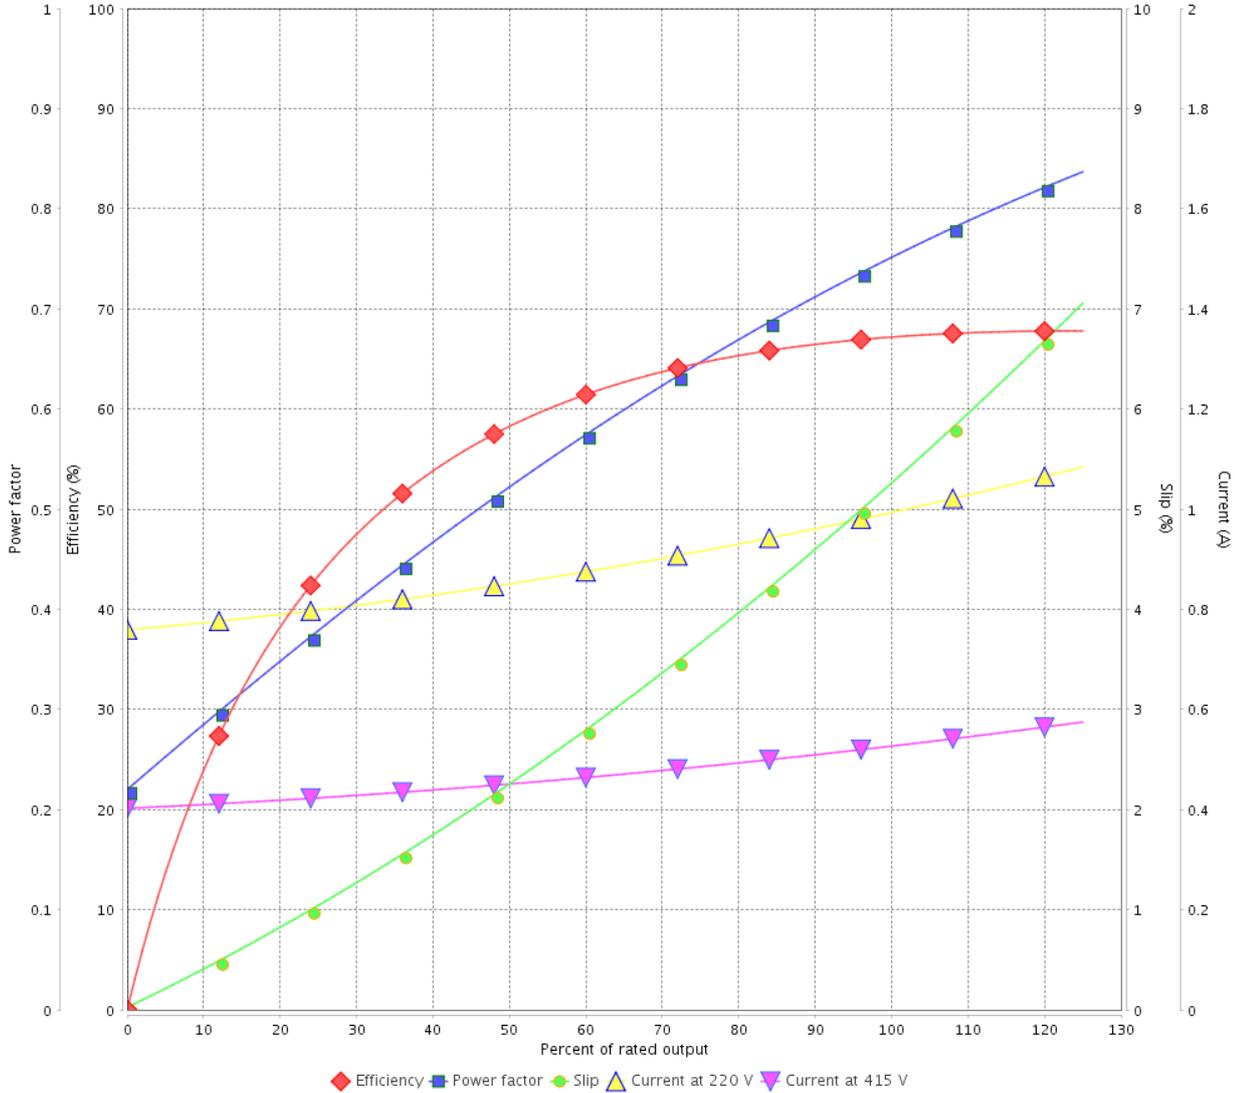

Performance : 220/415 V 50 Hz 4P

Rated current : 0.973/0.516 A
 LRC : 4.8
 Rated torque : 0.128 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 250 %
 Rated speed : 1420 rpm

Moment of inertia (J) : 0.0012 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	17/05/2022			