

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line	: Three-Phase	Product code :	14733009	
Frame	: W56	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 7.4 kg	
		Moment of inertia (J)	: 0.0015 kgm ²	
Output [HP]	0.33			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	0.492			
L. R. Amperes [A]	3.15			
LRC [A]	6.4x(Code L)			
No load current [A]	0.382			
Rated speed [RPM]	1740			
Slip [%]	3.33			
Rated torque [kgfm]	0.138			
Locked rotor torque [%]	270			
Breakdown torque [%]	360			
Service factor	1.35			
Temperature rise	80 K			
Locked rotor time	46s (cold) 26s (hot)			
Noise level ²	50.0 dB(A)			
Efficiency (%)	25%			
	50%	64.0		
	75%	72.0		
	100%	74.0		
Power Factor	25%			
	50%	0.47		
	75%	0.59		
	100%	0.69		
Bearing type	: <u>Drive end</u> 6203 ZZ	<u>Non drive end</u> 6202 ZZ	Foundation loads	
Sealing	: Without	Without	Max. traction : 12 kgf	
	Bearing Seal	Bearing Seal	Max. compression : 19 kgf	
Lubrication interval	: -	-		
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Three-Phase

Product code : 14733009

LOAD PERFORMANCE CURVE

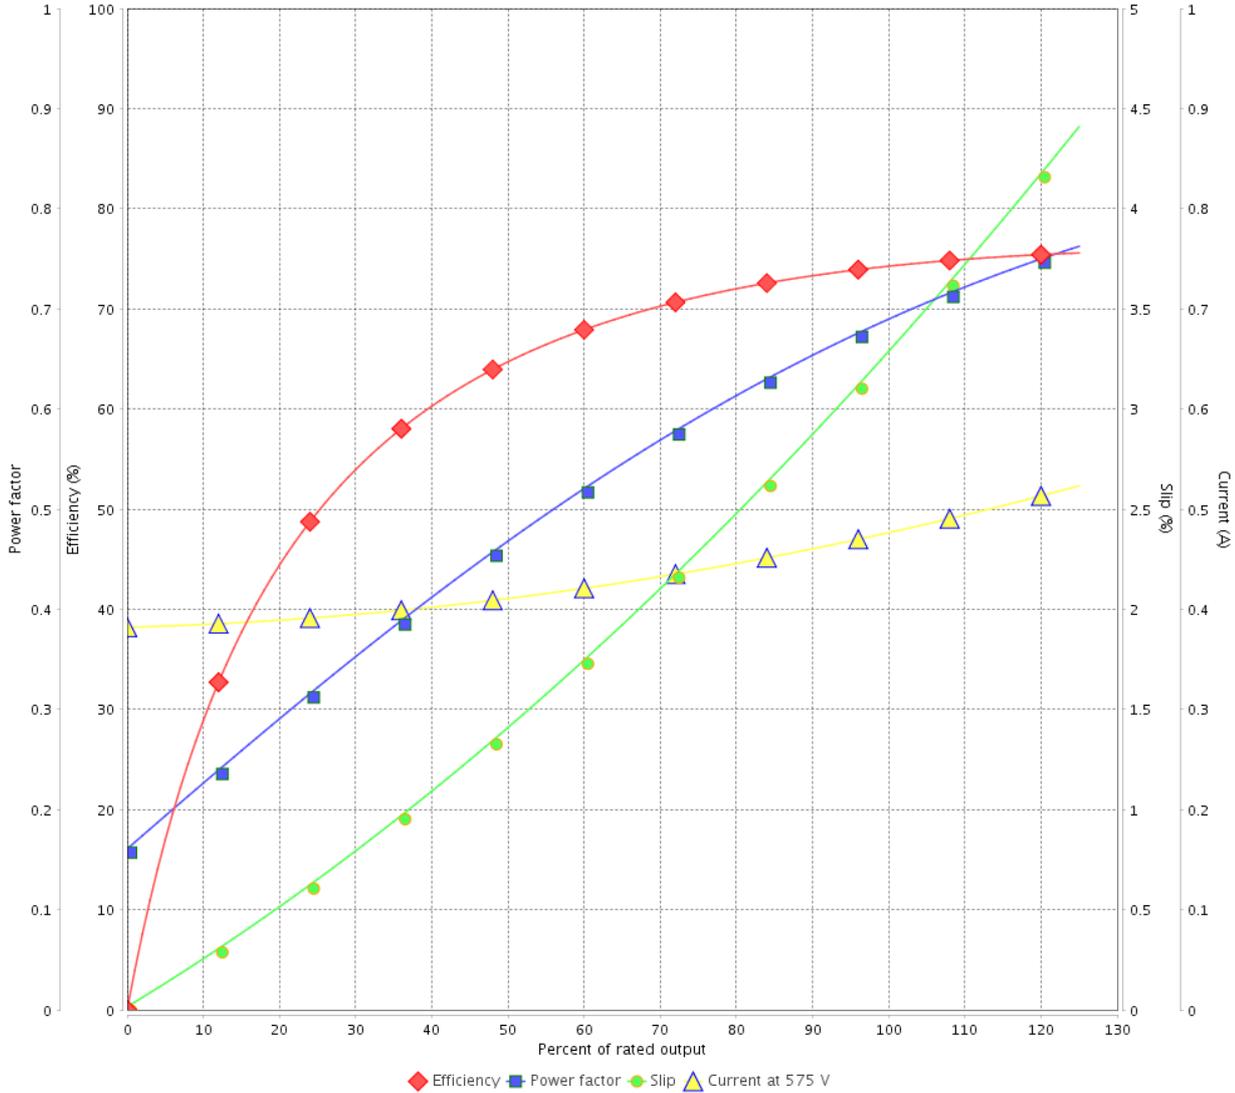

Performance : 575 V 60 Hz 4P

Rated current : 0.492 A
 LRC : 6.4
 Rated torque : 0.138 kgfm
 Locked rotor torque : 270 %
 Breakdown torque : 360 %
 Rated speed : 1740 rpm

Moment of inertia (J) : 0.0015 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.35
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/05/2022			