

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11416668

Frame	: 182/4T	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 44.1 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0169 kgm ²
Design	: B		

Output [HP]	5	4	4	4	5	5	5
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	13.0/6.49	6.42	6.21	6.23	7.74	7.44	7.35
L. R. Amperes [A]	97.4/48.7	44.9	47.8	51.1	44.9	47.6	50.7
LRC [A]	7.5x(Code J)	7.0x(Code J)	7.7x(Code K)	8.2x(Code L)	5.8x(Code G)	6.4x(Code H)	6.9x(Code J)
No load current [A]	5.80/2.90	2.80	3.10	3.30	2.80	3.10	3.30
Rated speed [RPM]	1750	1455	1455	1460	1430	1440	1445
Slip [%]	2.78	3.00	3.00	2.67	4.67	4.00	3.67
Rated torque [kgfm]	2.07	2.00	2.00	1.99	2.54	2.52	2.51
Locked rotor torque [%]	229	229	260	290	185	210	229
Breakdown torque [%]	290	300	320	350	225	250	270
Service factor	1.25	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	27s (cold) 15s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)
Noise level ²	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)
Efficiency (%)	25%	0.000			0.000		
	50%	88.5	87.5	86.7	86.5	88.5	87.5
	75%	89.5	88.2	88.2	88.2	87.5	88.5
	100%	89.5	87.7	88.2	88.2	86.5	87.5
Power Factor	25%	0.00			0.00		
	50%	0.62	0.61	0.57	0.53	0.69	0.61
	75%	0.74	0.75	0.71	0.67	0.80	0.77
	100%	0.80	0.81	0.79	0.76	0.84	0.80

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	11.2	13.4	12.8	12.8	14.9	13.6	13.6
	P2 (0,5;1,0)	9.4	11.2	10.7	10.7	12.5	11.4	11.4
	P3 (0,25;1,0)	8.7	10.3	9.9	9.9	11.5	10.5	10.5
	P4 (0,9;0,5)	5.3	6.4	6.1	6.1	7.1	6.5	6.5
	P5 (0,5;0,5)	3.7	4.4	4.2	4.2	4.9	4.4	4.4
	P6 (0,5;0,25)	2.4	2.9	2.7	2.7	3.2	2.9	2.9
	P7 (0,25;0,25)	1.7	2.1	2.0	2.0	2.3	2.1	2.1

Bearing type	Drive end	Non drive end	Foundation loads
	: 6207 ZZ	: 6206 ZZ	
	Sealing	V'Ring	
	: V'Ring	: V'Ring	
	Lubrication interval	-	
Lubricant amount	: -	: -	Max. traction : 120 kgf
	: -	: -	
	: -	: -	
Lubricant type : Mobil Polyrex EM			Max. compression : 164 kgf

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by						
Date	20/10/2024				Page 1 / 9	Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Notes
USABLE @208V 14.3A SF 1.15 SFA 16.4A

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 9		Revision
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11416668

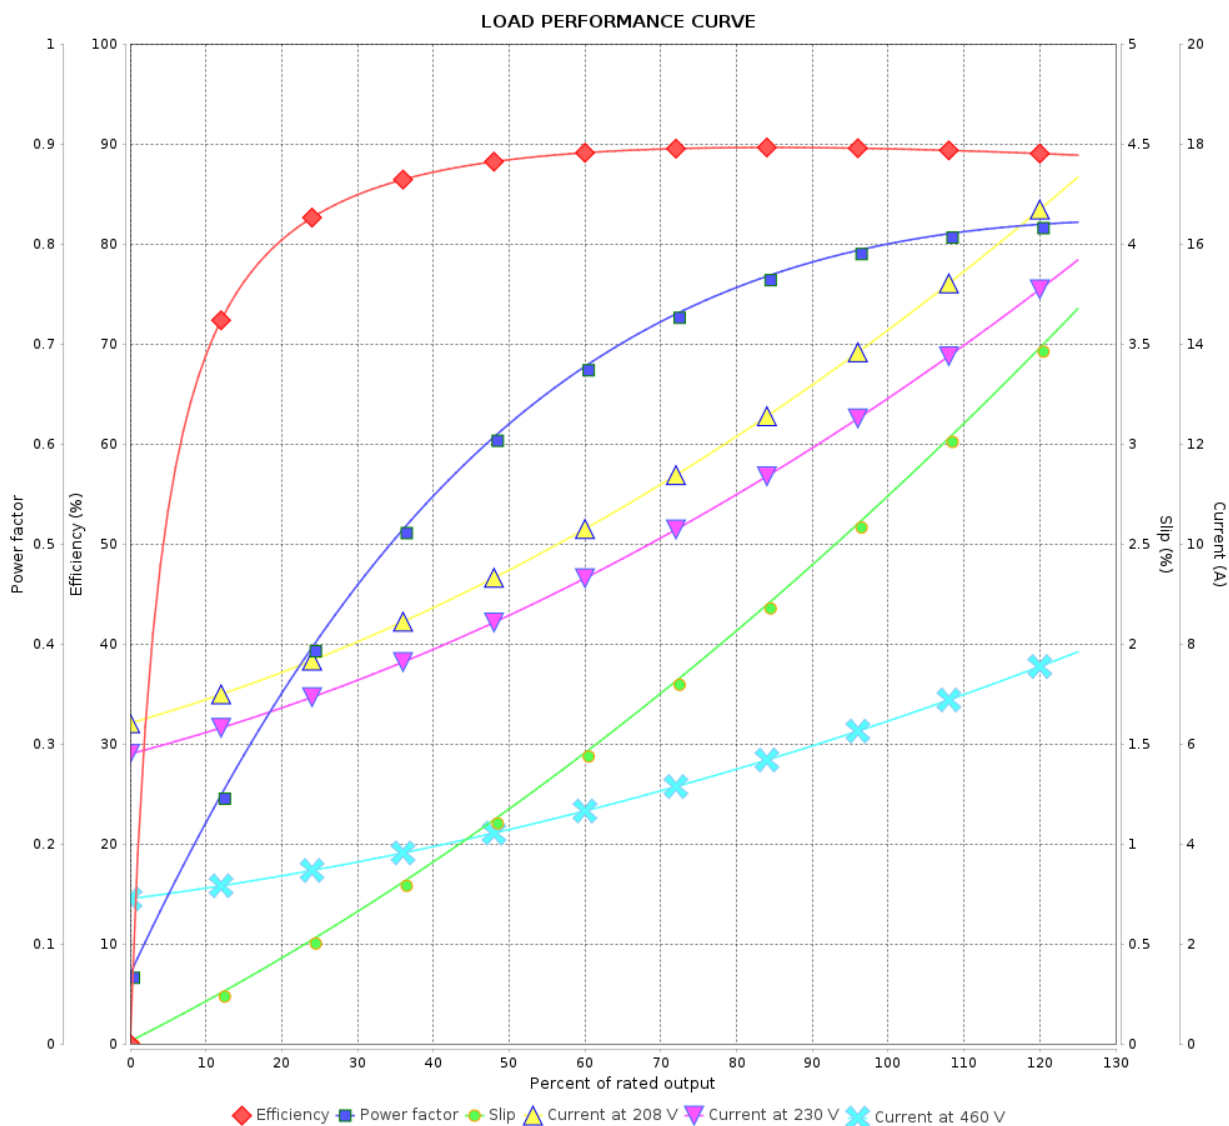

Performance : 230/460 V 60 Hz 4P

Rated current : 13.0/6.49 A
LRC : 7.5
Rated torque : 2.07 kgfm
Locked rotor torque : 229 %
Breakdown torque : 290 %
Rated speed : 1750 rpm

Moment of inertia (J) : 0.0169 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 3 / 9	Revision
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11416668

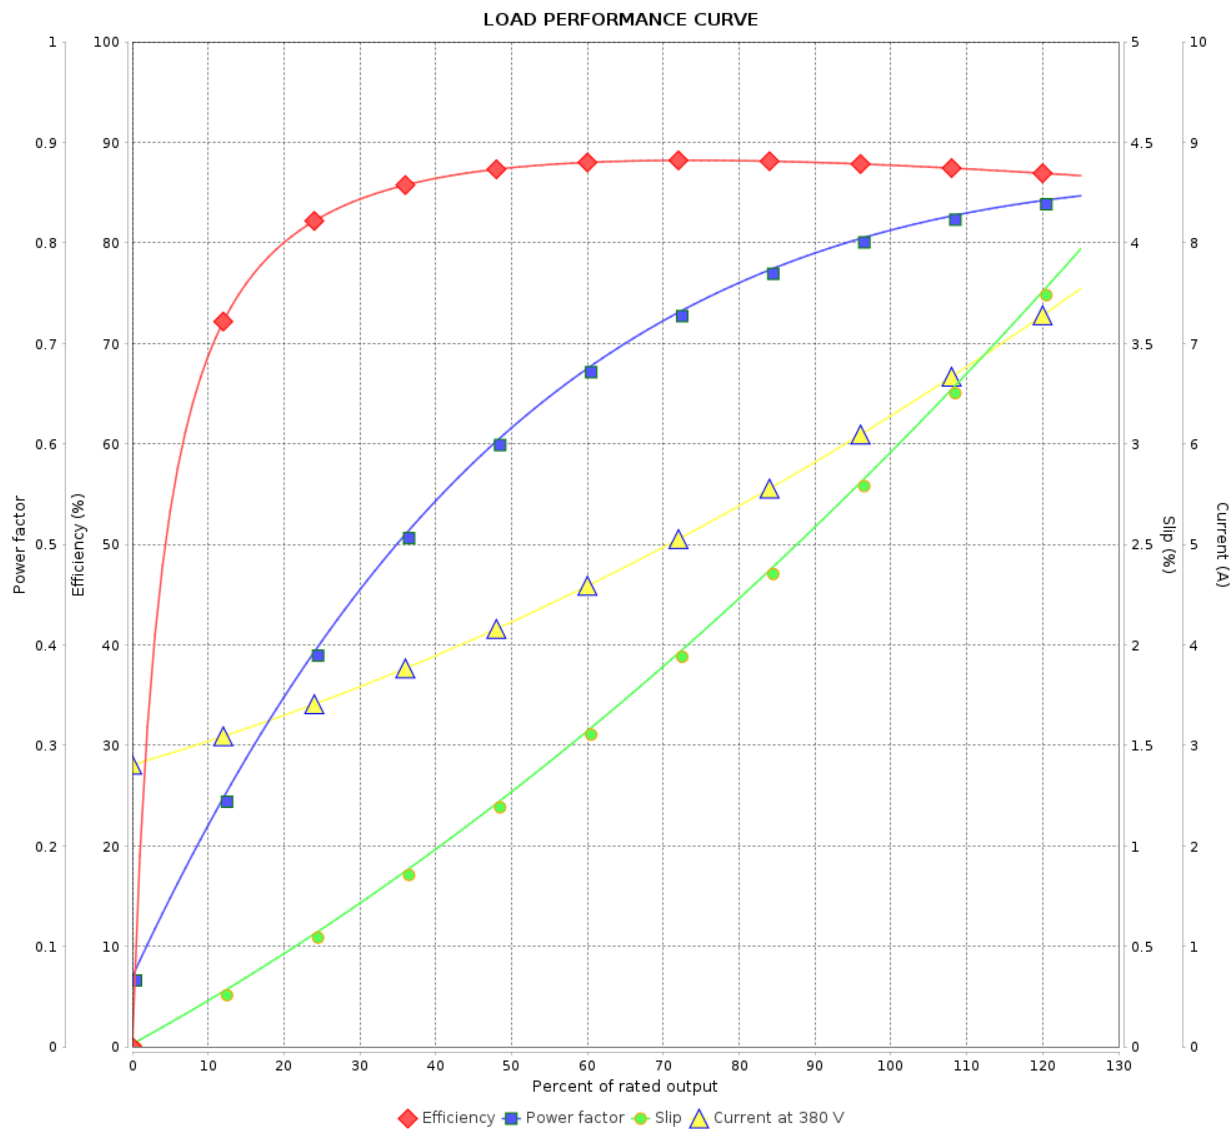

Performance : 380 V 50 Hz 4P IE3

Rated current : 6.42 A
LRC : 7.0
Rated torque : 2.00 kgfm
Locked rotor torque : 229 %
Breakdown torque : 300 %
Rated speed : 1455 rpm

Moment of inertia (J) : 0.0169 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 4 / 9	Revision
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11416668

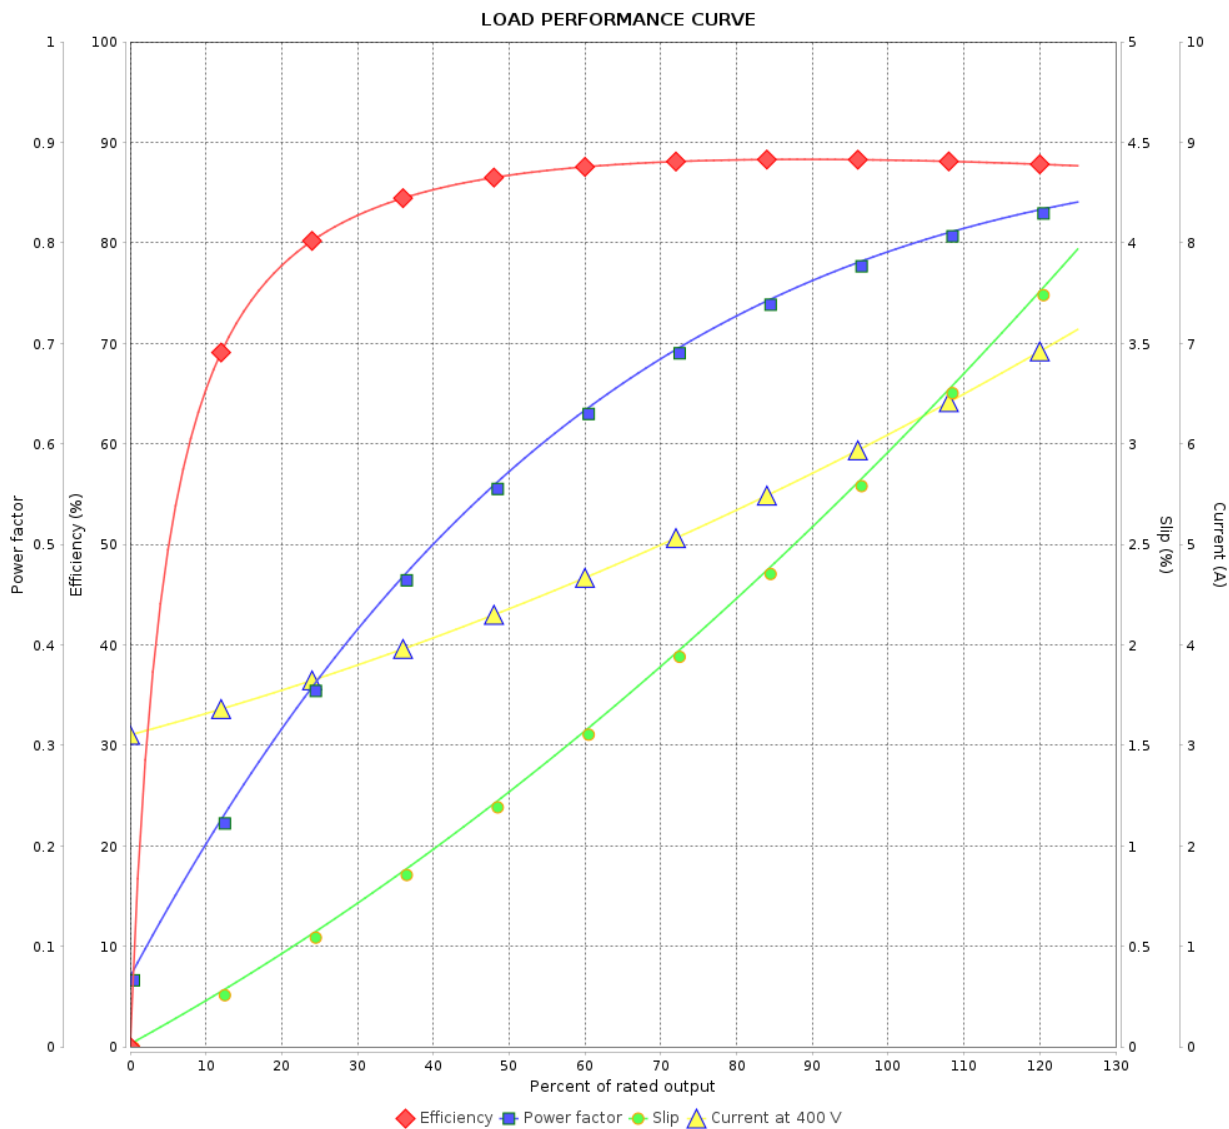

Performance : 400 V 50 Hz 4P IE3

Rated current : 6.21 A
LRC : 7.7
Rated torque : 2.00 kgfm
Locked rotor torque : 260 %
Breakdown torque : 320 %
Rated speed : 1455 rpm

Moment of inertia (J) : 0.0169 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 5 / 9	Revision
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11416668

LOAD PERFORMANCE CURVE

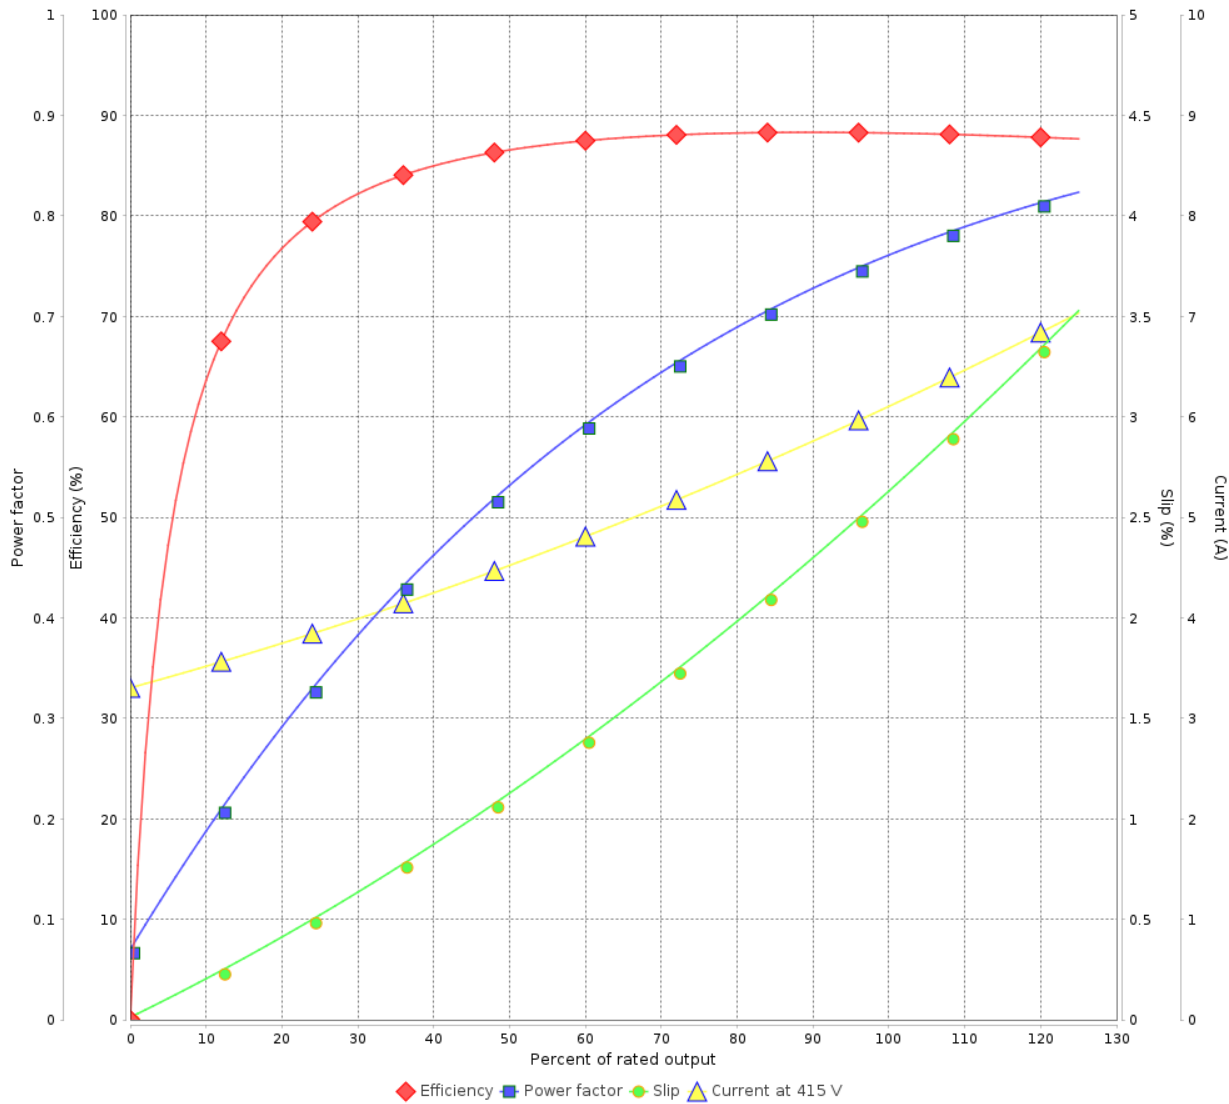

Performance : 415 V 50 Hz 4P IE3			
Rated current	: 6.23 A	Moment of inertia (J)	: 0.0169 kgm ²
LRC	: 8.2	Duty cycle	: Cont.(S1)
Rated torque	: 1.99 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.15
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1460 rpm	Design	: B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 6 / 9	Revision
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11416668

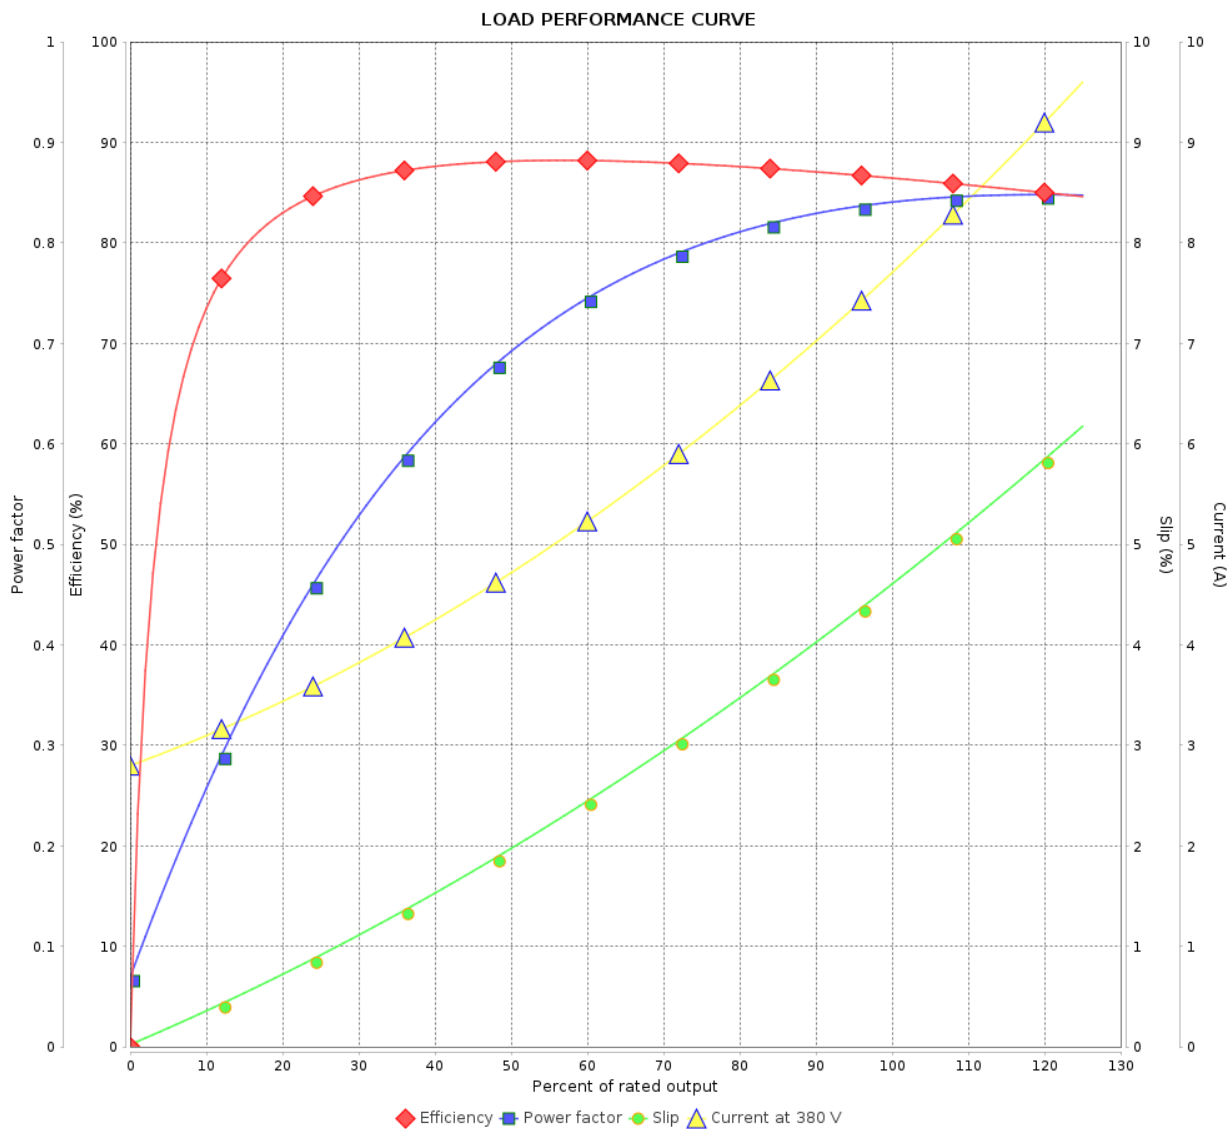

Performance : 380 V 50 Hz 4P IE2

Rated current : 7.74 A
LRC : 5.8
Rated torque : 2.54 kgfm
Locked rotor torque : 185 %
Breakdown torque : 225 %
Rated speed : 1430 rpm

Moment of inertia (J) : 0.0169 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 7 / 9	Revision
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11416668

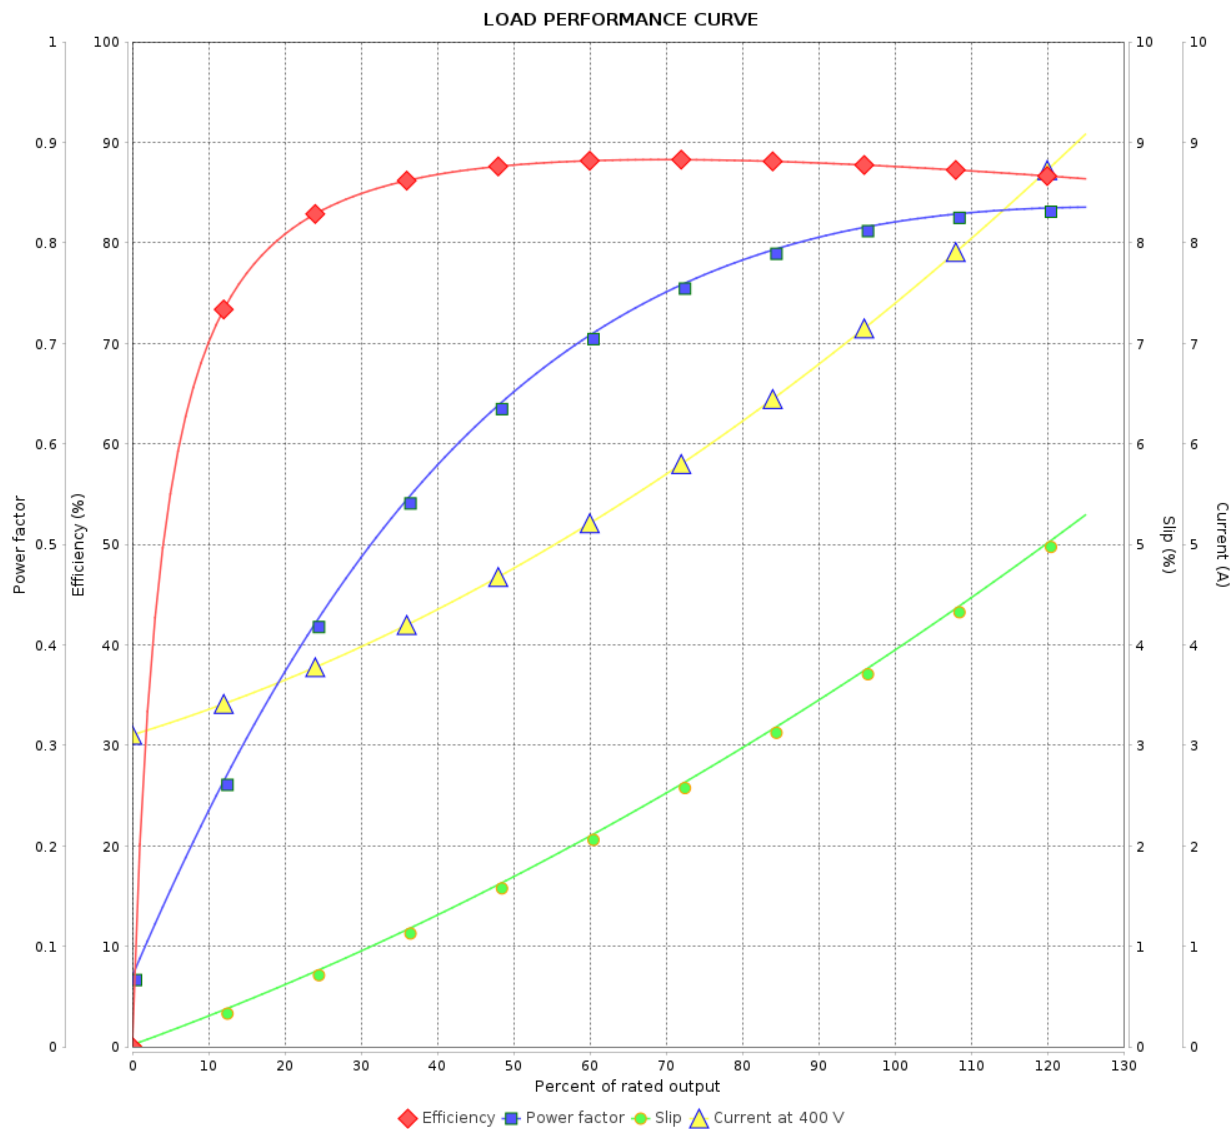

Performance : 400 V 50 Hz 4P IE2

Rated current : 7.44 A
LRC : 6.4
Rated torque : 2.52 kgfm
Locked rotor torque : 210 %
Breakdown torque : 250 %
Rated speed : 1440 rpm

Moment of inertia (J) : 0.0169 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				8 / 9	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11416668

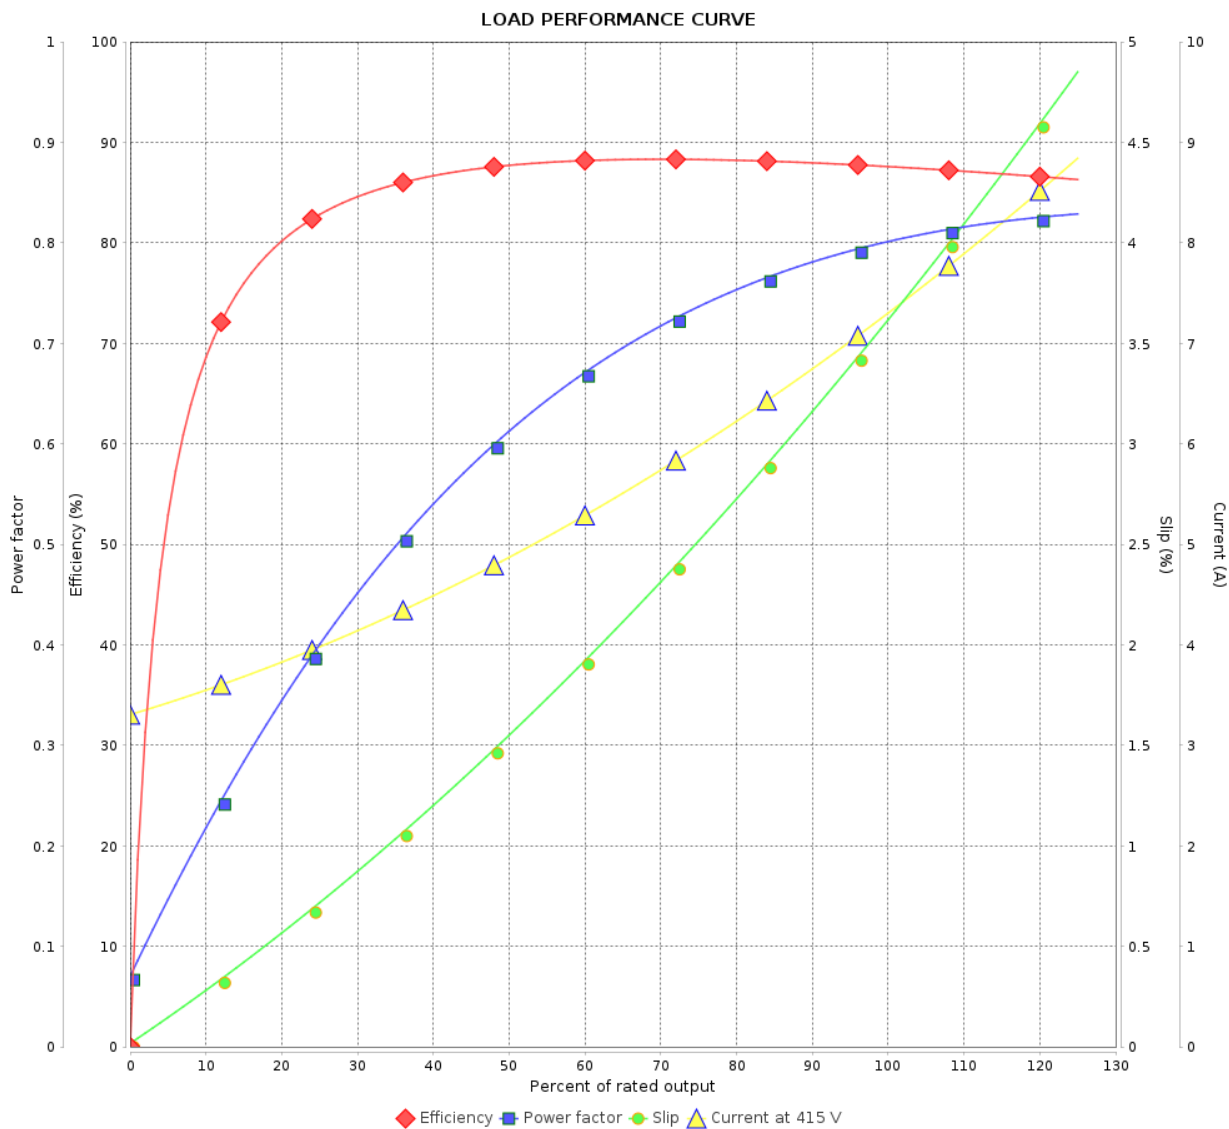

Performance : 415 V 50 Hz 4P IE2

Rated current : 7.35 A
LRC : 6.9
Rated torque : 2.51 kgfm
Locked rotor torque : 229 %
Breakdown torque : 270 %
Rated speed : 1445 rpm

Moment of inertia (J) : 0.0169 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 9 / 9	Revision
Checked by					
Date	20/10/2024				