

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA Premium Efficiency Three-Phase Product code : 12122308

Frame	: 447T	Locked rotor time	: 52s (cold) 29s (hot)
Output	: 200 HP (150 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 184 A	Protection degree	: IP55
L. R. Amperes	: 1251 A	Cooling method	: IC411 - TEFC
LRC	: 6.8x(Code G)	Mounting	: F-1
No load current	: 59.2 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1782 rpm	Noise level <sup>2</sup>	: 82.0 dB(A)
Slip	: 1.00 %	Starting method	: Direct On Line
Rated torque	: 81.5 kgfm	Approx. weight <sup>3</sup>	: 1126 kg
Locked rotor torque	: 210 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 3.21 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	95.8	96.2	96.2	Max. traction	: 1079 kgf
Power Factor	0.72	0.80	0.85	Max. compression	: 2198 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6319 C3	6316 C3
Sealing	:	Viton Oil Seal	Viton Seal
Lubrication interval	:	7038 h	8569 h
Lubricant amount	:	45 g	34 g
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 3 Revision		
Checked by				
Date	21/10/2024			

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 3	
Date	21/10/2024				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA  
Premium Efficiency Three-Phase

Product code : 12122308

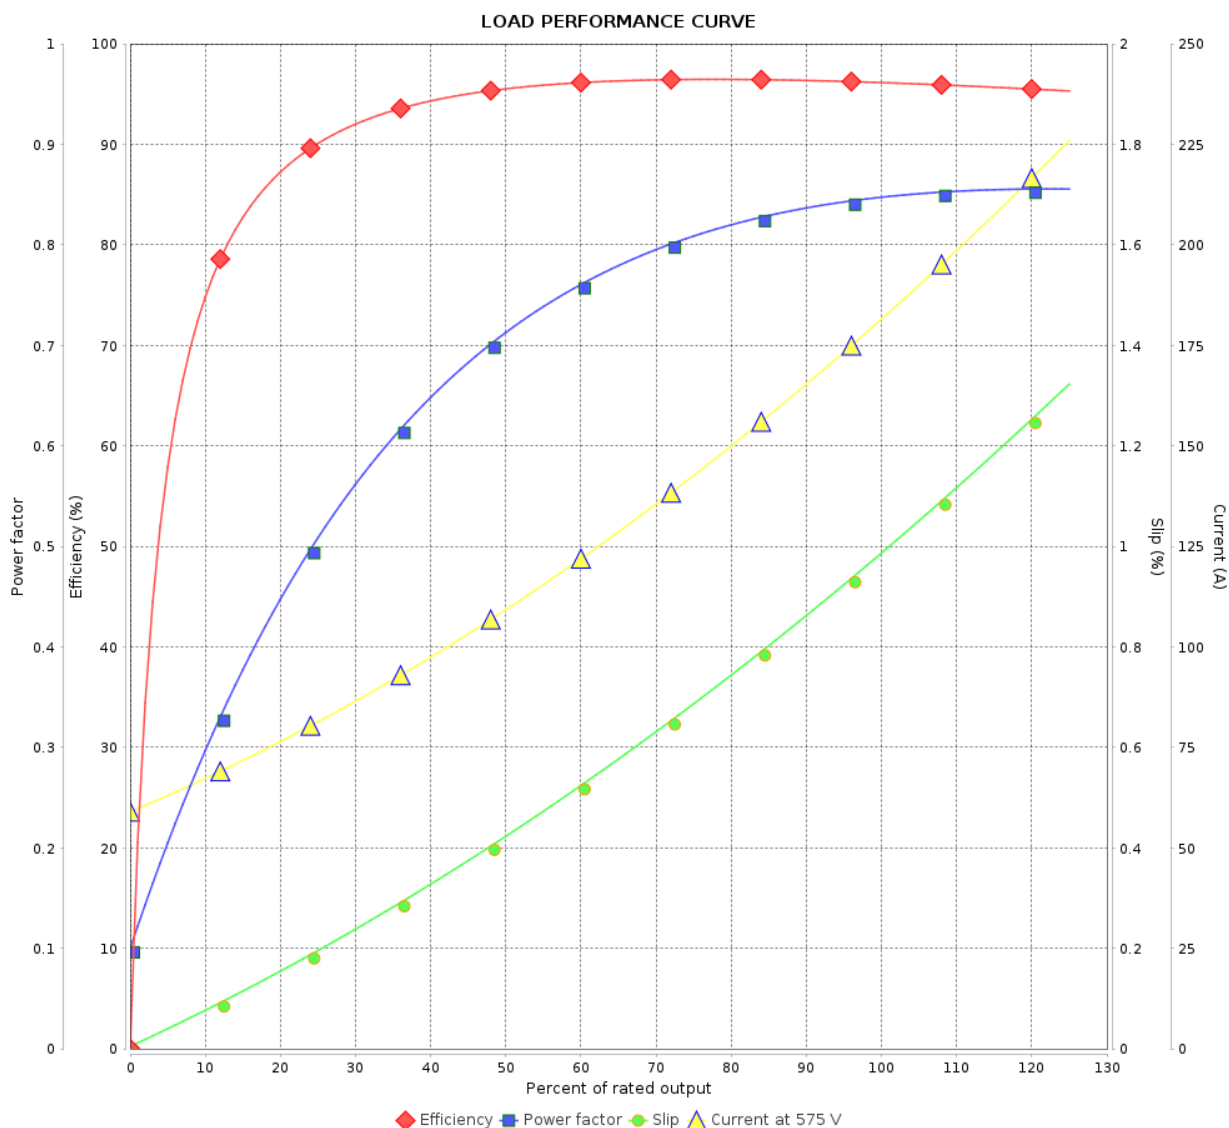

Performance : 575 V 60 Hz 4P

Rated current : 184 A  
LRC : 6.8  
Rated torque : 81.5 kgfm  
Locked rotor torque : 210 %  
Breakdown torque : 229 %  
Rated speed : 1782 rpm

Moment of inertia (J) : 3.21 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 3Revision		
Checked by				
Date	21/10/2024			