

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W22 IEEE 841 NEMA Premium Efficiency Three-Phase		Product code :		11432631
Frame	:	182/4T		Locked rotor time	:	45s (cold) 25s (hot)
Output	:	5 HP (3.7 kW)		Temperature rise	:	80 K
Poles	:	2		Duty cycle	:	Cont.(S1)
Frequency	:	60 Hz		Ambient temperature	:	-20°C to +40°C
Rated voltage	:	575 V		Altitude	:	1000 m.a.s.l.
Rated current	:	4.72 A		Protection degree	:	IP56
L. R. Amperes	:	35.9 A		Cooling method	:	IC411 - TEFC
LRC	:	7.6x(Code J)		Mounting	:	F-1
No load current	:	1.60 A		Rotation <sup>1</sup>	:	Both (CW and CCW)
Rated speed	:	3485 rpm		Noise level <sup>2</sup>	:	66.0 dB(A)
Slip	:	3.19 %		Starting method	:	Direct On Line
Rated torque	:	1.04 kgfm		Approx. weight <sup>3</sup>	:	47.3 kg
Locked rotor torque	:	229 %				
Breakdown torque	:	350 %				
Insulation class	:	F				
Service factor	:	1.25				
Moment of inertia (J)	:	0.0094 kgm <sup>2</sup>				
Design	:	B				
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	86.5	88.5	88.5	Max. traction	:	52 kgf
Power Factor	0.76	0.85	0.89	Max. compression	:	100 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
12.4	9.9	8.9	6.2	3.7	2.3	1.4
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6207 C3		6206 C3		
Sealing	:	Inpro/Seal		Inpro/Seal		
Lubrication interval	:	20000 h		20000 h		
Lubricant amount	:	7 g		5 g		
Lubricant type	:	Mobil Polyrex EM				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	22/10/2024				1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11432631

LOAD PERFORMANCE CURVE

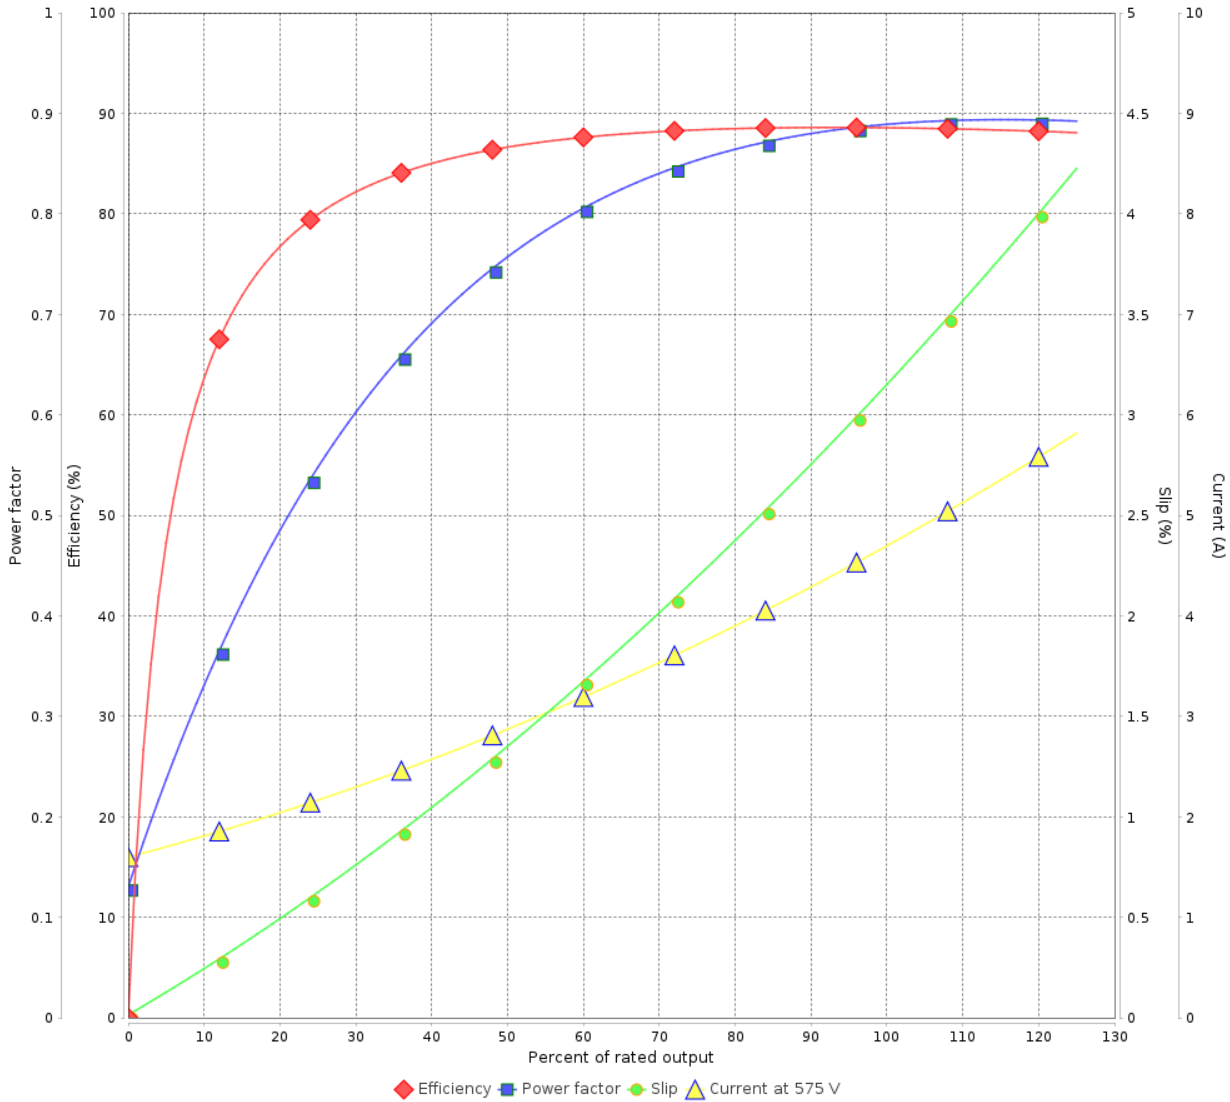

Performance : 575 V 60 Hz 2P

Rated current	: 4.72 A	Moment of inertia (J)	: 0.0094 kgm <sup>2</sup>
LRC	: 7.6	Duty cycle	: Cont.(S1)
Rated torque	: 1.04 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.25
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 3485 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 2		
Date	22/10/2024			