

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11943168

Frame	: 324/6TS	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 0.0 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.2422 kgm ²
Design	: B		

Output [HP]	50	40	40	40	50	50	50
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	56.7	54.9	52.7	51.4	69.4	65.4	63.3
L. R. Amperes [A]	357	362	374	370	361	366	392
LRC [A]	6.3x(Code G)	6.6x(Code G)	7.1x(Code H)	7.2x(Code H)	5.2x(Code E)	5.6x(Code F)	6.2x(Code G)
No load current [A]	14.0	13.0	14.0	15.0	13.0	14.0	15.0
Rated speed [RPM]	3555	2955	2960	2965	2935	2945	2950
Slip [%]	1.25	1.50	1.33	1.17	2.17	1.83	1.67
Rated torque [kgfm]	10.2	9.82	9.81	9.79	12.4	12.3	12.3
Locked rotor torque [%]	240	240	260	280	190	210	229
Breakdown torque [%]	229	229	250	280	200	200	220
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	63s (cold) 35s (hot)	68s (cold) 38s (hot)	64s (cold) 36s (hot)	61s (cold) 34s (hot)	37s (cold) 21s (hot)	43s (cold) 24s (hot)	43s (cold) 24s (hot)
Noise level ²	76.0 dB(A)	72.0 dB(A)	72.0 dB(A)	72.0 dB(A)	72.0 dB(A)	72.0 dB(A)	72.0 dB(A)
Efficiency (%)	25%						
	50%	93.0	92.8	92.2	92.2	93.0	93.0
	75%	93.0	92.9	92.8	93.1	92.4	93.0
	100%	93.0	93.3	93.3	93.3	91.0	92.4
Power Factor	25%						
	50%	0.81	0.80	0.77	0.76	0.85	0.82
	75%	0.87	0.87	0.85	0.84	0.88	0.86
	100%	0.88	0.89	0.88	0.87	0.89	0.88

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	8.2	7.8	7.8	7.8	10.8	9.9	8.9
	P2 (0,5;1,0)	6.5	6.2	6.2	6.2	9.0	8.2	7.3
	P3 (0,25;1,0)	5.8	5.5	5.5	5.5	8.3	7.4	6.5
	P4 (0,9;0,5)	4.0	3.9	3.9	3.9	5.2	4.8	4.4
	P5 (0,5;0,5)	2.5	2.4	2.4	2.4	3.4	3.1	2.8
	P6 (0,5;0,25)	1.6	1.5	1.5	1.5	2.2	2.0	1.8
	P7 (0,25;0,25)	1.0	1.0	1.0	1.0	1.5	1.4	1.2

Bearing type	: 6312 C3	Non drive end	6212 C3	Foundation loads	
Sealing	: Taconite		Taconite	Max. traction	: 340 kgf
	: Labyrinth		Labyrinth	Max. compression	: 340 kgf
Lubrication interval	: 12000 h		15000 h		
Lubricant amount	: 21 g		13 g		
Lubricant type	: Mobil Polyrex EM				

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	22/10/2024		Page 1 / 9	Revision

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

Subject to change without notice

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 9		Revision
Checked by					
Date	22/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11943168

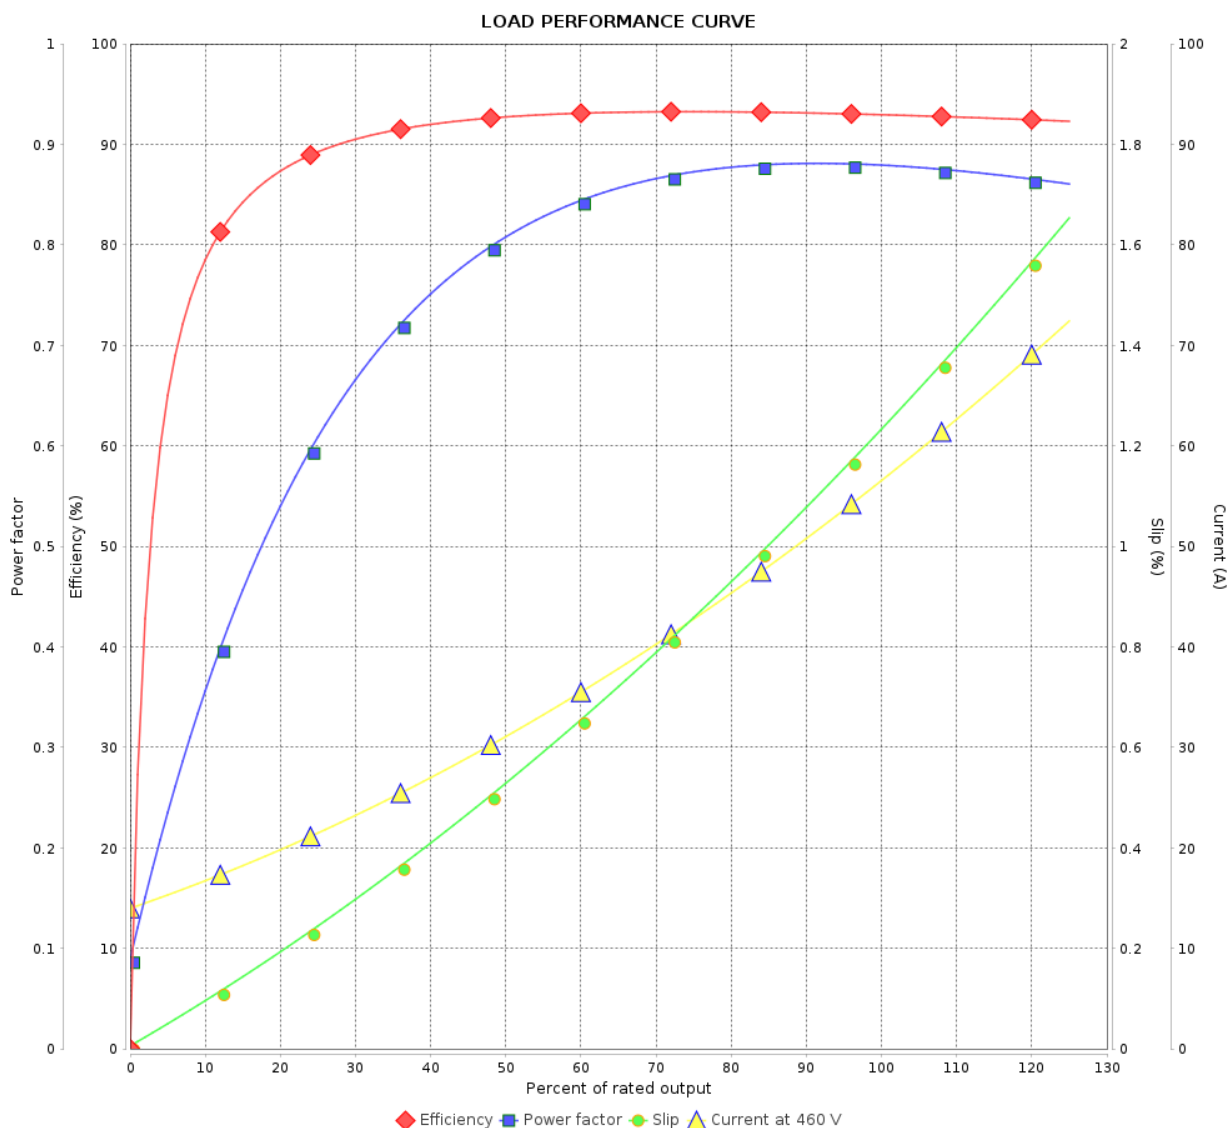

Performance : 460 V 60 Hz 2P

Rated current : 56.7 A
LRC : 6.3
Rated torque : 10.2 kgfm
Locked rotor torque : 240 %
Breakdown torque : 229 %
Rated speed : 3555 rpm

Moment of inertia (J) : 0.2422 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 9Revision		
Checked by				
Date	22/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11943168

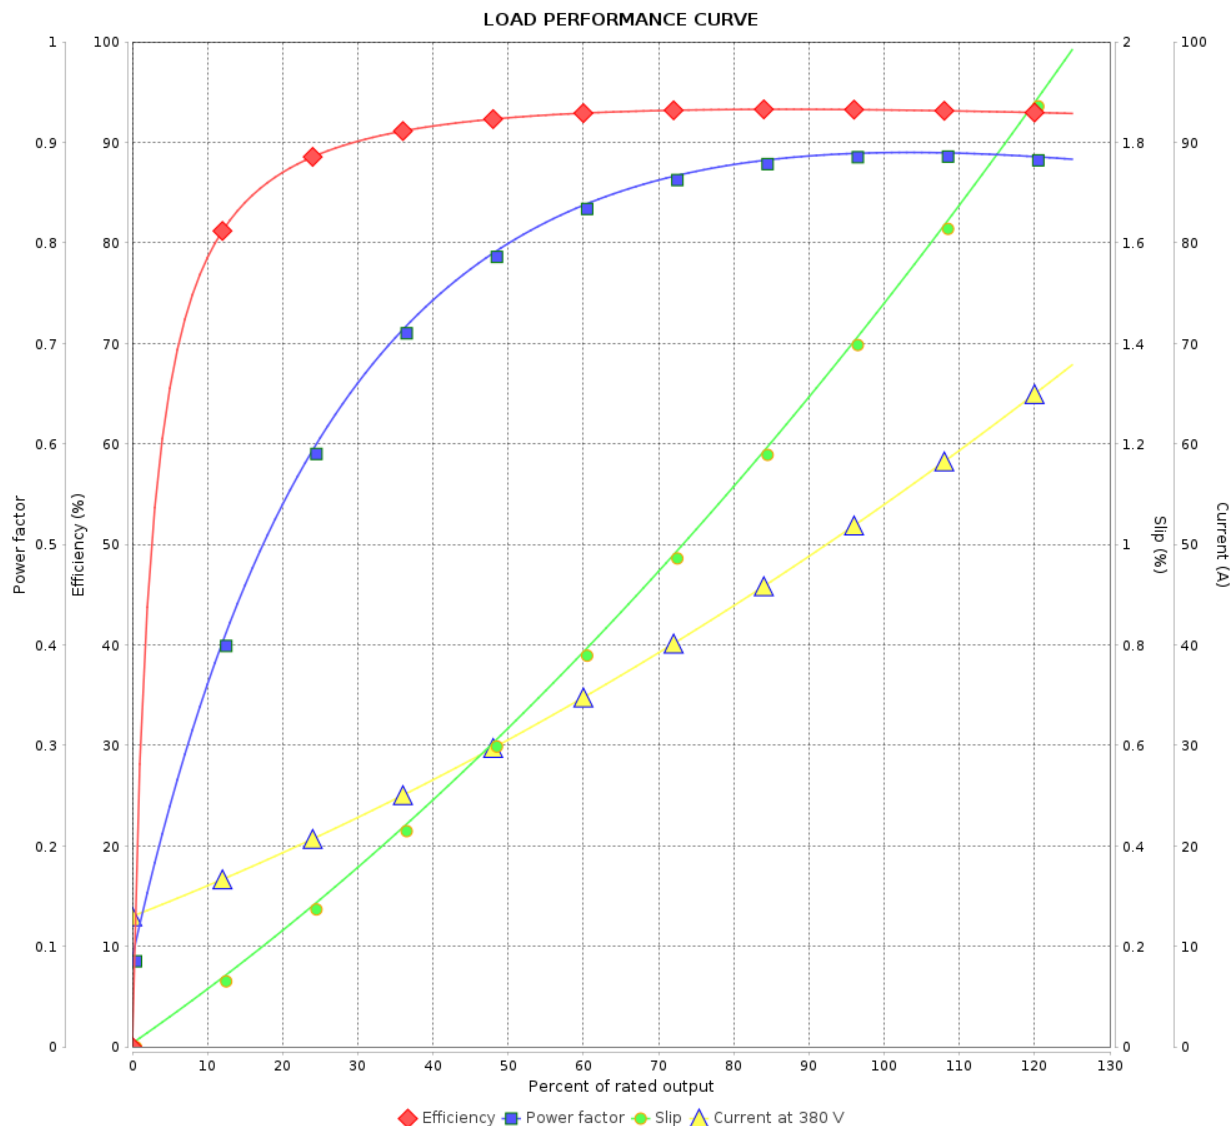

Performance : 380 V 50 Hz 2P IE3

Rated current : 54.9 A
LRC : 6.6
Rated torque : 9.82 kgfm
Locked rotor torque : 240 %
Breakdown torque : 229 %
Rated speed : 2955 rpm

Moment of inertia (J) : 0.2422 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 9	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11943168

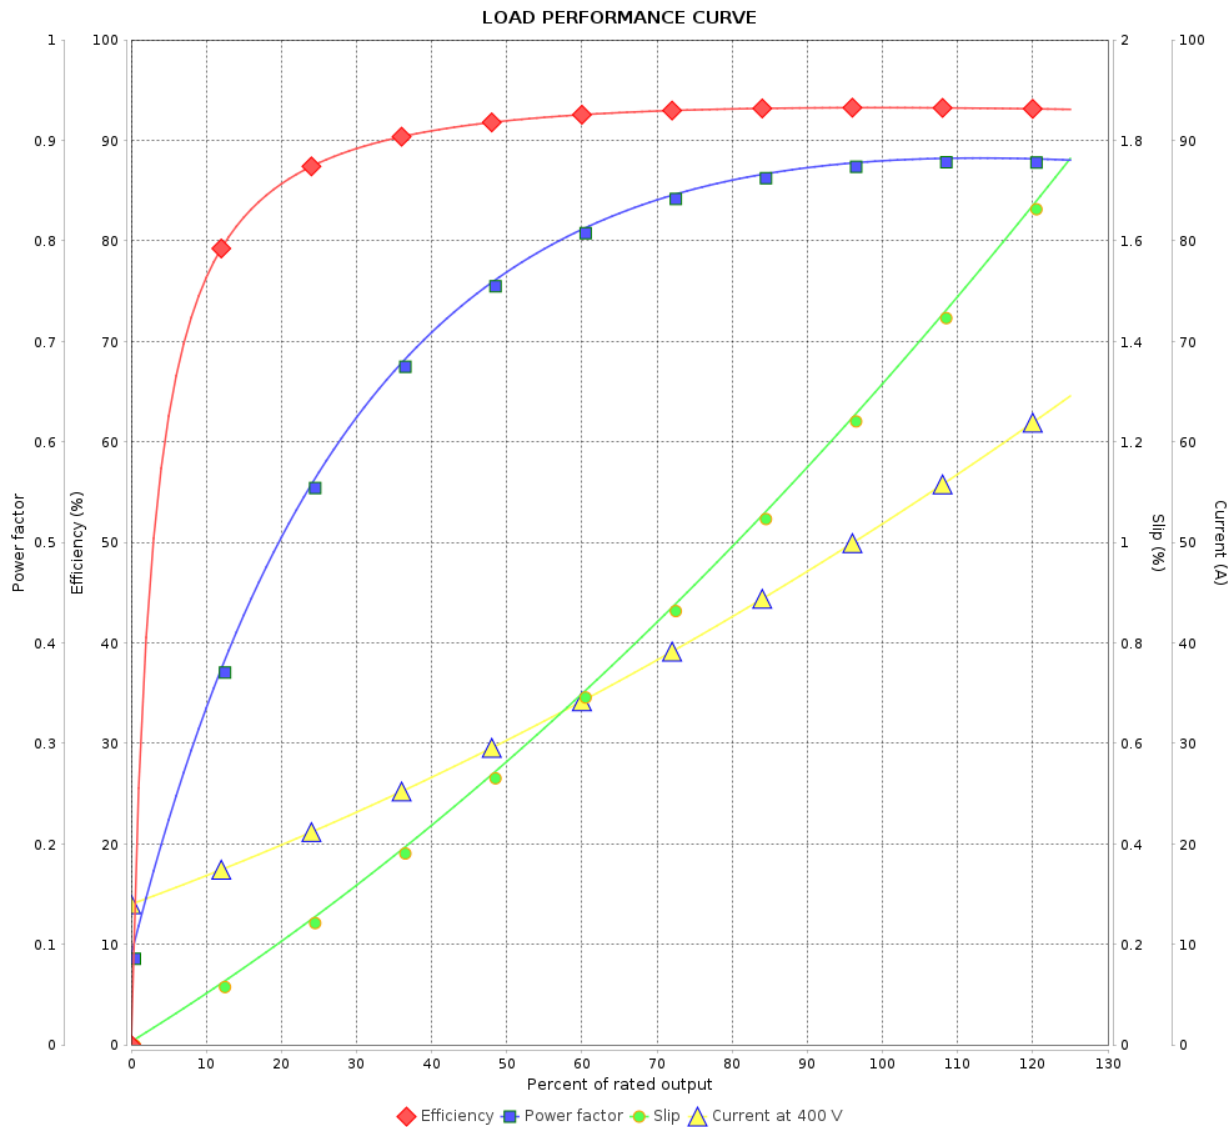

Performance : 400 V 50 Hz 2P IE3

Rated current : 52.7 A
LRC : 7.1
Rated torque : 9.81 kgfm
Locked rotor torque : 260 %
Breakdown torque : 250 %
Rated speed : 2960 rpm

Moment of inertia (J) : 0.2422 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 5 / 9	Revision
Checked by					
Date	22/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11943168

LOAD PERFORMANCE CURVE

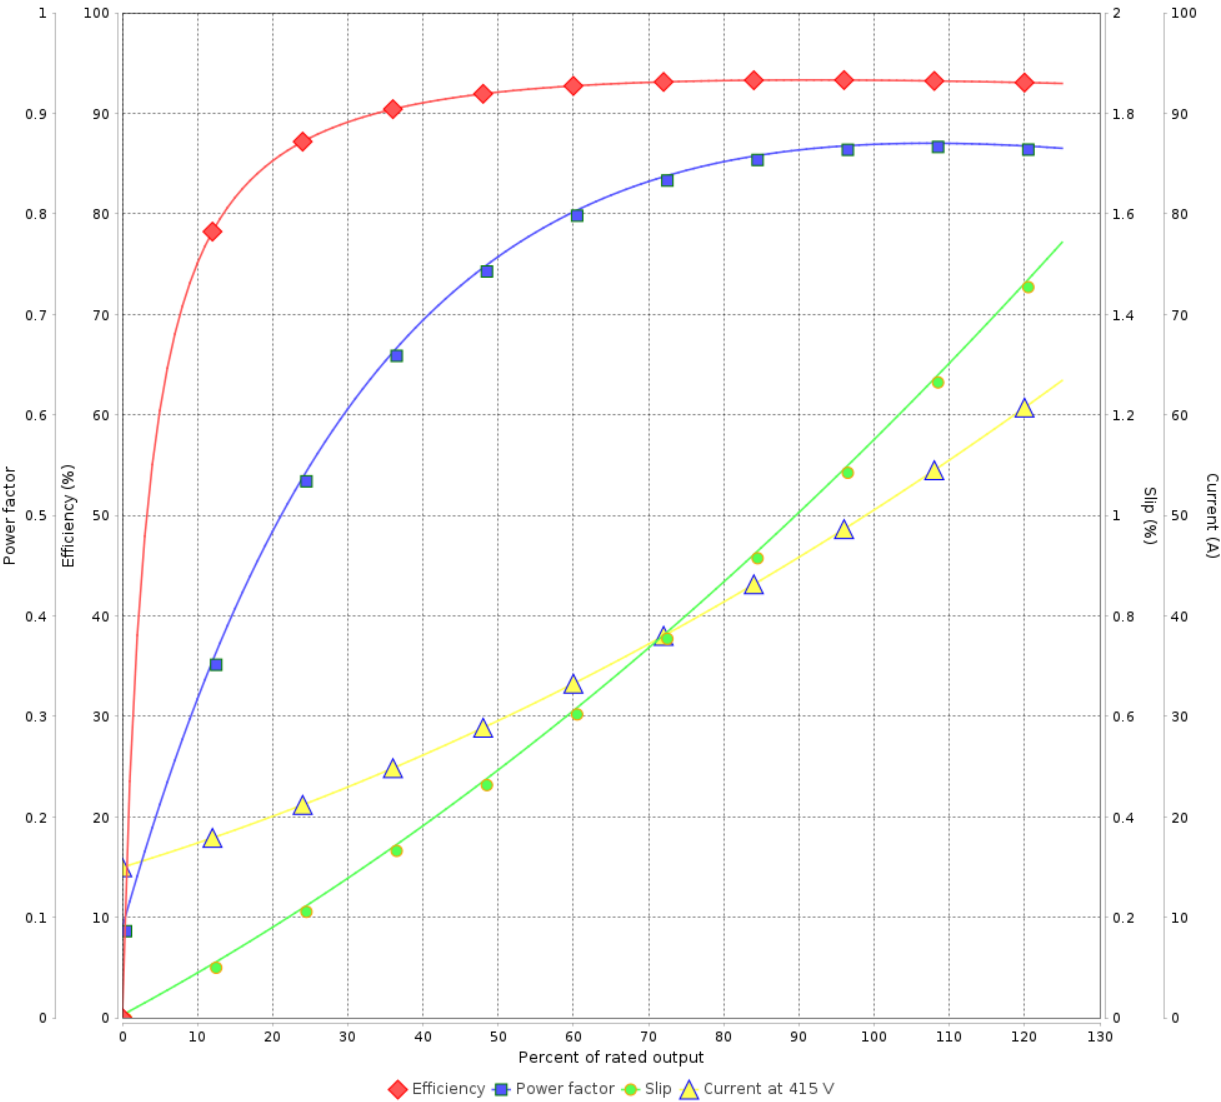

Performance : 415 V 50 Hz 2P IE3			
Rated current	: 51.4 A	Moment of inertia (J)	: 0.2422 kgm²
LRC	: 7.2	Duty cycle	: Cont.(S1)
Rated torque	: 9.79 kgfm	Insulation class	: F
Locked rotor torque	: 280 %	Service factor	: 1.00
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 2965 rpm	Design	: B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 6 / 9	Revision
Checked by					
Date	22/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11943168

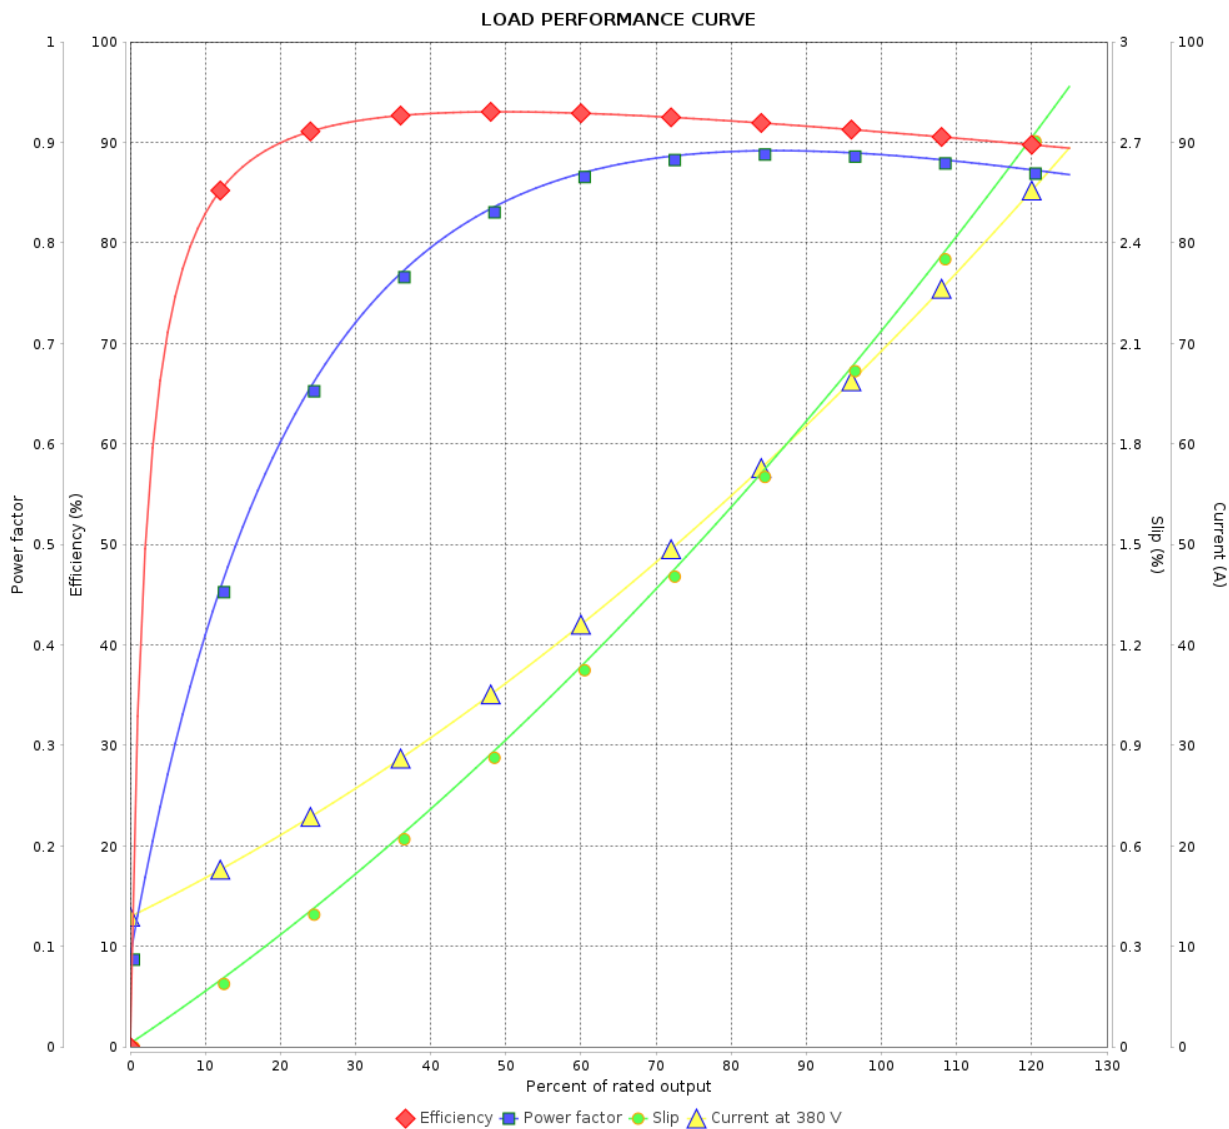

Performance : 380 V 50 Hz 2P

Rated current : 69.4 A
LRC : 5.2
Rated torque : 12.4 kgfm
Locked rotor torque : 190 %
Breakdown torque : 200 %
Rated speed : 2935 rpm

Moment of inertia (J) : 0.2422 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 7 / 9	Revision
Checked by					
Date	22/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11943168

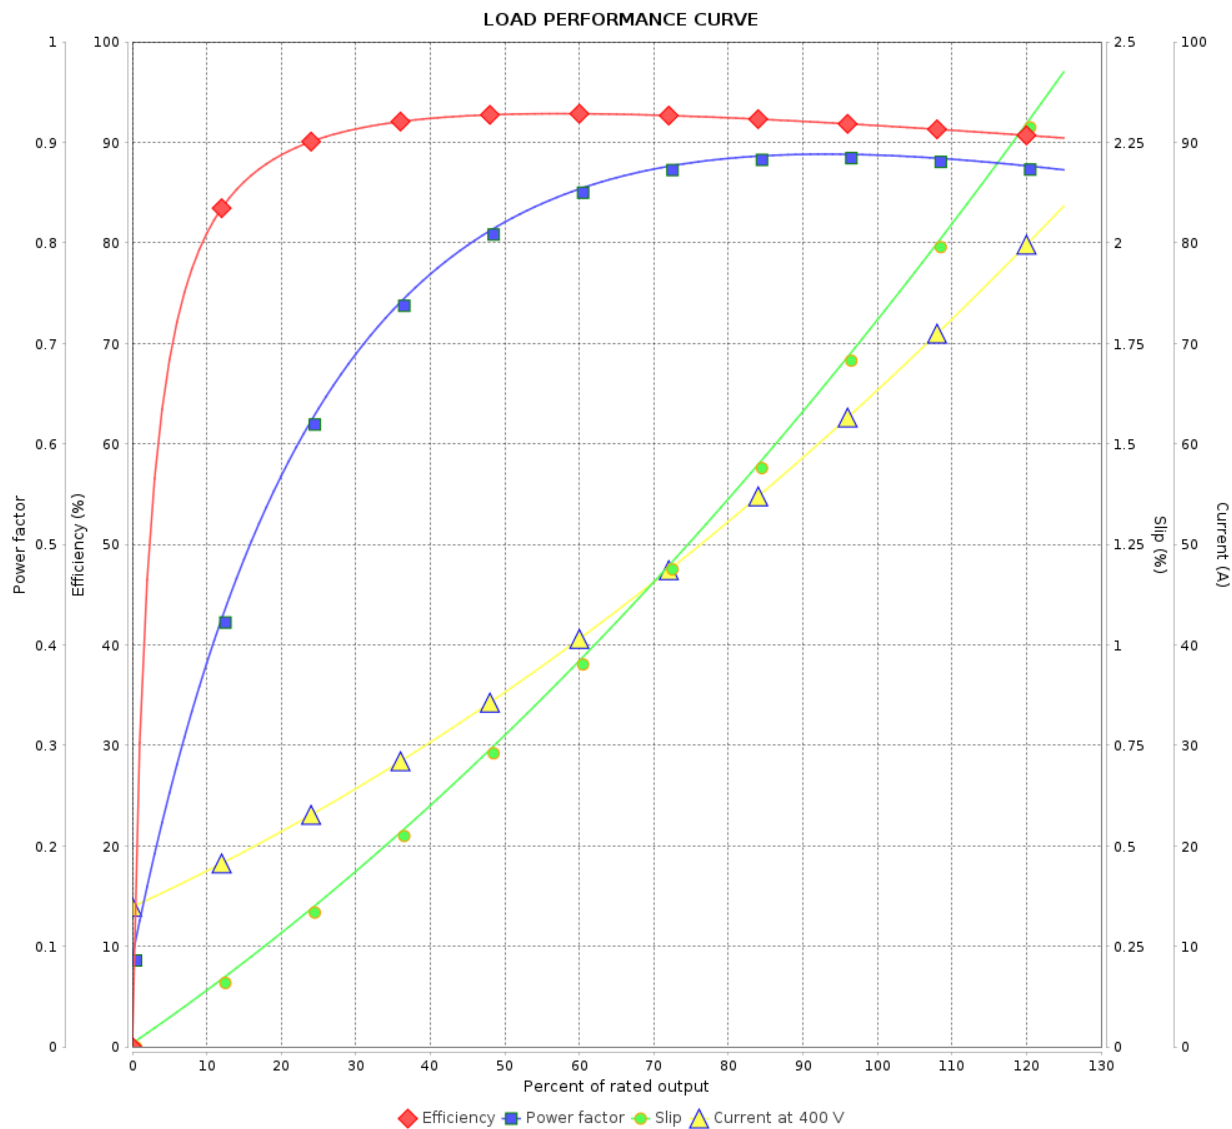

Performance : 400 V 50 Hz 2P IE1

Rated current : 65.4 A
LRC : 5.6
Rated torque : 12.3 kgfm
Locked rotor torque : 210 %
Breakdown torque : 200 %
Rated speed : 2945 rpm

Moment of inertia (J) : 0.2422 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				8 / 9	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11943168

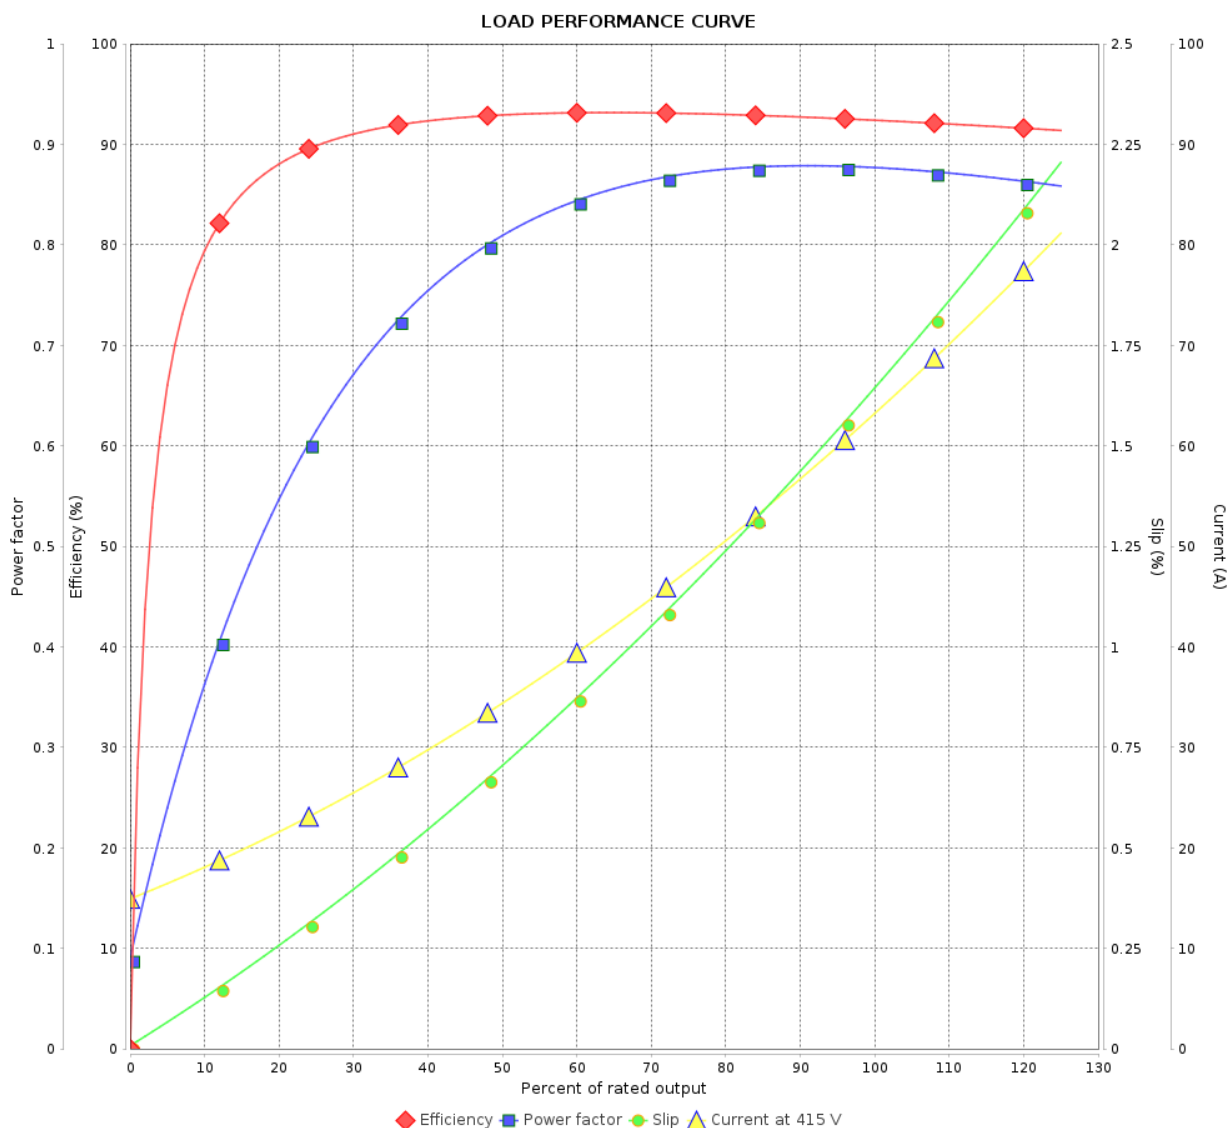

Performance : 415 V 50 Hz 2P IE1

Rated current : 63.3 A
LRC : 6.2
Rated torque : 12.3 kgfm
Locked rotor torque : 229 %
Breakdown torque : 220 %
Rated speed : 2950 rpm

Moment of inertia (J) : 0.2422 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 9 / 9Revision		
Checked by				
Date	22/10/2024			