

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : General Single-Phase Product code : 10023063

| | | | |
|-----------------------|---------------------------|-----------------------------|-----------------------|
| Frame | : D56 | Locked rotor time | : 10s (cold) 6s (hot) |
| Output | : 1 HP (0.75 kW) | Temperature rise | : 80 K |
| Poles | : 2 | Duty cycle | : Cont.(S1) |
| Frequency | : 60 Hz | Ambient temperature | : -20°C to +40°C |
| Rated voltage | : 115/208-230 V | Altitude | : 1000 m.a.s.l. |
| Rated current | : 12.8/6.40-6.40 A | Protection degree | : IP55 |
| L. R. Amperes | : 89.6/44.8-44.8 A | Cooling method | : IC411 - TEFC |
| LRC | : 7.0x(Code M) | Mounting | : F-1 |
| No load current | : 9.00/3.88-4.50 A | Rotation ¹ | : Both (CW and CCW) |
| Rated speed | : 3500 rpm | Starting method | : Direct On Line |
| Slip | : 2.78 % | Approx. weight ³ | : 14.2 kg |
| Rated torque | : 0.207 kgfm | | |
| Locked rotor torque | : 320 % | | |
| Breakdown torque | : 280 % | | |
| Insulation class | : B | | |
| Service factor | : 1.15 | | |
| Moment of inertia (J) | : 0.0022 kgm ² | | |

| | | | | | |
|----------------|------|------|------|------------------|----------|
| Output | 50% | 75% | 100% | Foundation loads | |
| Efficiency (%) | 55.0 | 63.0 | 67.0 | Max. traction | : 11 kgf |
| Power Factor | 0.56 | 0.67 | 0.75 | Max. compression | : 25 kgf |

| | | | |
|----------------------|---|------------------|----------------------|
| | | <u>Drive end</u> | <u>Non drive end</u> |
| Bearing type | : | 6204 ZZ | 6202 ZZ |
| Sealing | : | V'Ring | V'Ring |
| Lubrication interval | : | - | - |
| Lubricant amount | : | - | - |
| Lubricant type | : | Mobil Polyrex EM | |

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

| Rev. | Changes Summary | | Performed | Checked | Date |
|--------------|-----------------|-------|-----------|----------|------|
| | | | | | |
| Performed by | | | | | |
| Checked by | | | | | |
| Date | 26/10/2024 | | | | |
| | | Page | | Revision | |
| | | 1 / 2 | | | |

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : General Single-Phase

Product code : 10023063

LOAD PERFORMANCE CURVE

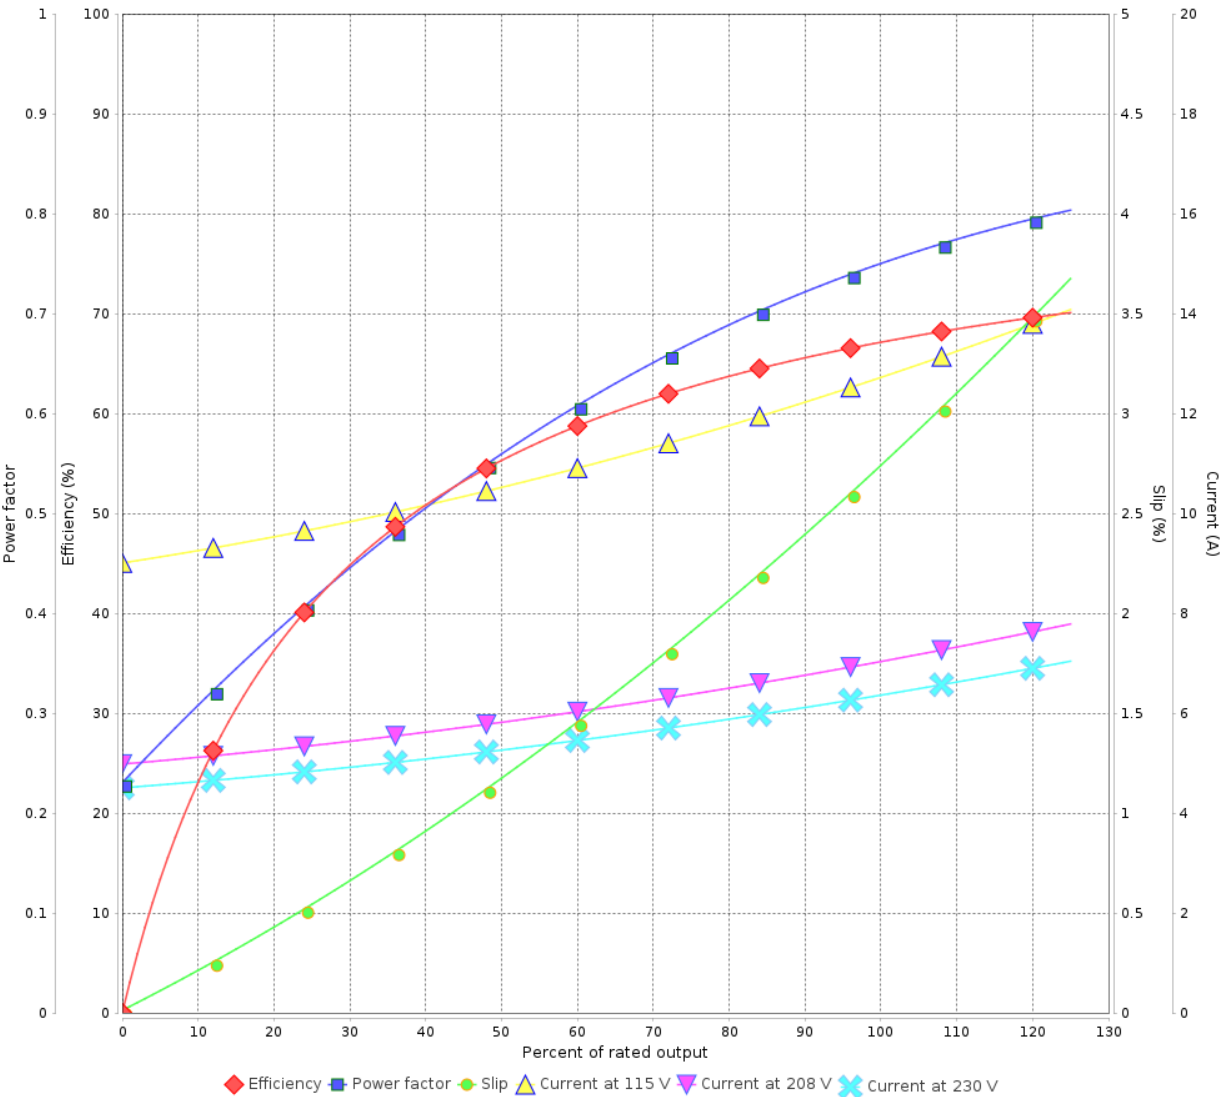

Performance : 115/208-230 V 60 Hz 2P

Rated current : 12.8/6.40-6.40 A
LRC : 7.0
Rated torque : 0.207 kgfm
Locked rotor torque : 320 %
Breakdown torque : 280 %
Rated speed : 3500 rpm

Moment of inertia (J) : 0.0022 kgm²
Duty cycle : Cont.(S1)
Insulation class : B
Service factor :
Temperature rise : 80 K

| Rev. | Changes Summary | | Performed | Checked | Date |
|--------------|-----------------|--|-----------|---------|----------|
| | | | | | |
| Performed by | | | | Page | Revision |
| Checked by | | | | 2 / 2 | |
| Date | | | | | |