

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Explosion Proof Standard Efficiency Three-Phase Product code : 10668199

Frame	: B56EX	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 0.650 A	Protection degree	: IP44
L. R. Amperes	: 4.42 A	Cooling method	: IC411 - TEFC
LRC	: 6.8x(Code K)	Mounting	: F-1
No load current	: 0.500 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1755 rpm	Noise level <sup>2</sup>	: 50.0 dB(A)
Slip	: 2.50 %	Starting method	: Direct On Line
Rated torque	: 0.207 kgfm	Approx. weight <sup>3</sup>	: 14.9 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 330 %		
Insulation class	: B		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0034 kgm <sup>2</sup>		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	70.0	75.5	77.5	Max. traction	: 14 kgf
Power Factor	0.52	0.64	0.73	Max. compression	: 29 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 ZZ	6203 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by					
Date	26/10/2024				
				1 / 3	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

### Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	130 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	26/10/2024		2 / 3	


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Standard Efficiency Three-Phase Product code : 10668199

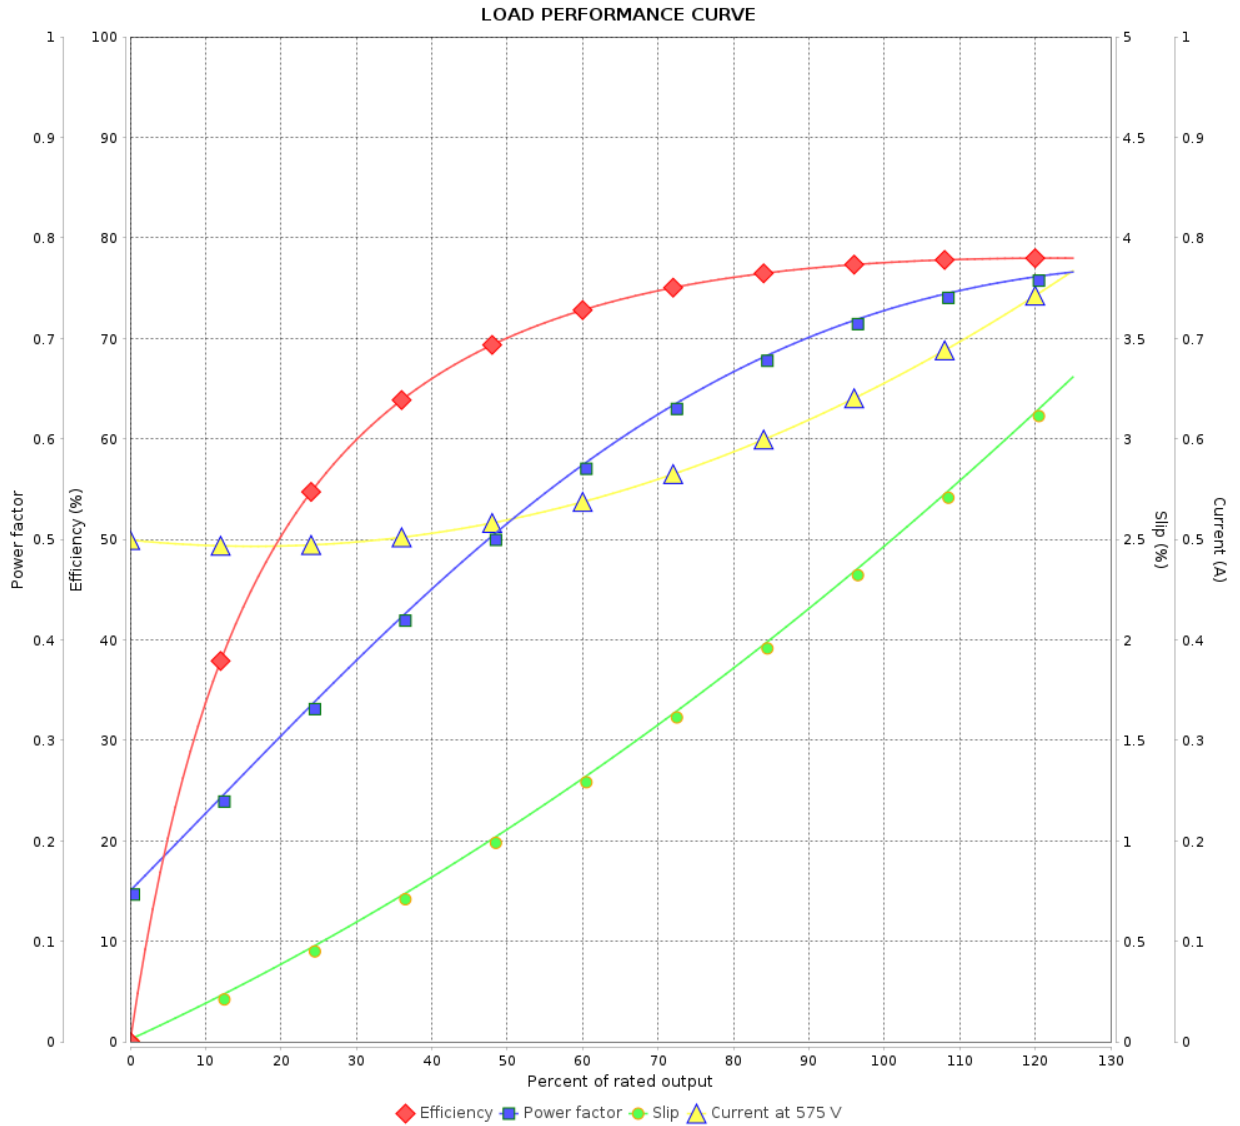

Performance : 575 V 60 Hz 4P

Rated current : 0.650 A  
 LRC : 6.8  
 Rated torque : 0.207 kgfm  
 Locked rotor torque : 220 %  
 Breakdown torque : 330 %  
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0034 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : B  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				