

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA Premium Efficiency Three-Phase Product code : 14477125

Frame	: 182/4TC	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 62.5 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0156 kgm <sup>2</sup>
Design	: B		

Output [HP]	5	5	5	5
Poles	4	4	4	4
Frequency [Hz]	60	50	50	50
Rated voltage [V]	230/460	380	400	415
Rated current [A]	13.1/6.57	7.83	7.54	7.45
L. R. Amperes [A]	93.3/46.6	47.8	51.3	53.6
LRC [A]	7.1x(Code J)	6.1x(Code G)	6.8x(Code J)	7.2x(Code J)
No load current [A]	6.20/3.10	3.10	3.40	3.80
Rated speed [RPM]	1750	1435	1440	1445
Slip [%]	2.78	4.33	4.00	3.67
Rated torque [kgfm]	2.07	2.53	2.52	2.51
Locked rotor torque [%]	229	210	229	250
Breakdown torque [%]	300	229	260	290
Service factor	1.15	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K
Locked rotor time	43s (cold) 24s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	34s (cold) 19s (hot)
Noise level <sup>2</sup>	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)
Efficiency (%)	25%			
	50%	86.5	86.0	86.5
	75%	88.5	86.5	87.0
	100%	89.5	86.5	87.5
Power Factor	25%			
	50%	0.59	0.67	0.59
	75%	0.71	0.77	0.72
	100%	0.79	0.83	0.79

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads	
Bearing type	: 6307 2RS	6206 2RS	Max. traction	: 121 kgf
Sealing	: Oil Seal	Lip Seal	Max. compression	: 184 kgf
Lubrication interval	: -	-		
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			

Notes  
USABLE @208V 14.5A SF 1.15 SFA 16.7A

This revision replaces and cancel the previous one, which must be eliminated.  
(1) Looking the motor from the shaft end.  
(2) Measured at 1m and with tolerance of +3dB(A).  
(3) Approximate weight subject to changes after manufacturing process.  
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	28/10/2024			

Page 1 / 6  
Revision

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 6	
Date	28/10/2024				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA  
Premium Efficiency Three-Phase

Product code : 14477125

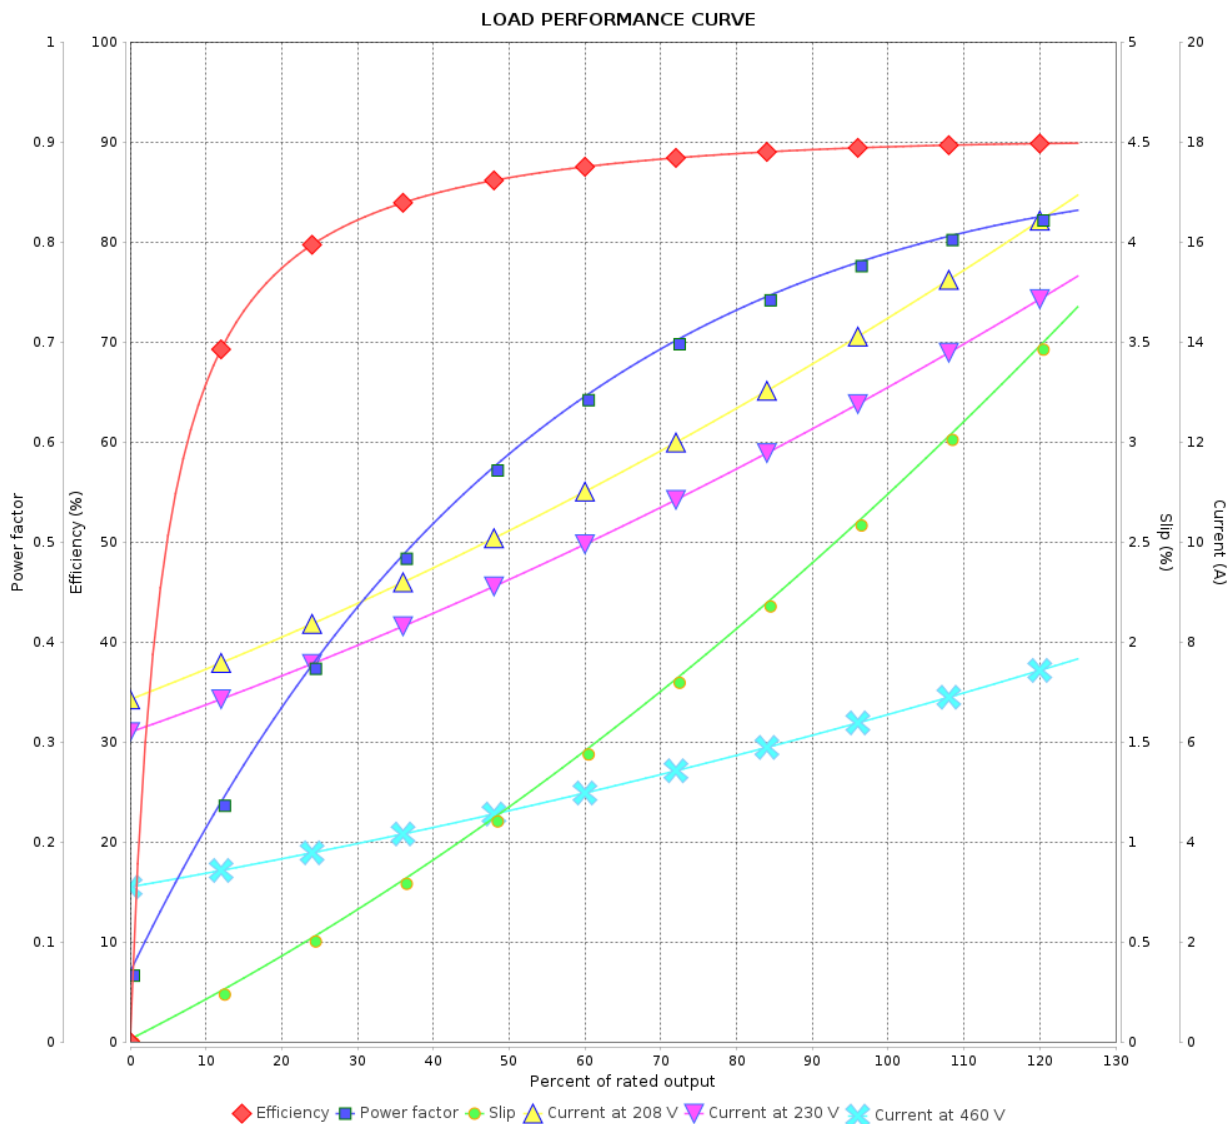

Performance : 230/460 V 60 Hz 4P

Rated current : 13.1/6.57 A  
LRC : 7.1  
Rated torque : 2.07 kgfm  
Locked rotor torque : 229 %  
Breakdown torque : 300 %  
Rated speed : 1750 rpm

Moment of inertia (J) : 0.0156 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 3 / 6	Revision
Checked by					
Date	28/10/2024				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA  
Premium Efficiency Three-Phase

Product code : 14477125

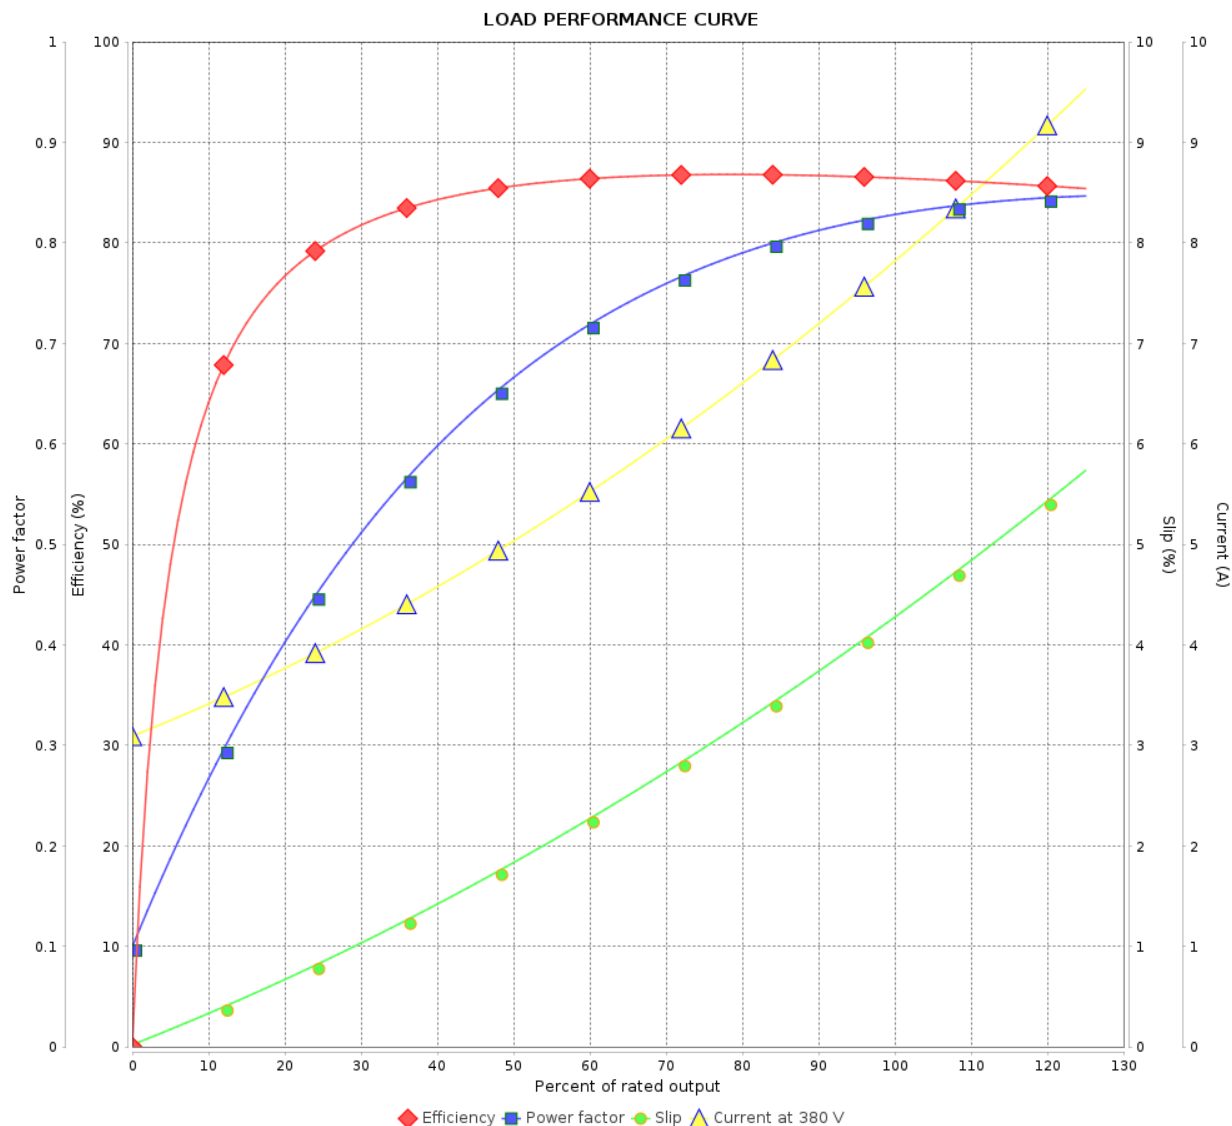

Performance : 380 V 50 Hz 4P IE2


Rated current : 7.83 A  
LRC : 6.1  
Rated torque : 2.53 kgfm  
Locked rotor torque : 210 %  
Breakdown torque : 229 %  
Rated speed : 1435 rpm

Moment of inertia (J) : 0.0156 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.00  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 6	
Date					

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA  
Premium Efficiency Three-Phase

Product code : 14477125

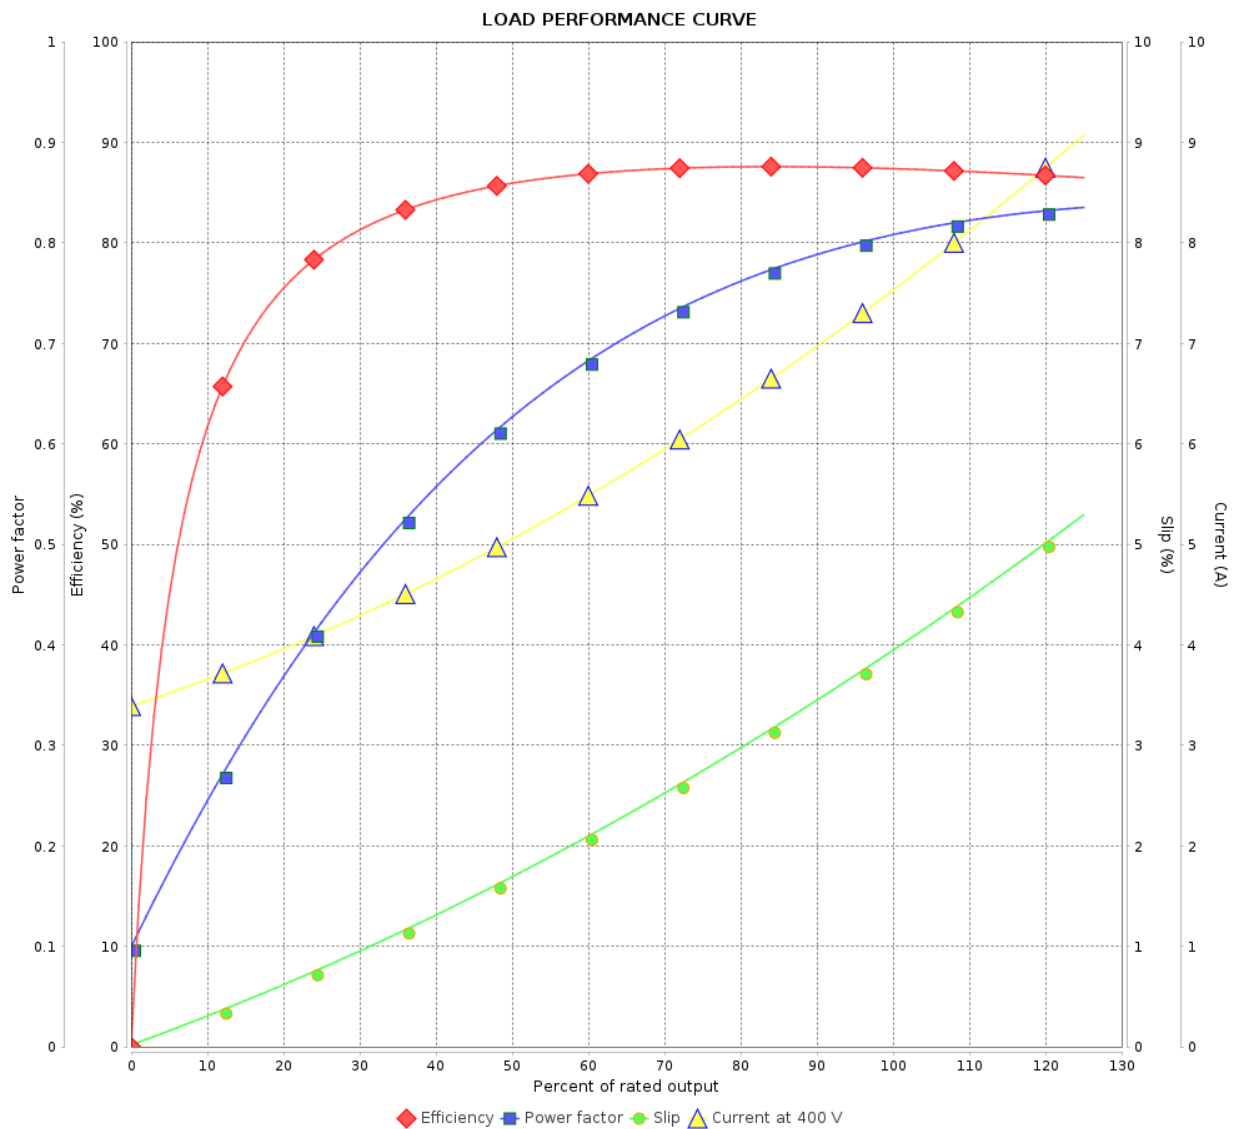

Performance : 400 V 50 Hz 4P IE2

Rated current : 7.54 A  
LRC : 6.8  
Rated torque : 2.52 kgfm  
Locked rotor torque : 229 %  
Breakdown torque : 260 %  
Rated speed : 1440 rpm

Moment of inertia (J) : 0.0156 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.00  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 5 / 6Revision		
Checked by				
Date	28/10/2024			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA  
Premium Efficiency Three-Phase

Product code : 14477125

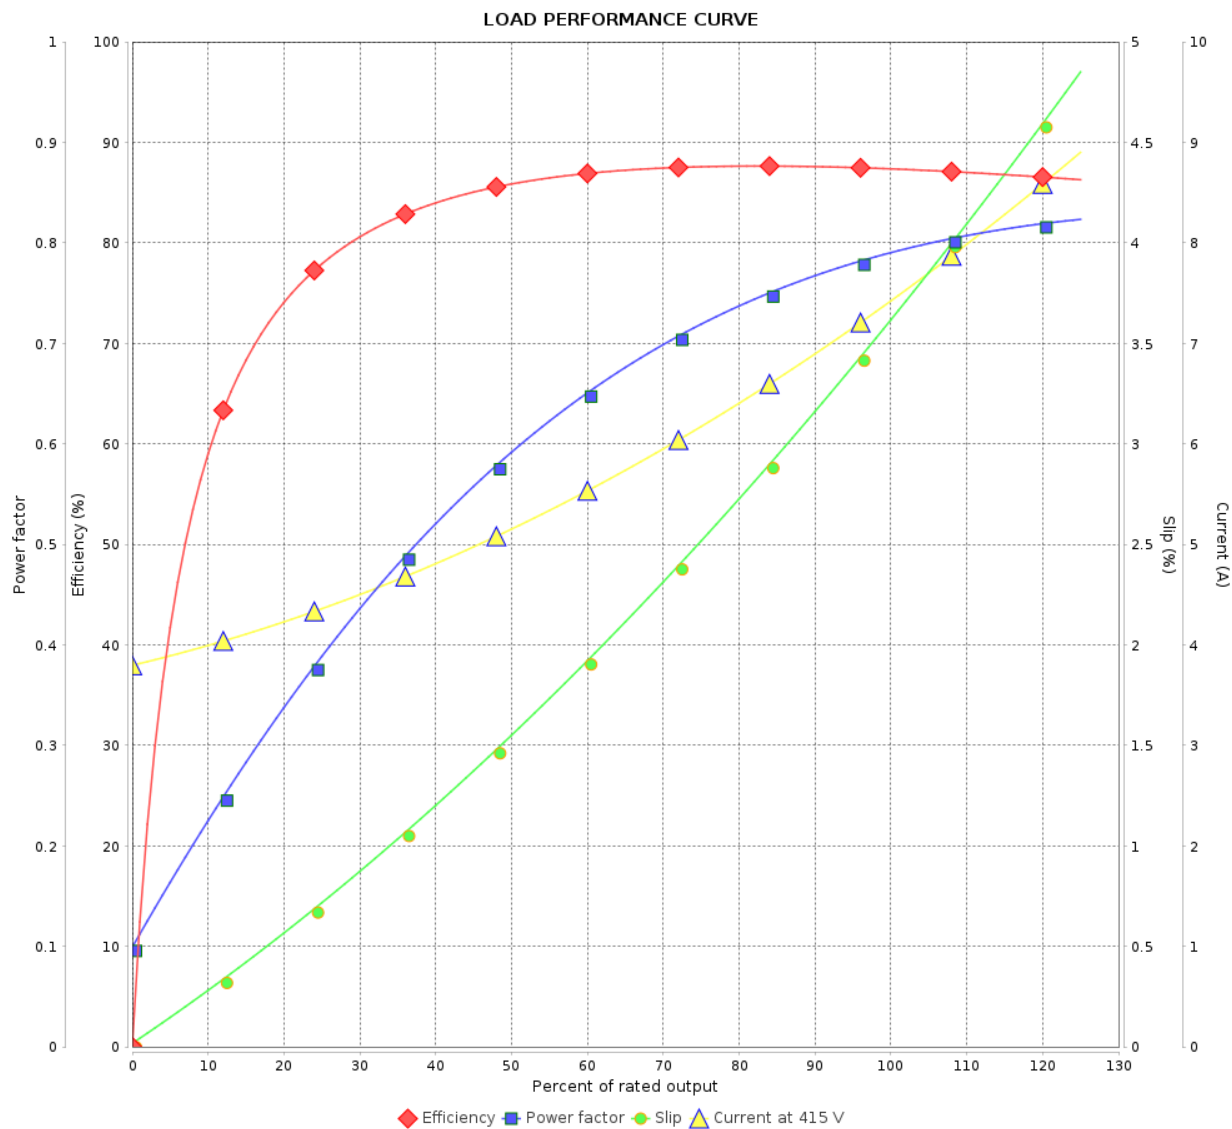

Performance : 415 V 50 Hz 4P IE2

Rated current : 7.45 A  
LRC : 7.2  
Rated torque : 2.51 kgfm  
Locked rotor torque : 250 %  
Breakdown torque : 290 %  
Rated speed : 1445 rpm

Moment of inertia (J) : 0.0156 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.00  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 6 / 6	Revision
Checked by					
Date	28/10/2024				