

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA Premium Efficiency Three-Phase Product code : 14756753

Frame	: 286T	Locked rotor time	: 66s (cold) 37s (hot)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 8	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 15.2 A	Protection degree	: IP55
L. R. Amperes	: 92.7 A	Cooling method	: IC411 - TEFC
LRC	: 6.1x(Code G)	Mounting	: F-1
No load current	: 6.50 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 880 rpm	Noise level <sup>2</sup>	: 54.0 dB(A)
Slip	: 2.22 %	Starting method	: Direct On Line
Rated torque	: 12.4 kgfm	Approx. weight <sup>3</sup>	: 230 kg
Locked rotor torque	: 240 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.3448 kgm <sup>2</sup>		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	91.0	91.7	91.0	Max. traction	: 292 kgf
Power Factor	0.00	0.66	0.76	0.80	Max. compression	: 522 kgf

		Drive end	Non drive end
Bearing type	:	6311 C3	6211 C3
Sealing	:	Oil Seal	Lip Seal
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	18 g	11 g
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 3 Revision		
Checked by				
Date	29/10/2024			

Customer :

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 3	
Date	29/10/2024				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA  
Premium Efficiency Three-Phase

Product code : 14756753

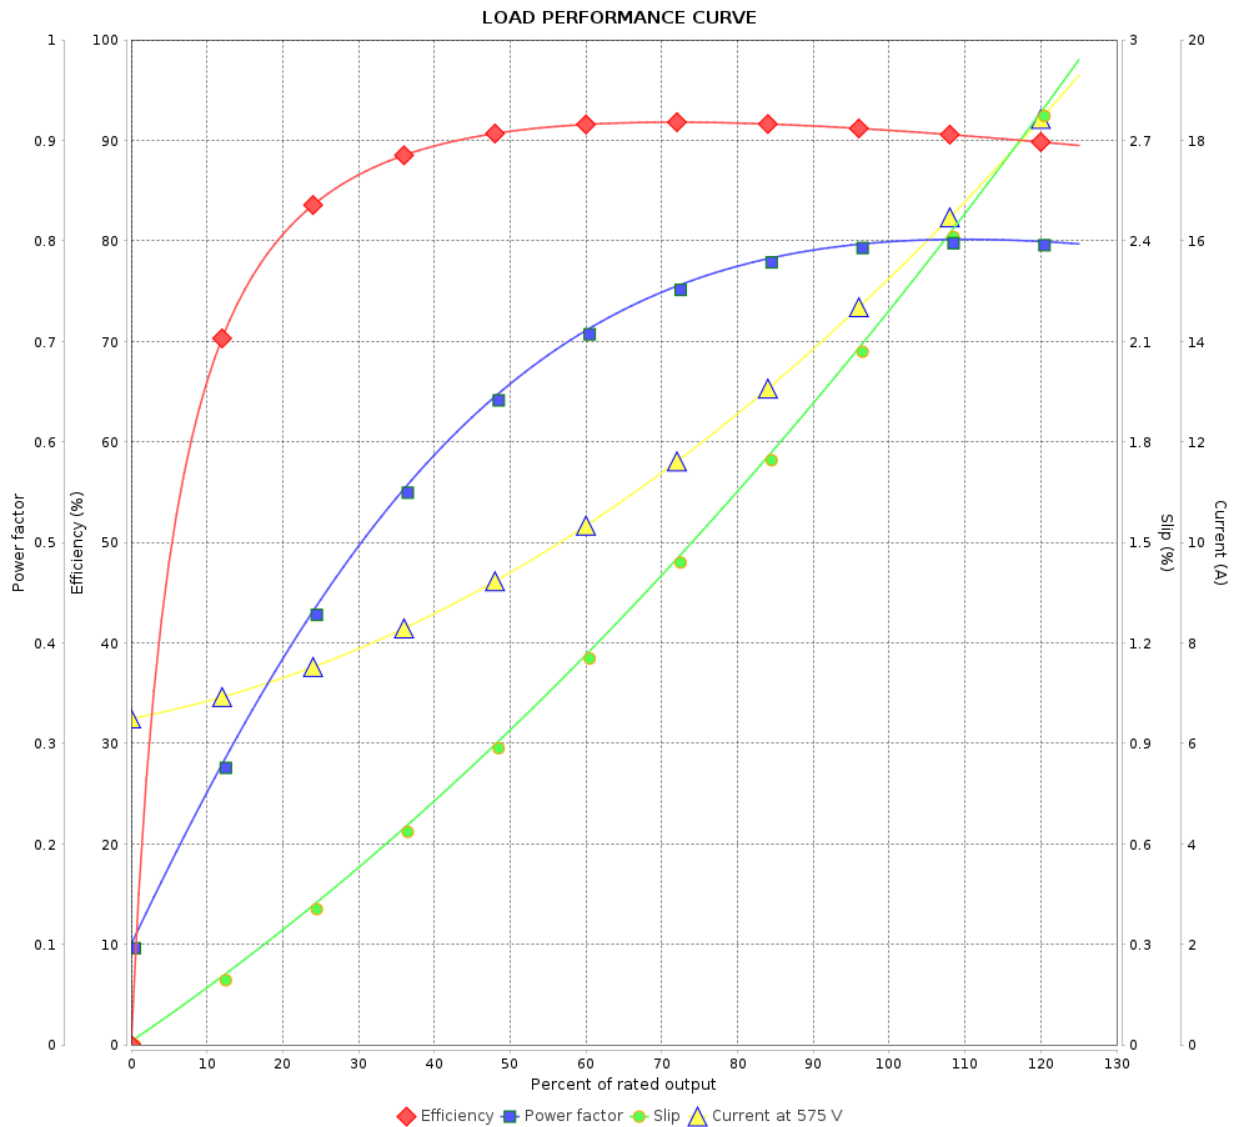

Performance : 575 V 60 Hz 8P

Rated current	: 15.2 A	Moment of inertia (J)	: 0.3448 kgm <sup>2</sup>
LRC	: 6.1	Duty cycle	: Cont.(S1)
Rated torque	: 12.4 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 880 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 3 Revision		
Checked by				
Date	29/10/2024			