

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Single-Phase

Product code : 15201739

Frame	: 143/5T	Locked rotor time	: 18s (cold) 10s (hot)
Output	: 1.5 HP (1.1 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 13.6/7.30-6.80 A	Protection degree	: IP55
L. R. Amperes	: 99.3/53.3-49.6 A	Cooling method	: IC411 - TEFC
LRC	: 7.3x(Code J)	Mounting	: F-1
No load current	: 3.80/1.64-1.90 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3520 rpm	Noise level ²	: 69.0 dB(A)
Slip	: 2.22 %	Starting method	: Direct On Line
Rated torque	: 0.309 kgfm	Approx. weight ³	: 26.5 kg
Locked rotor torque	: 229 %		
Breakdown torque	: 240 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0020 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	67.0	72.0	74.0	Max. traction	: 8 kgf
Power Factor	0.91	0.94	0.95	Max. compression	: 34 kgf

	Drive end	Non drive end
Bearing type	: 6205 ZZ	: 6203 ZZ
Sealing	: V'Ring	: V'Ring
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	29/10/2024			

Page 1 / 2
Revision

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Single-Phase Product code : 15201739

LOAD PERFORMANCE CURVE

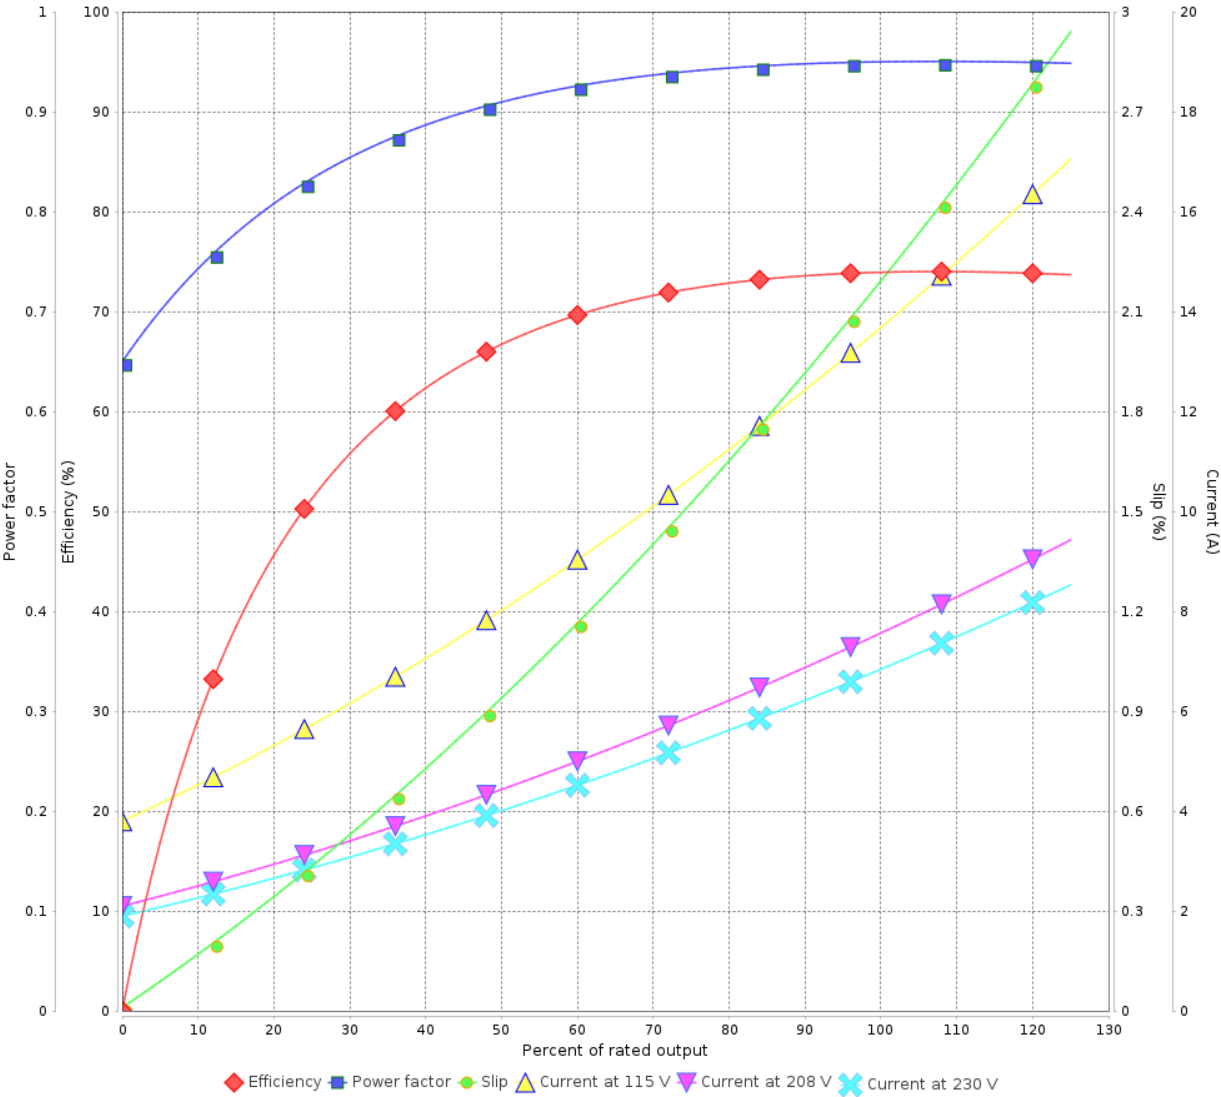

Performance : 115/208-230 V 60 Hz 2P			
Rated current	: 13.6/7.30-6.80 A	Moment of inertia (J)	: 0.0020 kgm ²
LRC	: 7.3	Duty cycle	: Cont.(S1)
Rated torque	: 0.309 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	:
Breakdown torque	: 240 %	Temperature rise	: 80 K
Rated speed	: 3520 rpm		

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	29/10/2024				