

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11606759

Frame	: 254/6TC	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 138 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0647 kgm ²
Design	: B		

Output [HP]	20	15	15	15	20	20	20
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	46.5/23.3	20.6	19.8	19.3	28.9	27.2	26.2
L. R. Amperes [A]	284/142	144	154	156	148	155	160
LRC [A]	6.1x(Code G)	7.0x(Code H)	7.8x(Code J)	8.1x(Code J)	5.1x(Code E)	5.7x(Code F)	6.1x(Code G)
No load current [A]	11.2/5.60	5.50	6.00	6.10	5.50	6.00	6.10
Rated speed [RPM]	3530	2940	2945	2950	2885	2905	2915
Slip [%]	1.94	2.00	1.83	1.67	3.83	3.17	2.83
Rated torque [kgfm]	4.12	3.70	3.70	3.69	5.03	5.00	4.98
Locked rotor torque [%]	200	220	240	270	160	180	200
Breakdown torque [%]	240	260	280	310	200	210	229
Service factor	1.25	1.15	1.15	1.15	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	25s (cold) 14s (hot)	28s (cold) 16s (hot)	28s (cold) 16s (hot)	28s (cold) 16s (hot)	10s (cold) 6s (hot)	16s (cold) 9s (hot)	18s (cold) 10s (hot)
Noise level ²	72.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)
Efficiency (%)	25%	0.000					
	50%	90.7	90.6	90.4	89.8	87.2	89.2
	75%	91.0	90.9	91.2	91.1	87.5	89.5
	100%	91.0	91.2	91.2	91.2	87.5	89.5
Power Factor	25%	0.00					
	50%	0.79	0.78	0.75	0.73	0.85	0.80
	75%	0.86	0.86	0.84	0.83	0.89	0.87
	100%	0.89	0.89	0.88	0.87	0.90	0.89

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	9.5	9.3	9.3	9.3	13.8	11.3	11.3
	P2 (0,5;1,0)	7.9	7.7	7.7	7.7	11.4	9.4	9.4
	P3 (0,25;1,0)	7.3	7.2	7.2	7.2	10.6	8.7	8.7
	P4 (0,9;0,5)	4.4	4.3	4.3	4.3	6.3	5.2	5.2
	P5 (0,5;0,5)	2.7	2.6	2.6	2.6	3.9	3.2	3.2
	P6 (0,5;0,25)	1.5	1.5	1.5	1.5	2.2	1.8	1.8
	P7 (0,25;0,25)	1.0	0.9	0.9	0.9	1.4	1.1	1.1

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type	: 6309 C3	6209 C3	Max. traction : 111 kgf
Sealing	: V'Ring	V'Ring	Max. compression : 249 kgf
Lubrication interval	: 19000 h	20000 h	
Lubricant amount	: 13 g	9 g	
Lubricant type	: Mobil Polyrex EM		

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	04/11/2024		1 /	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Notes
USABLE @208V 51.3A SF 1.15 SFA 59.0A

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.
---	---

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page		Revision
Checked by					
Date	04/11/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11606759

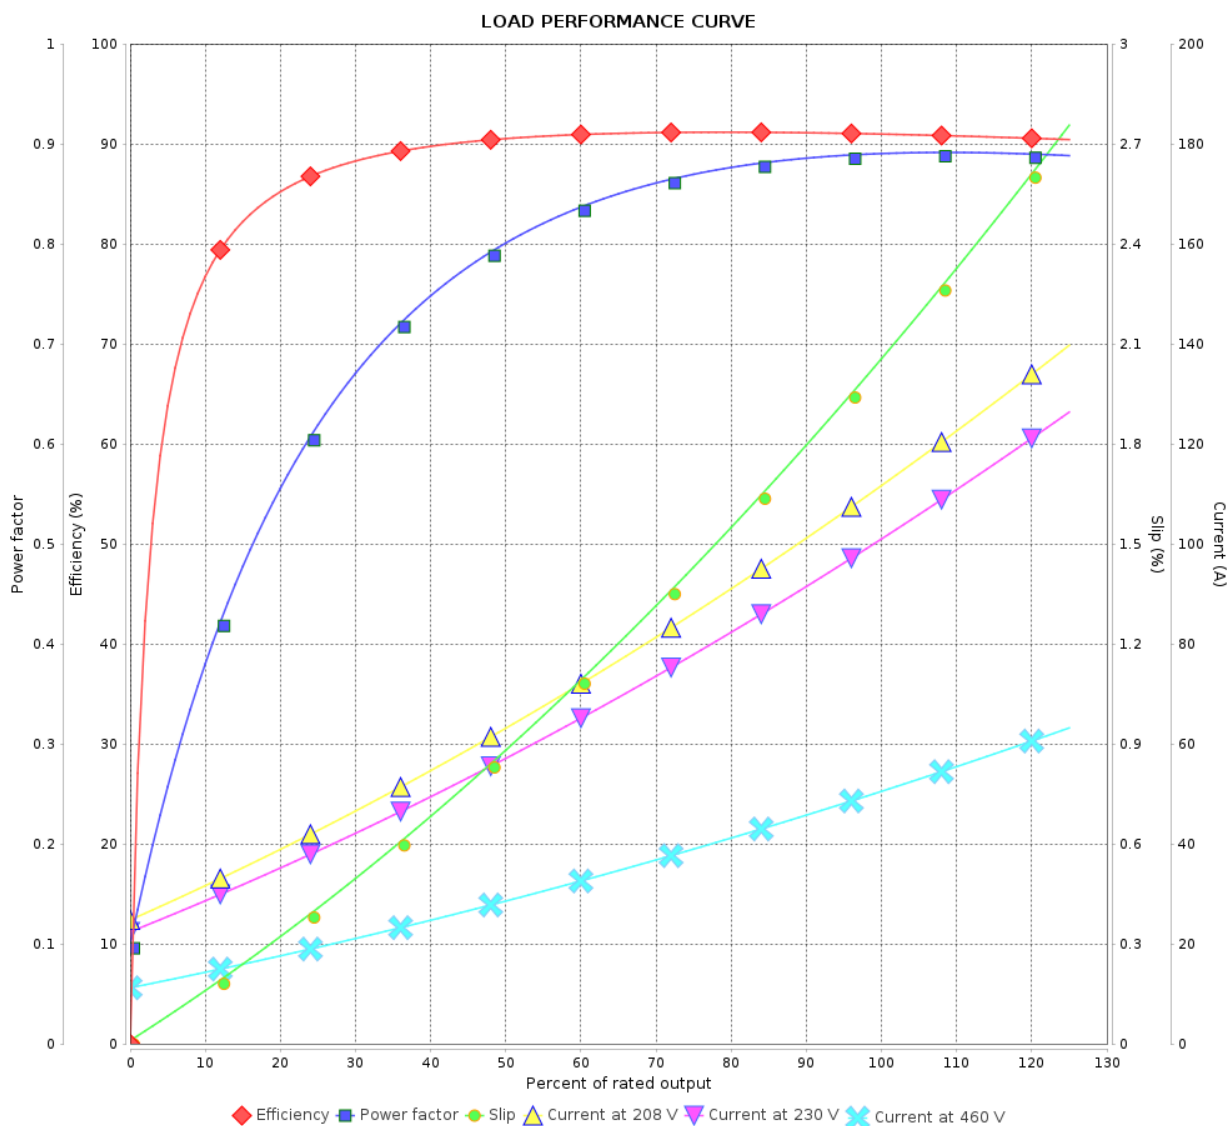

Performance : 230/460 V 60 Hz 2P

Rated current : 46.5/23.3 A
LRC : 6.1
Rated torque : 4.12 kgfm
Locked rotor torque : 200 %
Breakdown torque : 240 %
Rated speed : 3530 rpm

Moment of inertia (J) : 0.0647 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 3 / Revision			
Checked by					
Date	04/11/2024				