

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12447129

Frame : 324/6TC	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 262 kg
Protection degree : IP55	Moment of inertia (J) : 0.3861 kgm ²
Design : B	

Output [HP]	40	30	30	30	40	40	40
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	94.2/47.1	42.8	41.6	41.1	57.4	54.1	52.8
L. R. Amperes [A]	575/287	291	308	316	287	303	317
LRC [A]	6.1x(Code G)	6.8x(Code H)	7.4x(Code J)	7.7x(Code J)	5.0x(Code E)	5.6x(Code F)	6.0x(Code G)
No load current [A]	34.0/17.0	16.8	17.3	18.6	16.8	17.3	18.6
Rated speed [RPM]	1775	1477	1480	1481	1460	1465	1470
Slip [%]	1.39	1.53	1.33	1.27	2.67	2.33	2.00
Rated torque [kgfm]	16.4	14.7	14.7	14.7	19.9	19.8	19.7
Locked rotor torque [%]	229	240	270	280	170	190	210
Breakdown torque [%]	240	260	290	310	180	210	229
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	36s (cold) 20s (hot)	25s (cold) 14s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	25s (cold) 14s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)
Noise level ²	66.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)
Efficiency (%)	25%	0.000			0.000		
	50%	93.6	92.9	92.4	91.7	93.6	93.0
	75%	94.1	93.1	93.0	92.6	93.0	93.0
	100%	94.1	93.0	93.2	93.1	92.4	93.0
Power Factor	25%	0.00			0.00		
	50%	0.72	0.68	0.64	0.62	0.78	0.72
	75%	0.80	0.78	0.75	0.73	0.84	0.80
	100%	0.85	0.84	0.82	0.80	0.86	0.85

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	6.1	6.1	6.1	6.1	6.1	6.1
	P2 (0,5;1,0)	5.1	5.1	5.1	5.1	5.1	5.1
	P3 (0,25;1,0)	5.0	5.0	5.0	5.0	5.0	5.0
	P4 (0,9;0,5)	2.8	2.8	2.8	2.8	2.8	2.8
	P5 (0,5;0,5)	1.9	1.9	1.9	1.9	1.9	1.9
	P6 (0,5;0,25)	1.2	1.2	1.2	1.2	1.2	1.2
	P7 (0,25;0,25)	0.8	0.8	0.8	0.8	0.8	0.8

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type :	6312 C3	6212 C3	Max. traction : 440 kgf
Sealing :	V'Ring	V'Ring	Max. compression : 703 kgf
Lubrication interval :	20000 h	20000 h	
Lubricant amount :	21 g	13 g	
Lubricant type :	Mobil Polyrex EM		

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	19/10/2024			

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Notes
USABLE @208V 104A SF 1.15 SFA 120A

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 9		Revision
Checked by					
Date	19/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12447129

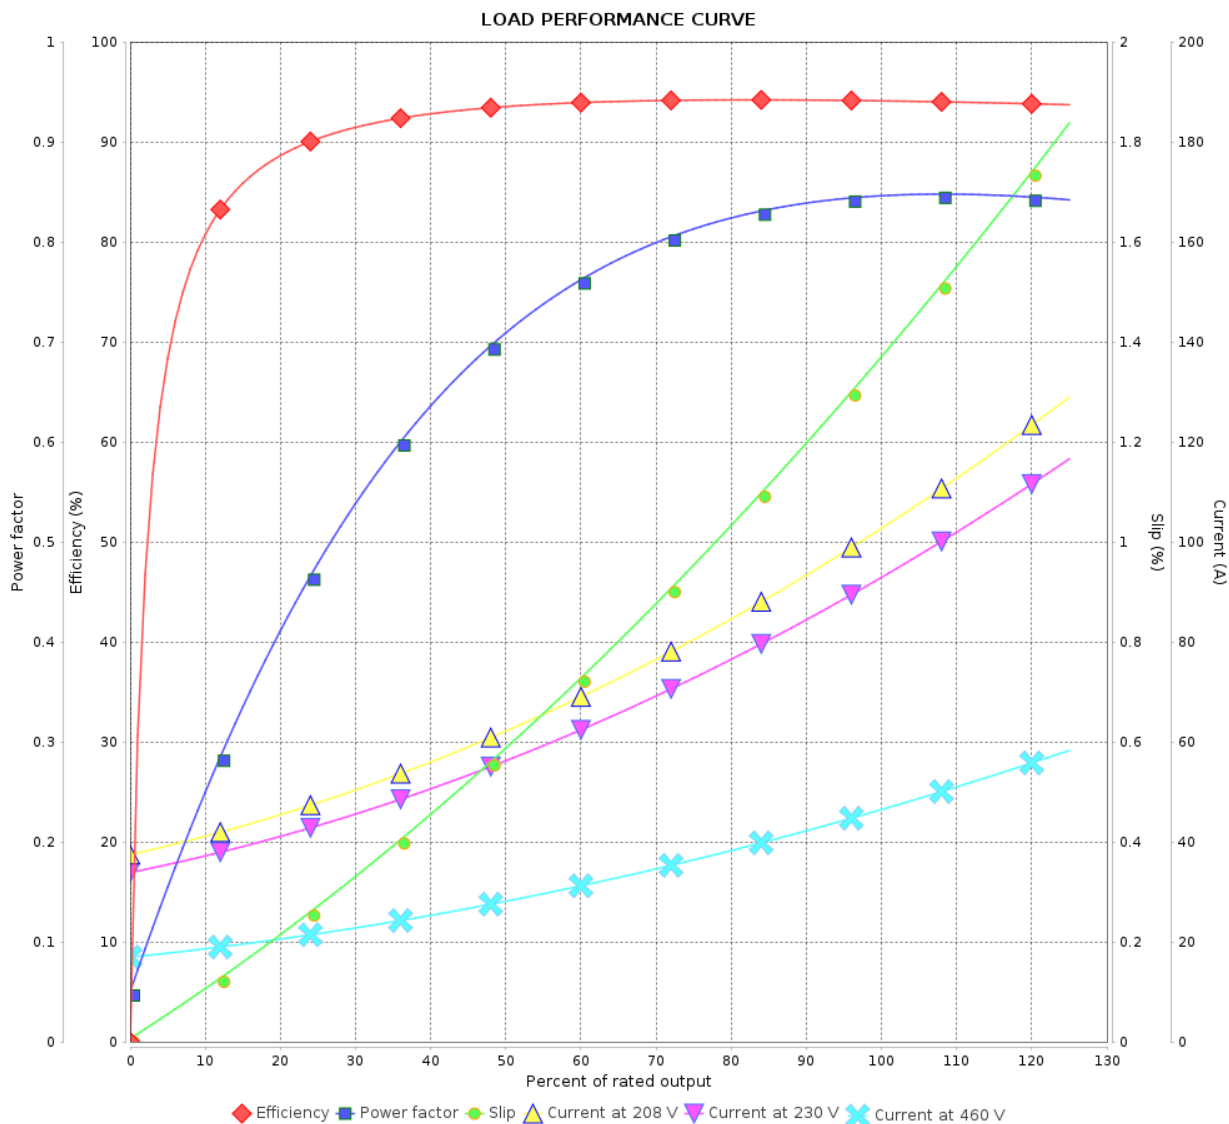

Performance : 230/460 V 60 Hz 4P

Rated current : 94.2/47.1 A
LRC : 6.1
Rated torque : 16.4 kgfm
Locked rotor torque : 229 %
Breakdown torque : 240 %
Rated speed : 1775 rpm

Moment of inertia (J) : 0.3861 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 9Revision		
Checked by				
Date	19/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12447129

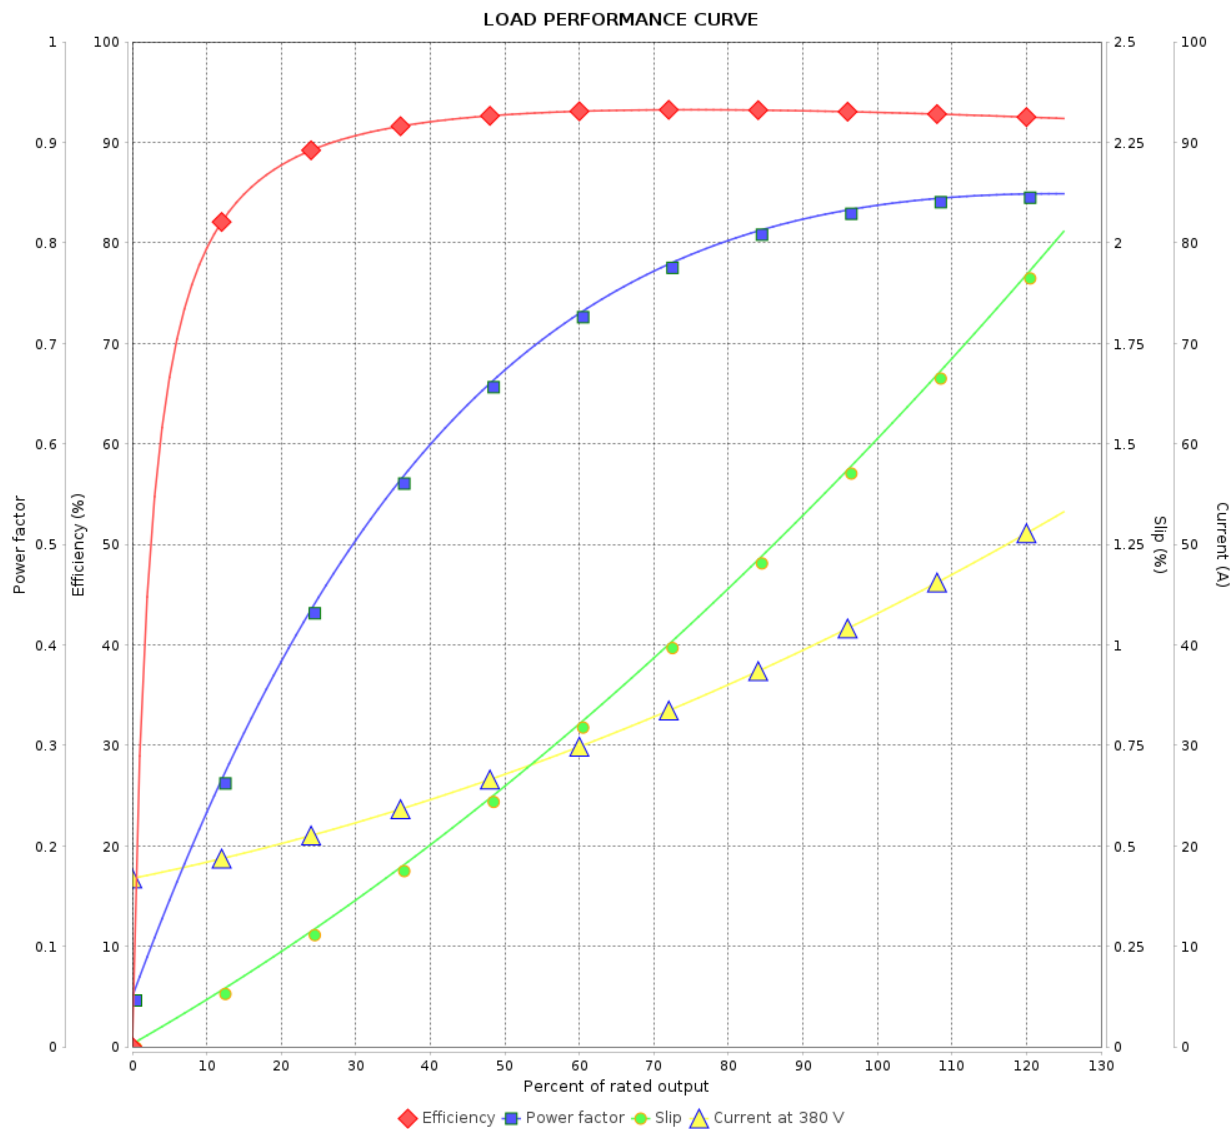

Performance : 380 V 50 Hz 4P IE3

Rated current : 42.8 A
LRC : 6.8
Rated torque : 14.7 kgfm
Locked rotor torque : 240 %
Breakdown torque : 260 %
Rated speed : 1477 rpm

Moment of inertia (J) : 0.3861 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 9	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12447129

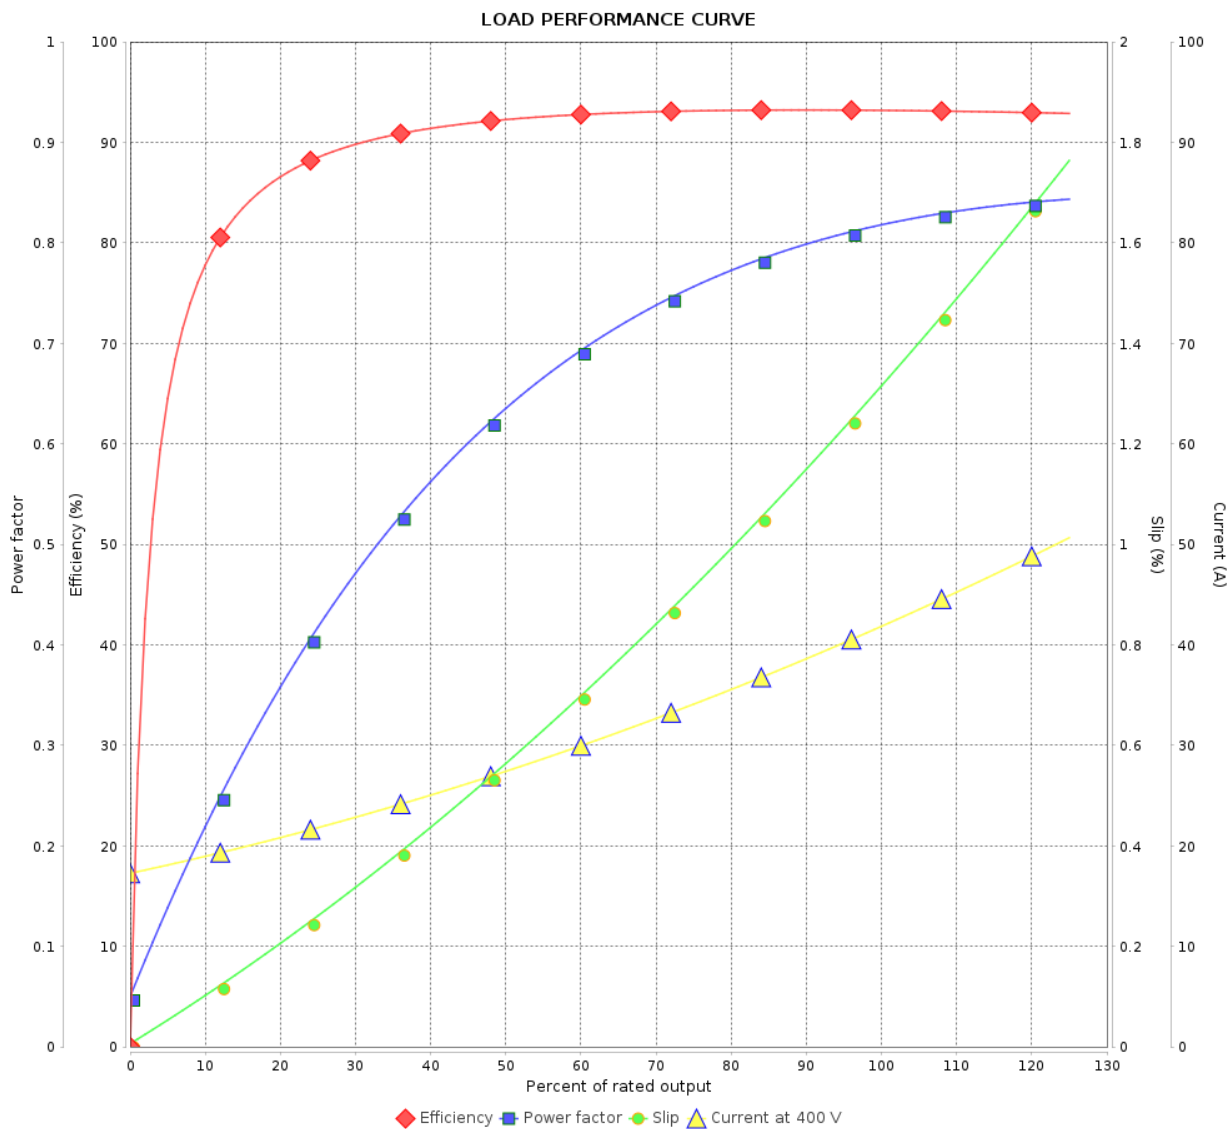

Performance : 400 V 50 Hz 4P IE3

Rated current : 41.6 A
LRC : 7.4
Rated torque : 14.7 kgfm
Locked rotor torque : 270 %
Breakdown torque : 290 %
Rated speed : 1480 rpm

Moment of inertia (J) : 0.3861 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 5 / 9	Revision
Checked by					
Date	19/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12447129

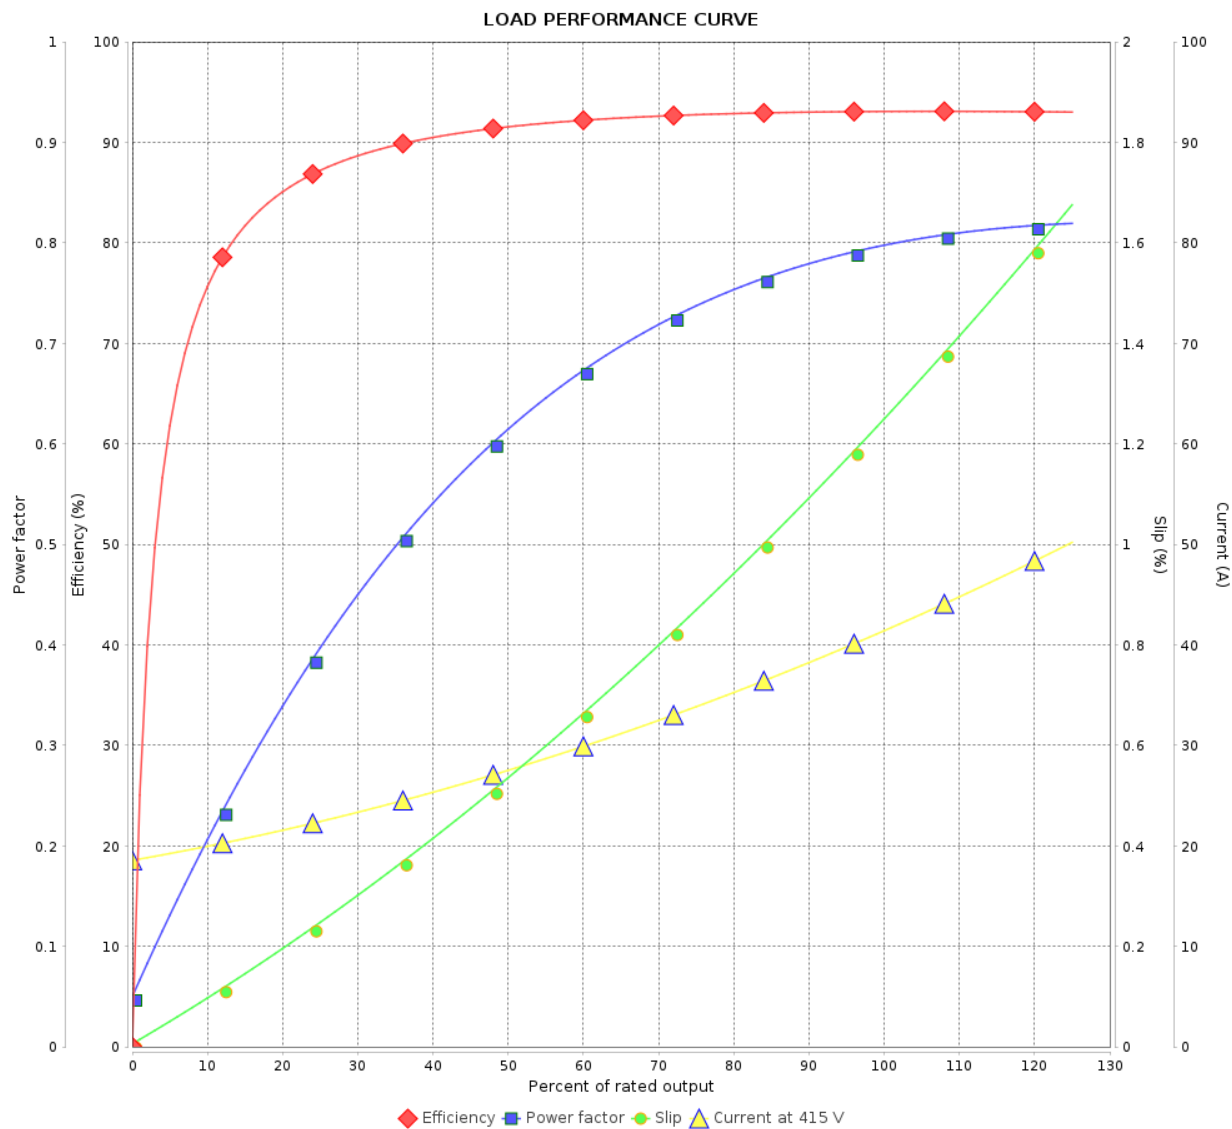

Performance : 415 V 50 Hz 4P IE3

Rated current : 41.1 A
LRC : 7.7
Rated torque : 14.7 kgfm
Locked rotor torque : 280 %
Breakdown torque : 310 %
Rated speed : 1481 rpm

Moment of inertia (J) : 0.3861 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				6 / 9	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12447129

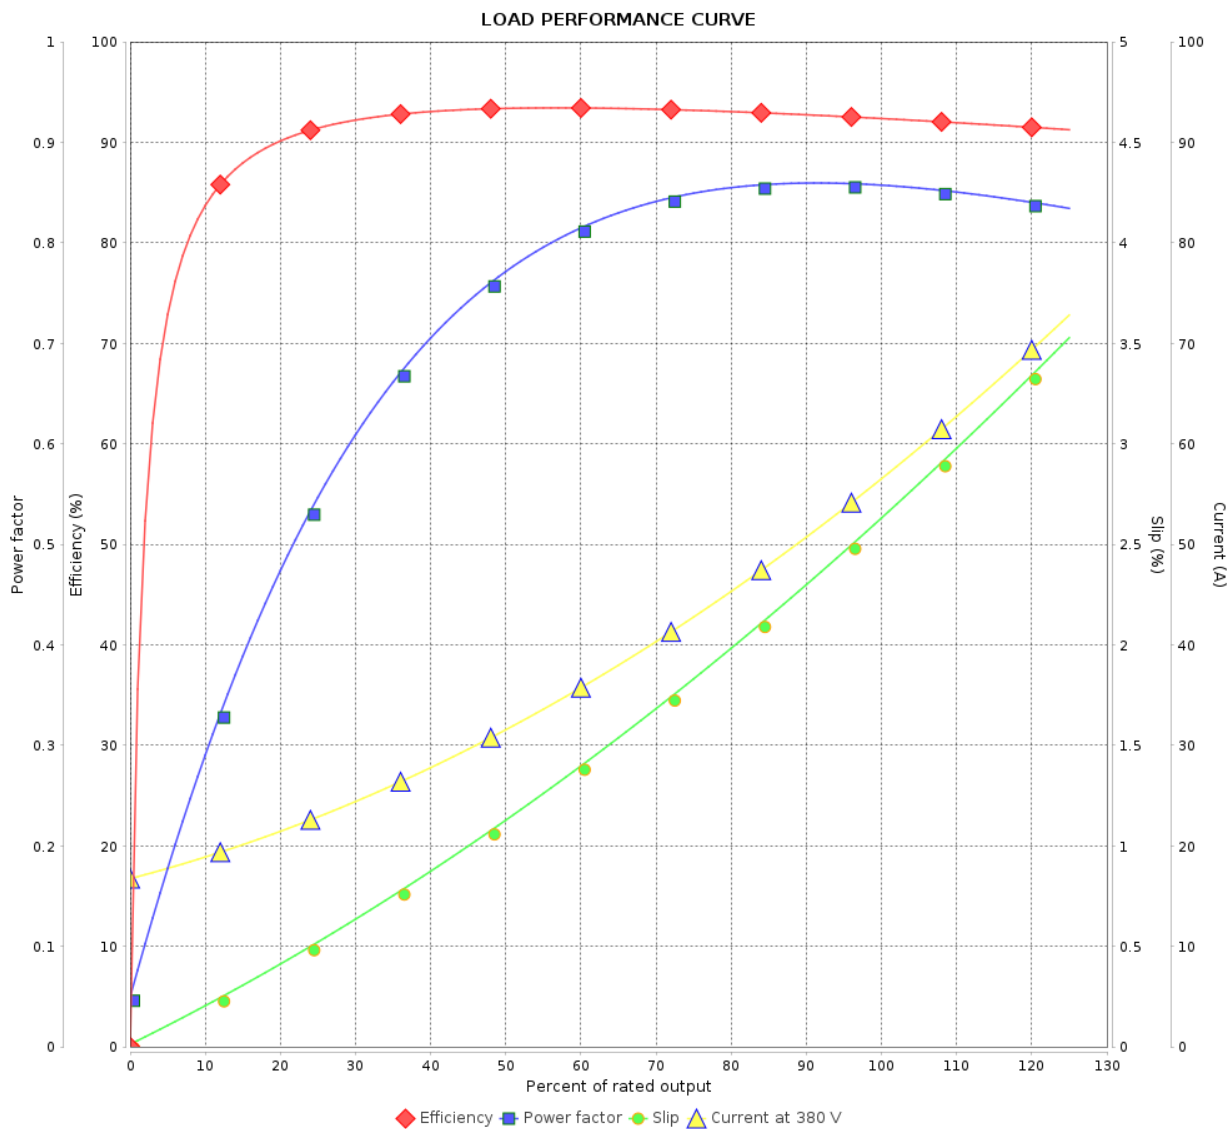

Performance : 380 V 50 Hz 4P IE2

Rated current : 57.4 A
LRC : 5.0
Rated torque : 19.9 kgfm
Locked rotor torque : 170 %
Breakdown torque : 180 %
Rated speed : 1460 rpm

Moment of inertia (J) : 0.3861 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 7 / 9	Revision
Checked by					
Date	19/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12447129

LOAD PERFORMANCE CURVE

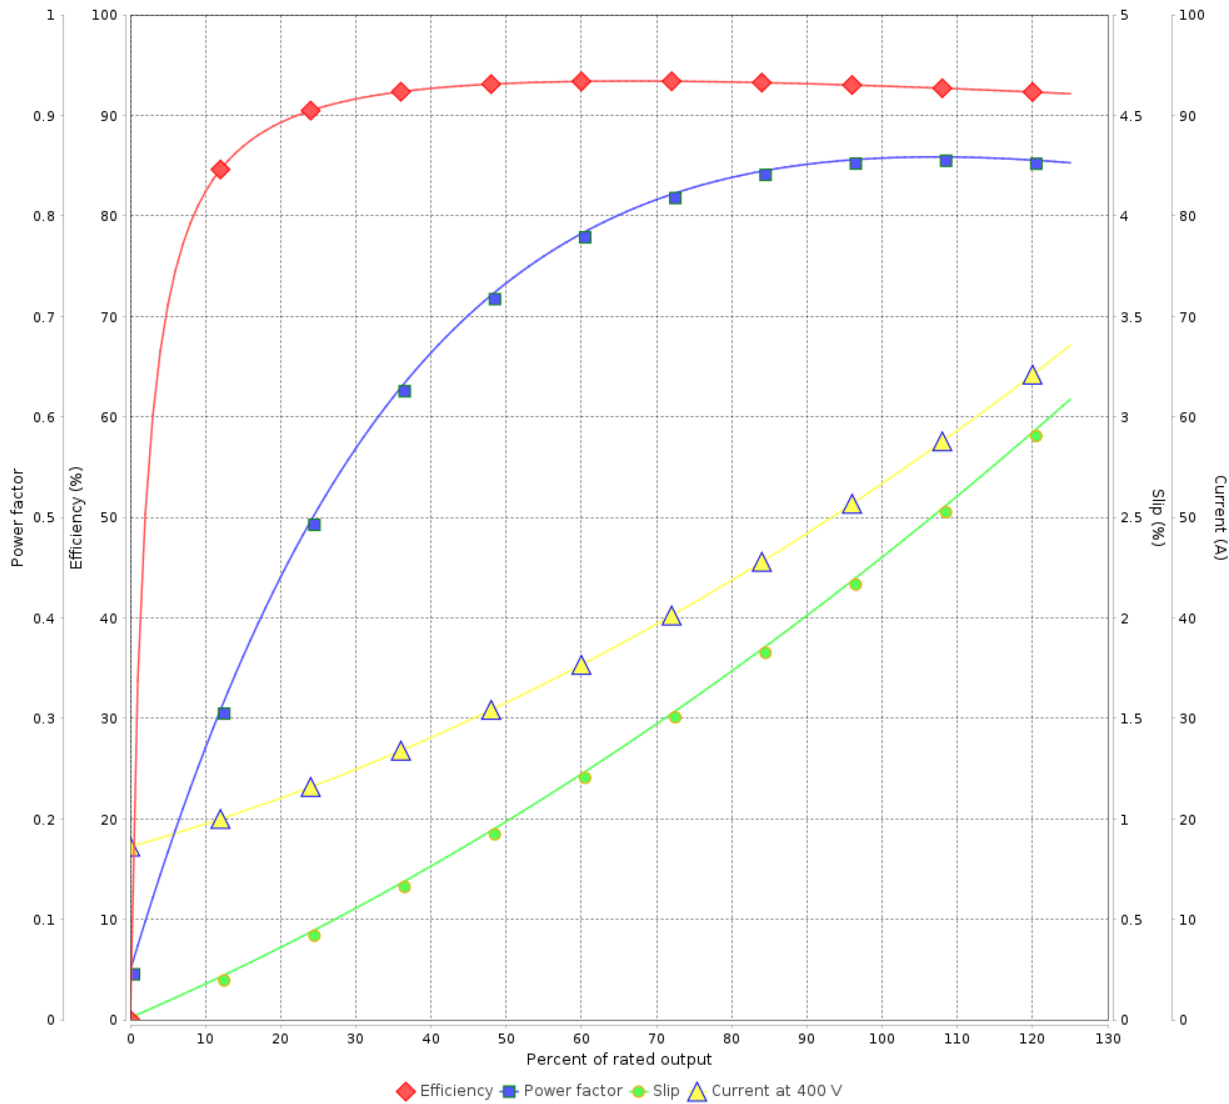

Performance : 400 V 50 Hz 4P IE2			
Rated current	: 54.1 A	Moment of inertia (J)	: 0.3861 kgm ²
LRC	: 5.6	Duty cycle	: Cont.(S1)
Rated torque	: 19.8 kgfm	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 105 K
Rated speed	: 1465 rpm	Design	: B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 8 / 9	Revision
Checked by					
Date	19/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12447129


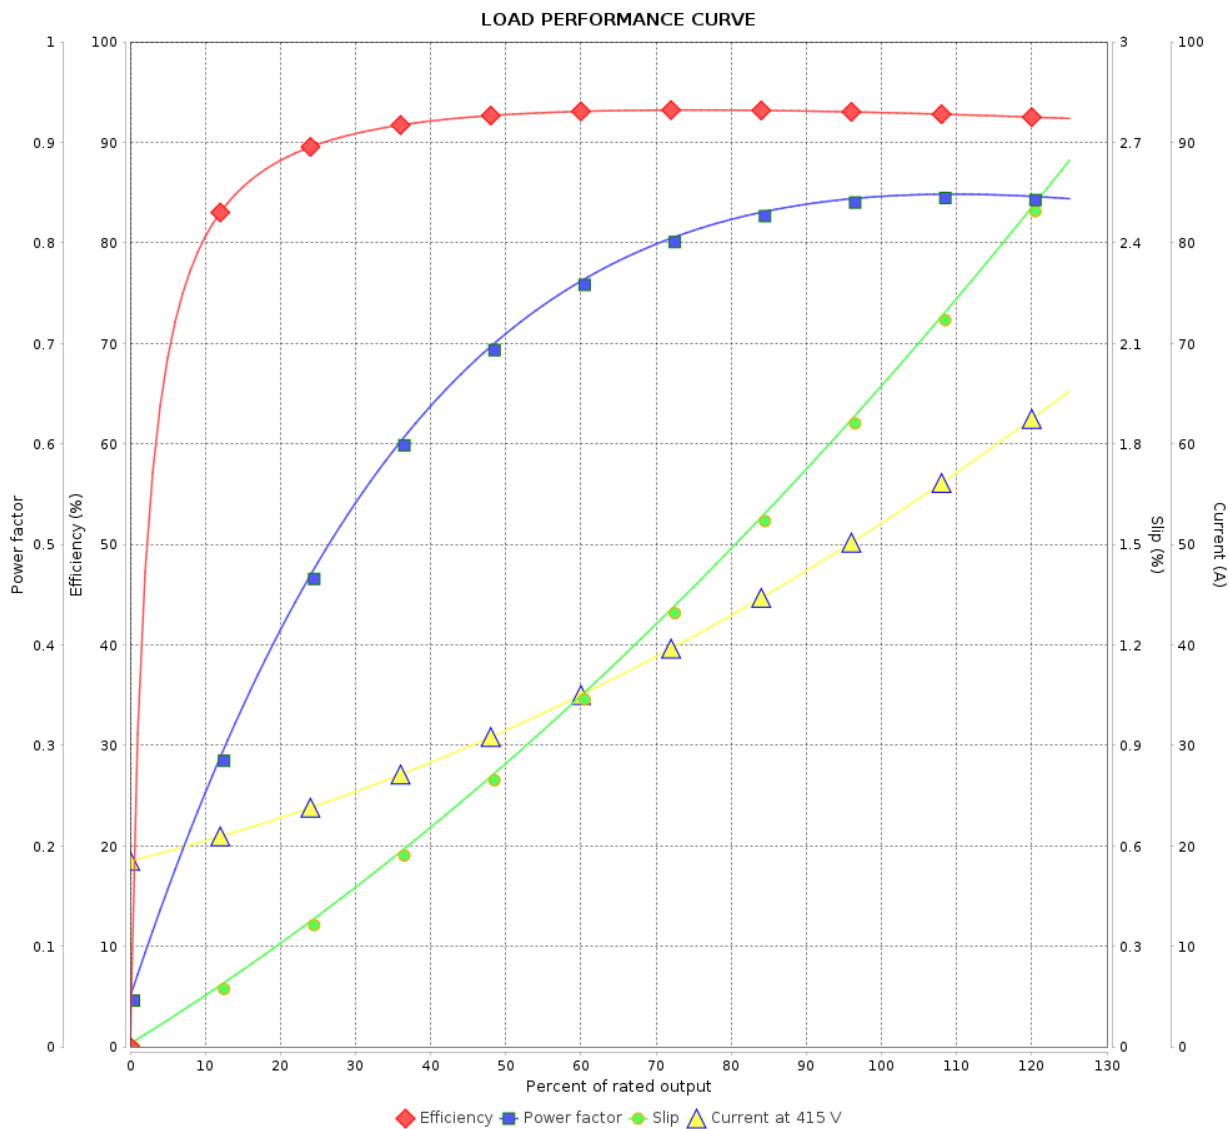



Performance : 415 V 50 Hz 4P IE2

Rated current : 52.8 A
LRC : 6.0
Rated torque : 19.7 kgfm
Locked rotor torque : 210 %
Breakdown torque : 229 %
Rated speed : 1470 rpm

Moment of inertia (J) : 0.3861 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 9 / 9	Revision
Checked by					
Date	19/10/2024				

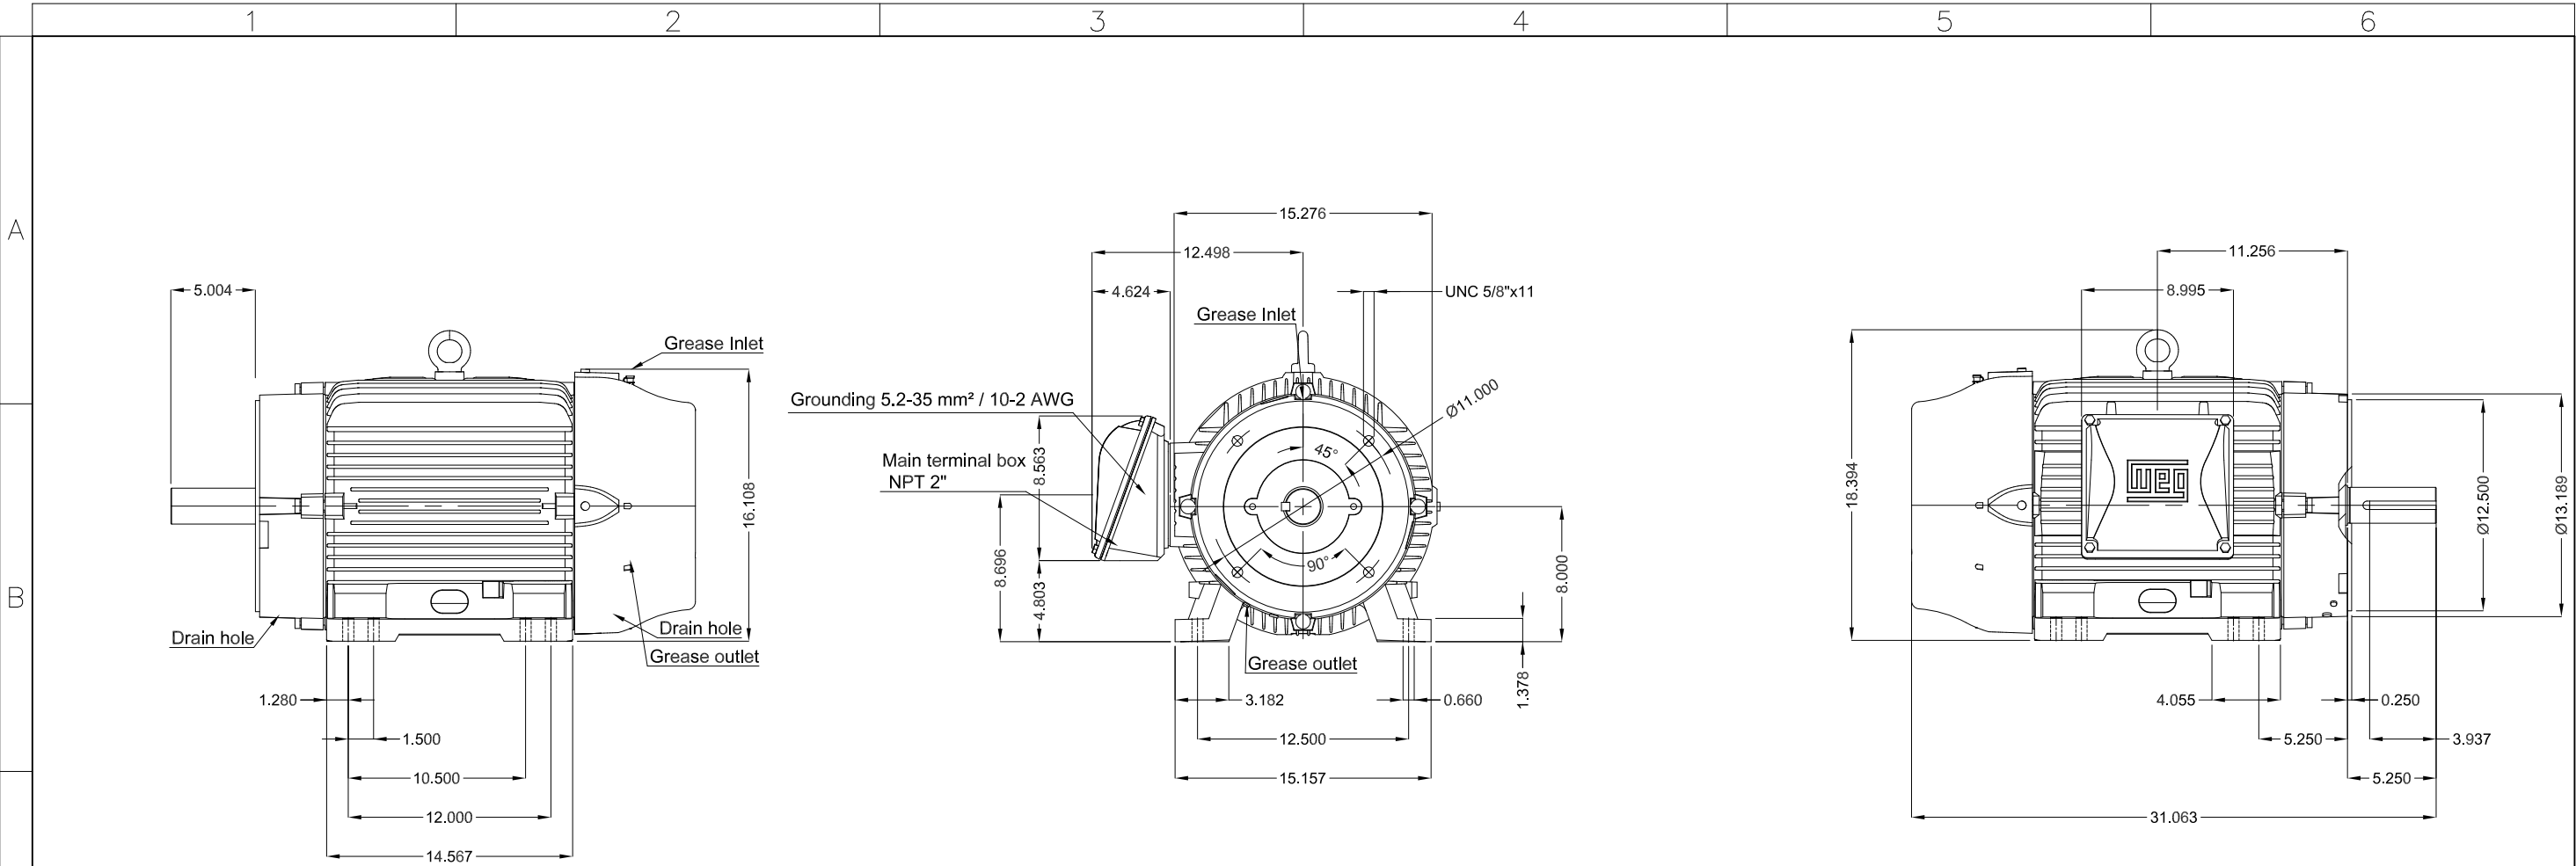

E					40 HP 04 Poles 60 Hz										A			
							HYBRISUSER						00					
	ECM		LOC		SUMMARY OF MODIFICATIONS				EXECUTED		CHECKED		RELEASED		DATE		VER	
	EXECUTED		HYBRISUSER				THREE PH. MOTOR W22 NEMA PREM. EFF. FRAME 324/6TC IP55 TEFC				PREVIEW WDD 00							
	CHECKED																	
	RELEASED																	
	REL. DATE																	
Without vertical jackscrews																		
Color RAL 5009																		
Painting plan 203A																		
Mounting B34R(D)																		

DE Shaft End	
0.500	0.500
2.1250	1.844
2.1240	