

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W22 Brake Motor NEMA Premium Efficiency Three-Phase		Product code :		15511033
Frame	:	213/5TC		Locked rotor time	:	102s (cold) 57s (hot)
Output	:	5 HP (3.7 kW)		Temperature rise	:	80 K
Poles	:	6		Duty cycle	:	Cont.(S1)
Frequency	:	60 Hz		Ambient temperature	:	-20°C to +40°C
Rated voltage	:	575 V		Altitude	:	1000 m.a.s.l.
Rated current	:	5.46 A		Protection degree	:	IP55
L. R. Amperes	:	37.2 A		Cooling method	:	IC411 - TEFC
LRC	:	6.8x(Code J)		Mounting	:	F-1
No load current	:	2.76 A		Rotation ¹	:	Both (CW and CCW)
Rated speed	:	1170 rpm		Noise level ²	:	55.0 dB(A)
Slip	:	2.50 %		Starting method	:	Direct On Line
Rated torque	:	3.10 kgfm		Approx. weight ³	:	92.4 kg
Locked rotor torque	:	170 %				
Breakdown torque	:	260 %				
Insulation class	:	F				
Service factor	:	1.25				
Moment of inertia (J)	:	0.0620 kgm ²				
Design	:	B				
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	88.5	89.5	89.5	Max. traction	:	103 kgf
Power Factor	0.58	0.70	0.76	Max. compression	:	195 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
11.1	9.1	8.8	5.8	4.0	2.9	2.1
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6308 ZZ		6207 ZZ		
Sealing	:	V'Ring		Lip Seal		
Lubrication interval	:	-		-		
Lubricant amount	:	-		-		
Lubricant type	:	Mobil Polyrex EM				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	29/10/2024				1 / 3	

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 8.15 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	29/10/2024		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____



Product line : W22 Brake Motor NEMA Premium Product code : 15511033
 Efficiency Three-Phase

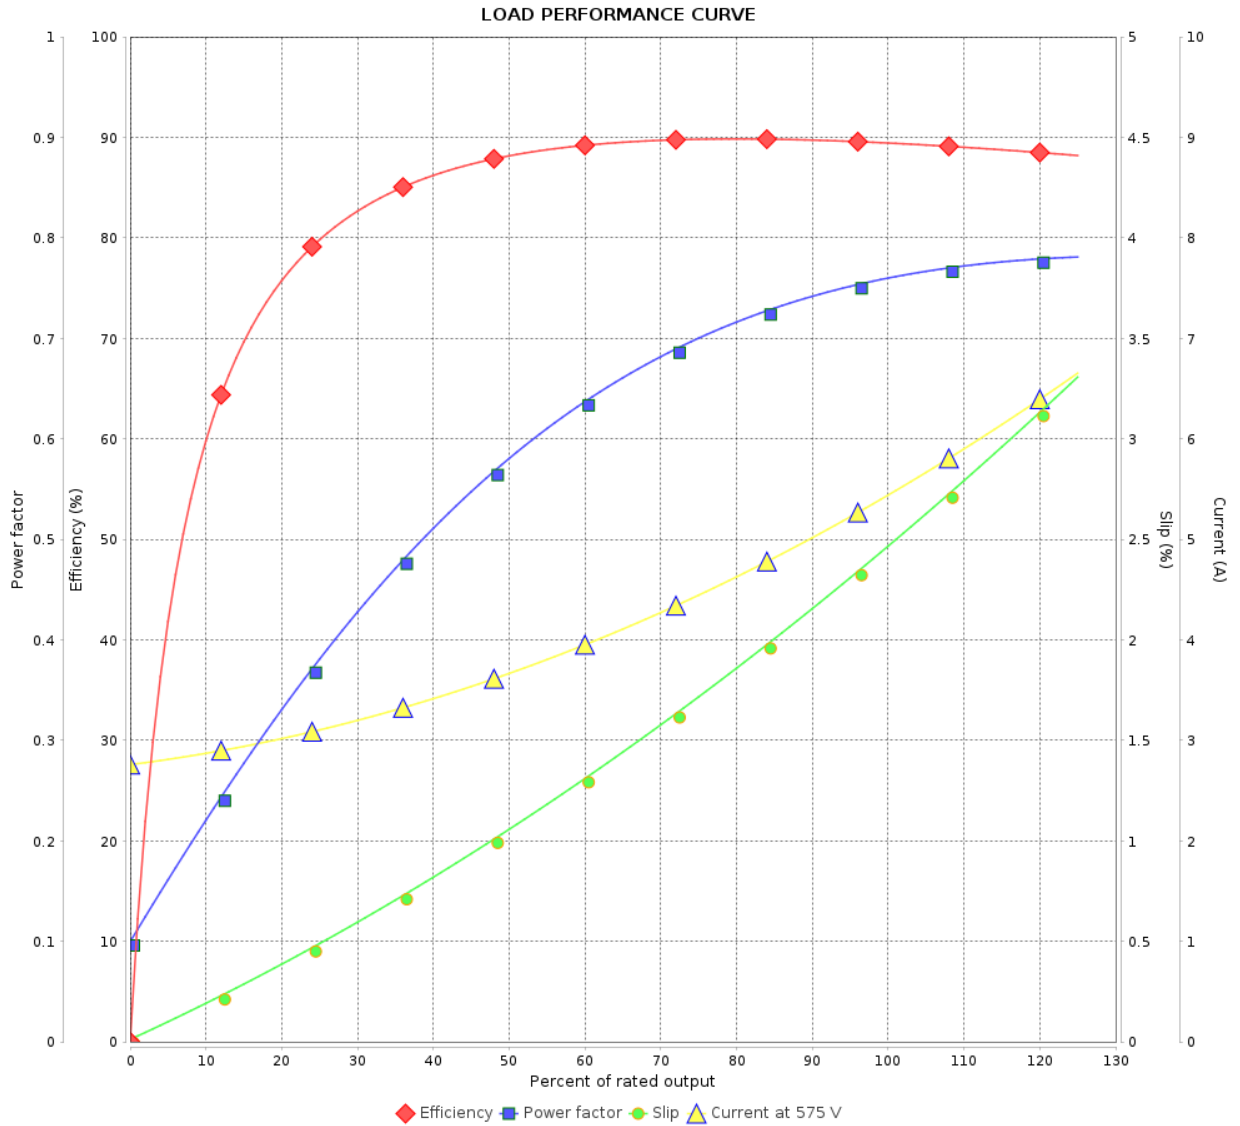

Performance : 575 V 60 Hz 6P

Rated current	: 5.46 A	Moment of inertia (J)	: 0.0620 kgm ²
LRC	: 6.8	Duty cycle	: Cont.(S1)
Rated torque	: 3.10 kgfm	Insulation class	: F
Locked rotor torque	: 170 %	Service factor	: 1.25
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 1170 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 3	Revision
Checked by				
Date	29/10/2024			

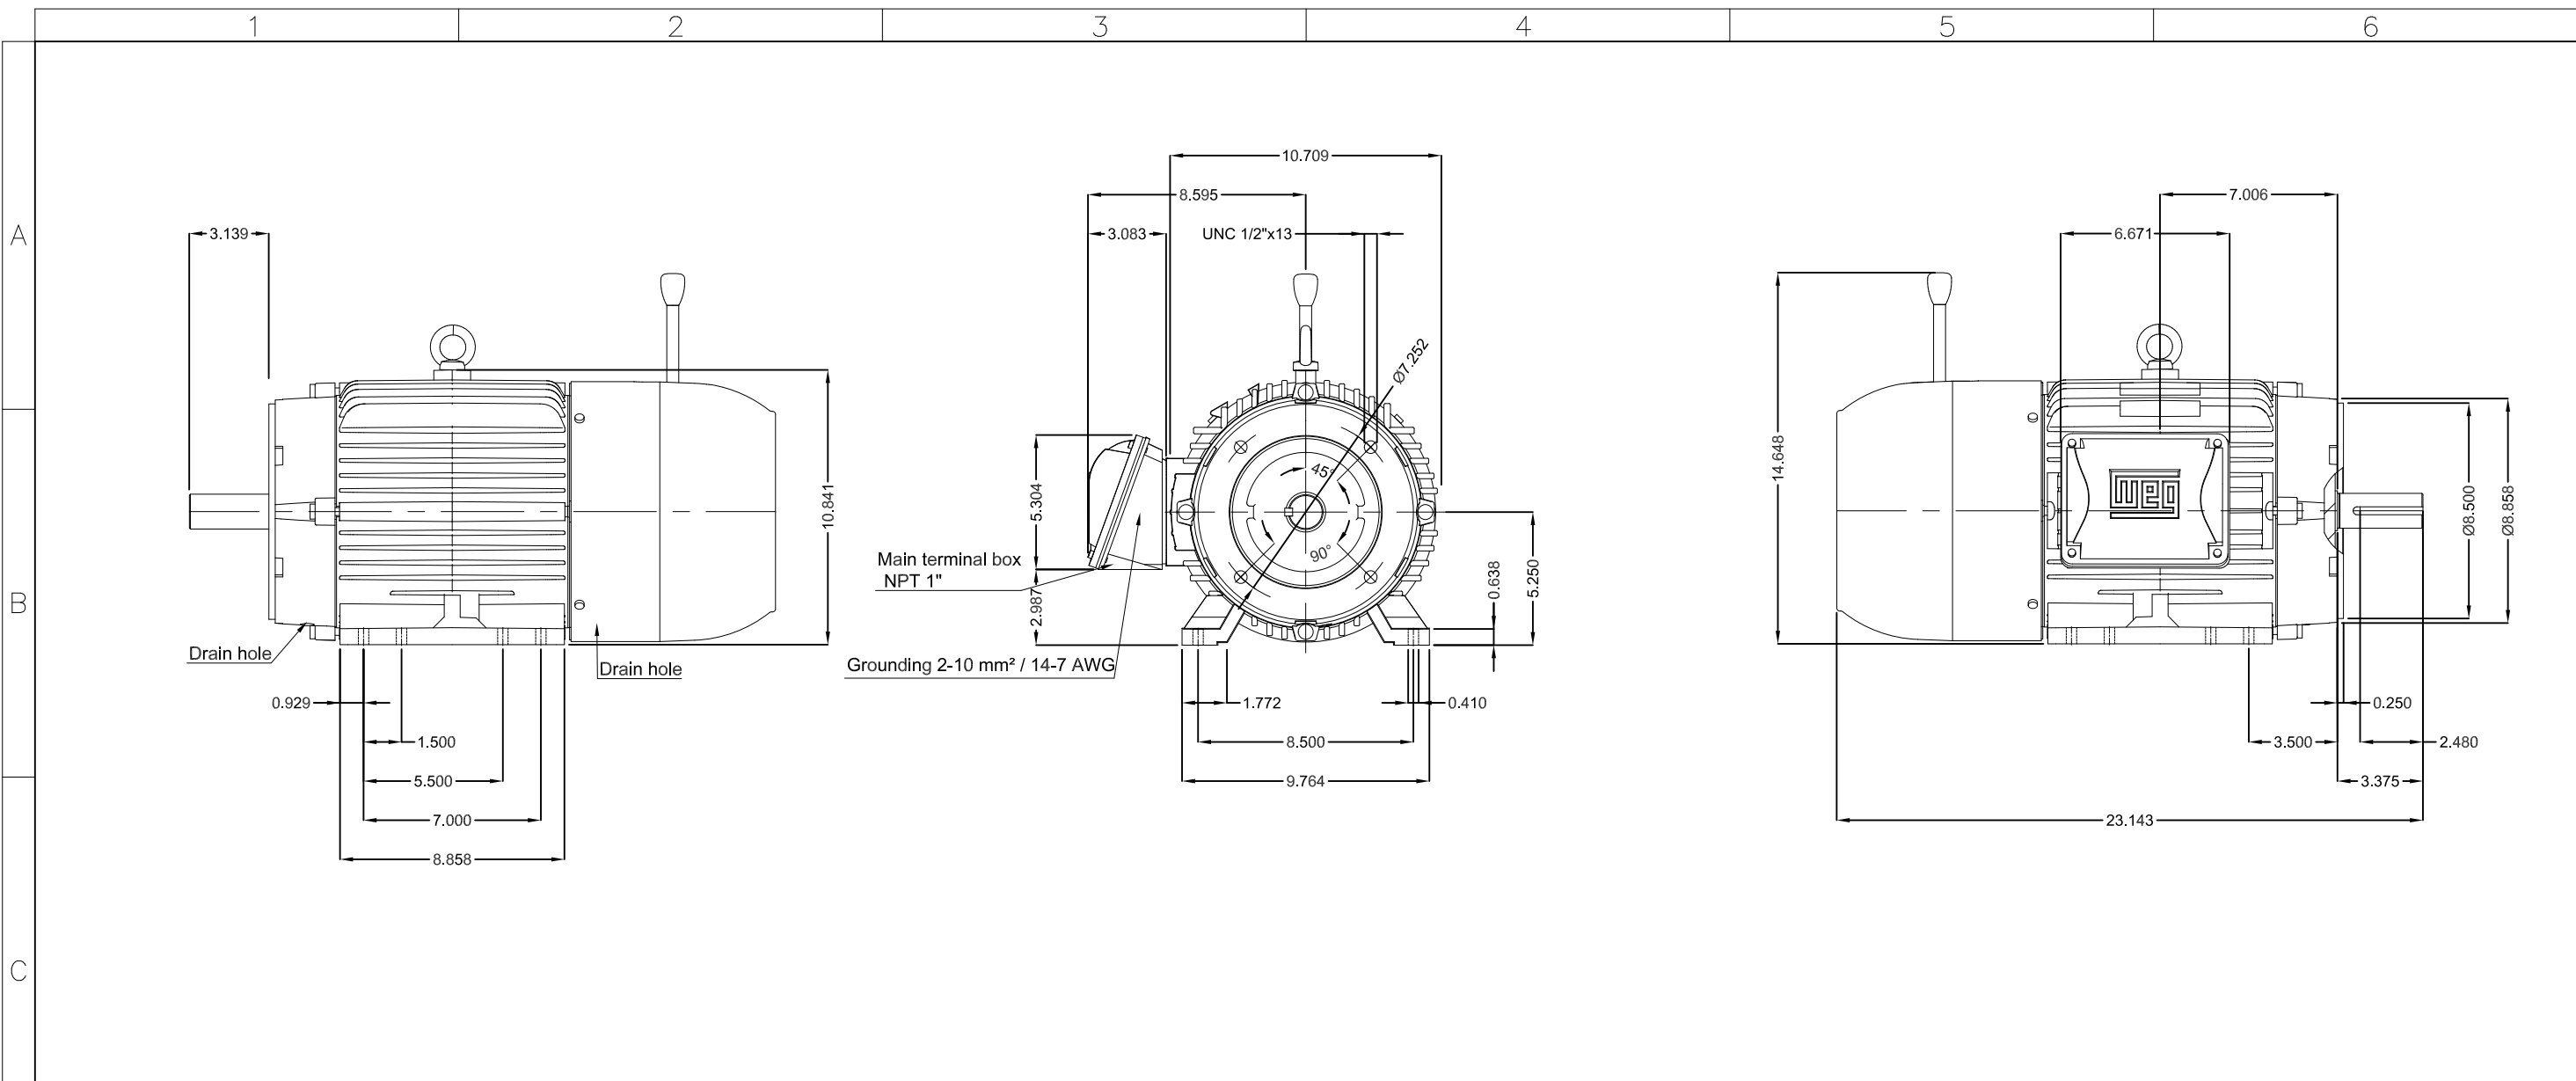

Brake voltage 525-575 V
Break size 16 (80 Nm)
Color RAL 5009
Painting plan 207A
Mounting NEMA F-1
Mounting B34R(D)

5 HP 06 Poles 60 Hz	
ECM	LOC
EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

SUMMARY OF MODIFICATIONS					HYBRISUSER	00
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 BRAKE MOTOR NEMA PREM. EFF.	EXECUTED	CHECKED	RELEASED	DATE
CHECKED		FRAME 213/5TC IP55 TEFC				
RELEASED						
REL. DATE						

PREVIEW

WDD | 00

SHEET /