

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Premium Efficiency Three-Phase	Product code :	15008640
Frame	: 56H	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 17.8 kg	
Design	: A	Moment of inertia (J)	: 0.0054 kgm <sup>2</sup>	
Output [HP]	3			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	2.87			
L. R. Amperes [A]	23.0			
LRC [A]	8.0x(Code J)			
No load current [A]	1.04			
Rated speed [RPM]	3480			
Slip [%]	3.33			
Rated torque [kgfm]	0.626			
Locked rotor torque [%]	229			
Breakdown torque [%]	300			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	16s (cold) 9s (hot)			
Noise level <sup>2</sup>	62.0 dB(A)			
Efficiency (%)	25%			
	50%	84.0		
	75%	85.5		
	100%	85.5		
Power Factor	25%			
	50%	0.76		
	75%	0.86		
	100%	0.90		
Bearing type	: Drive end 6204 ZZ Non drive end 6202 ZZ	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction : 51 kgf		
		Max. compression : 69 kgf		
Lubrication interval	: - -			
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Premium Efficiency Three-Phase Product code : 15008640

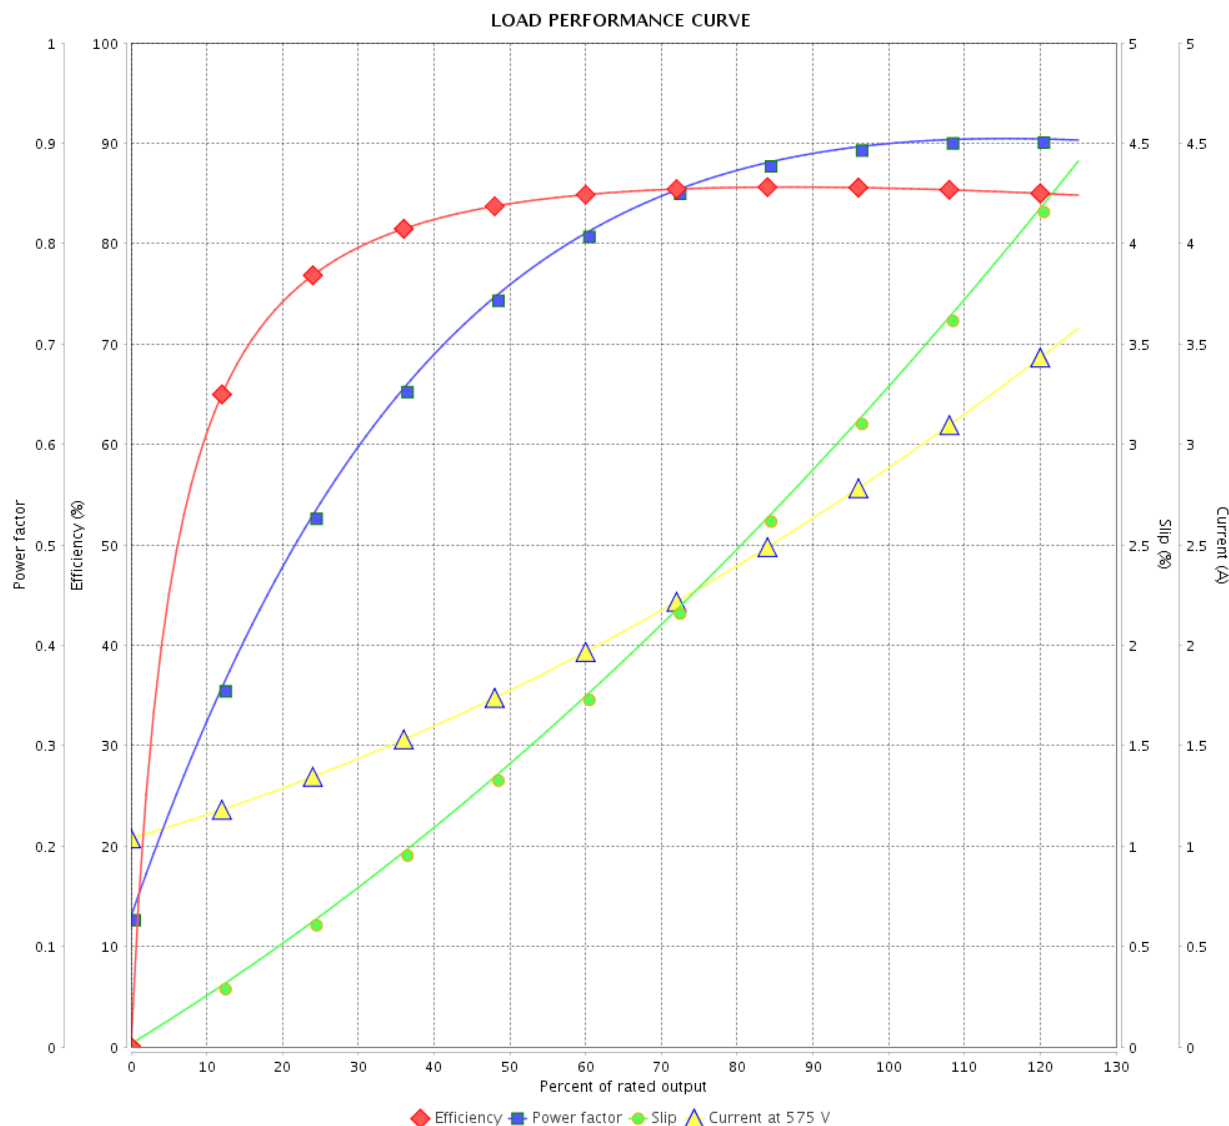

Performance : 575 V 60 Hz 2P

Rated current : 2.87 A  
 LRC : 8.0  
 Rated torque : 0.626 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 300 %  
 Rated speed : 3480 rpm

Moment of inertia (J) : 0.0054 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	17/05/2022				

