

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - ODP - Nema Premium Efficiency

Frame	: 143/5TC	Locked rotor time	: 14 s (hot) 25 s (cold)
Output	: 2 HP (1.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 3280 ft
Rated current	: 4.84/2.42 A	Protection degree	: IP21
L. R. Amperes	: 43.1/21.5 A	Cooling method	: IC01 - ODP
LRC	: 8.9	Mounting	: F-1/B34R(D)
No load current	: 1.83/0.917 A	Rotation ¹	: Both
Rated speed	: 3510 rpm	Noise level ²	: 62.0 dB(A)
Slip	: 2.50 %	Vibration class	: A
Rated torque	: 2.95 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 220 %	Approx. weight ³	: 37.8 lb
Pull up torque	: 185 %	Painting plan	: 207N
Breakdown torque	: 330 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: B
Service factor	: 1.15		
Moment of inertia (J)	: 0.1163 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	84.0	85.5	85.5	Load torque	: -
Power Factor	0.77	0.86	0.91	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads
Bearing type #1	6205-ZZ	6203-ZZ	Max. traction
Bearing type #2	-	-	Max. compression
Lubrication interval	-	-	
Lubricant amount #1	-	-	
Lubricant amount #2	-	-	
Lubricant type	MOBIL POLYREX EM		

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1860745198		
Checked by	AUTOMATICO		Page	Rev.	
Date	15/06/2026		1 / 2	0	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

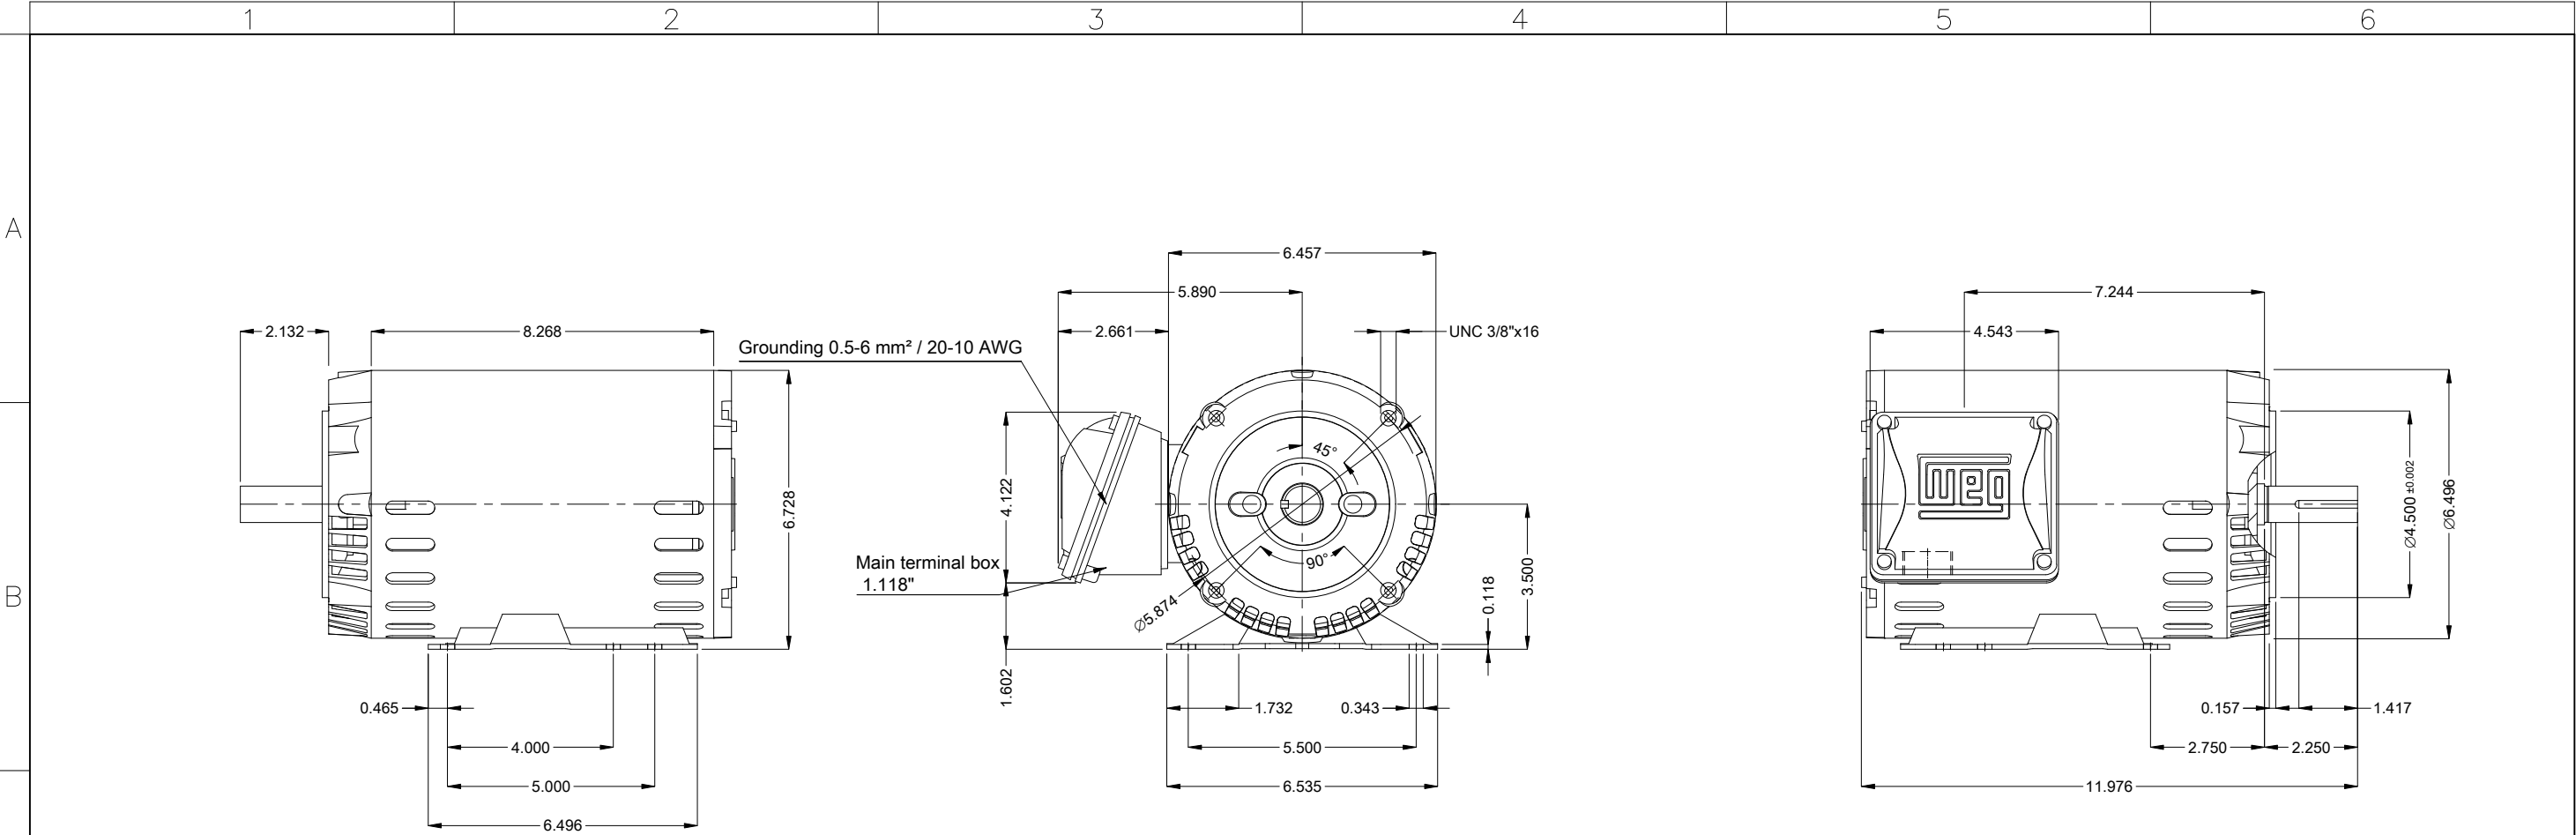
Product line : W01 - ODP - Nema Premium Efficiency


Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------


Notes

USABLE @208V 5.35A SF 1.00 SFA 5.35A

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7	
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12	
	Noise	: MG1 - Part 9			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.		
Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1860745198	
Checked by	AUTOMATICO			Page	Rev.
Date	15/06/2026			2 / 2	0



D					2 HP 02 Poles 60 Hz										A				
					V.J. PAMENSKY CANADA INC.														
					Scale 1 : 4														
															PIRWBUSER				00
					ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER			
					EXECUTED	PIRWBUSER		THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF. FRAME 143/5TC IP21 ODP					PREVIEW WDD 00						
					CHECKED														
					RELEASED														
					REL. DATE														
					SHEET 1 / 1														

E	Internal AEGIS ground ring on the DE Color Munsell N 1 matte black Painting plan 207N Mounting MARKET F-1/B34R(D) Mounting B34D	DE Shaft End 		
---	--	---	--	--