

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Standard Efficiency

Frame	: 182/4TC	Locked rotor time	: 12 s (hot) 22 s (cold)
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 208-230 V	Altitude	: 3280 ft
Rated current	: 13.2-11.9 A	Protection degree	: IP55
L. R. Amperes	: 111-100 A	Cooling method	: IC411 - TEFC
LRC	: 8.4	Mounting	: F-1/B34R(D)
No load current	: 1.81-2.10 A	Rotation ¹	: Both
Rated speed	: 1755 rpm	Noise level ²	: 59.0 dB(A)
Slip	: 2.50 %	Vibration class	: A
Rated torque	: 8.82 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 305 %	Approx. weight ³	: 98.3 lb
Pull up torque	: 255 %	Painting plan	: 207N
Breakdown torque	: 235 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: L
Service factor	: 1.15		
Moment of inertia (J)	: 0.3702 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	72.0	78.5	81.5
Power Factor	0.99	0.99	0.99

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type #1	6206-ZZ	6205-ZZ
Bearing type #2	-	-
Lubrication interval	-	-
Lubricant amount #1	-	-
Lubricant amount #2	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: -
Max. compression	: -

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1864011078		
Checked by	AUTOMATICO		Page	Rev.	
Date	22/06/2026		1 / 2	0	

DATA SHEET

Single Phase Induction Motor - Squirrel Cage






Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Standard Efficiency

Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7		
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12		
	Noise	: MG1 - Part 9				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.			
Rev.		Changes Summary		Rev.	Checked	Date
Performed by		farazq			1864011078	
Checked by		AUTOMATICO			Page	Rev.
Date		22/06/2026			2 / 2	0

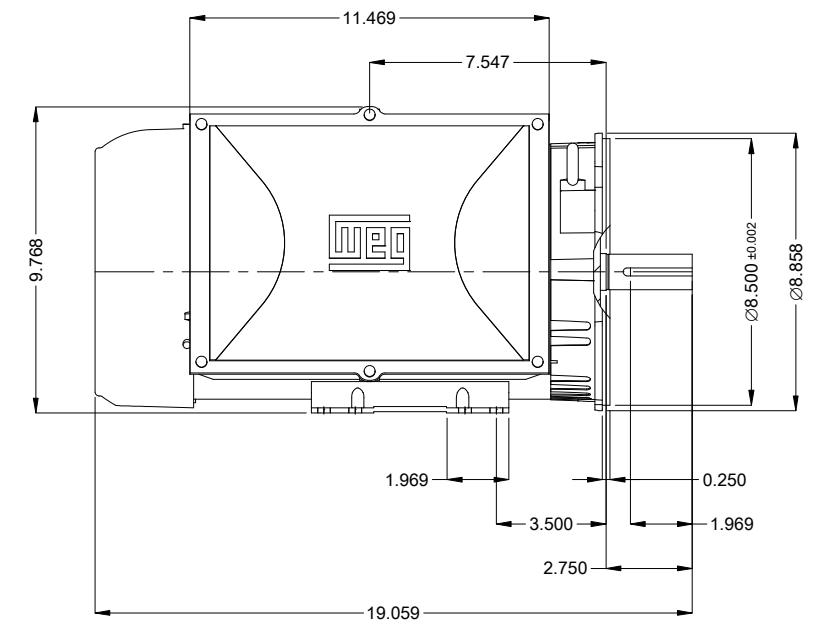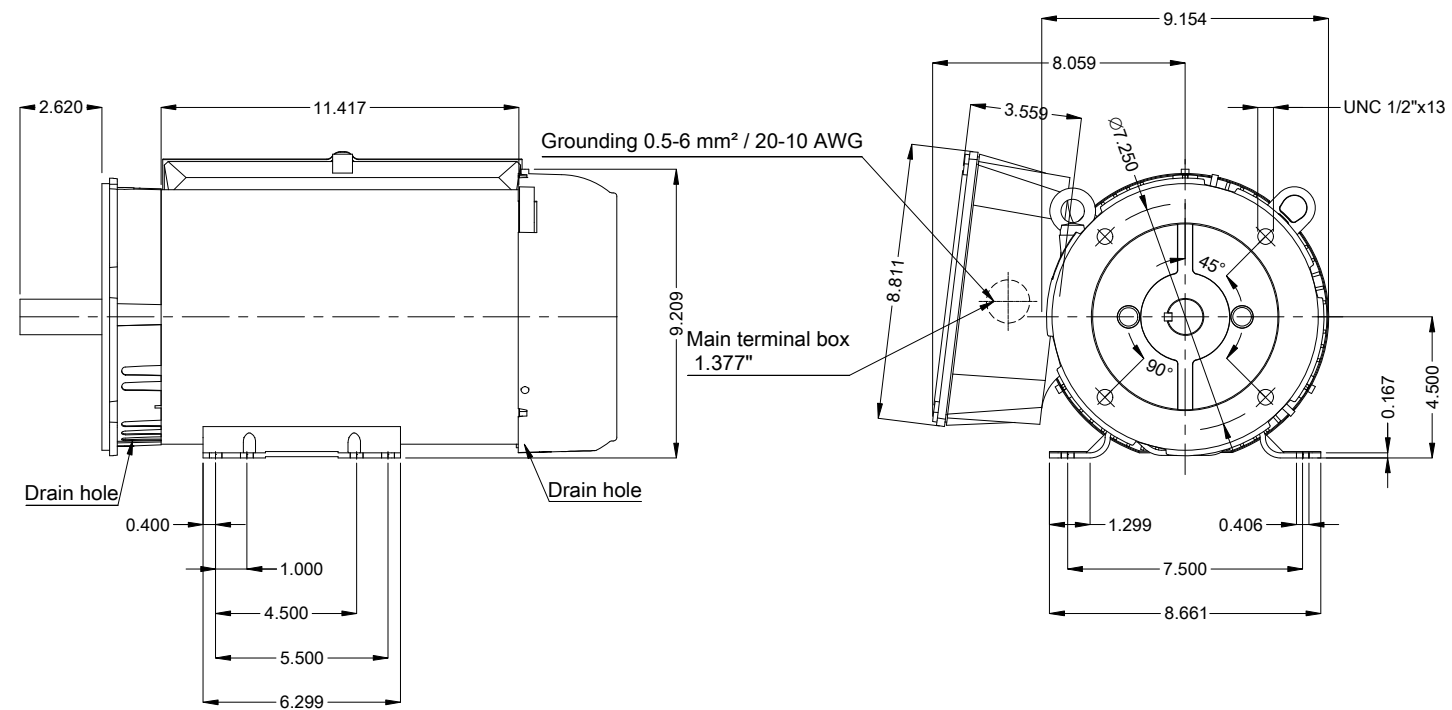

Mounting MARKET F-1/B34R(D)
Mounting B34D

3 HP 04 Poles 60 Hz										A	
V.J. PAMENSKY CANADA INC.											
						Scale				1 : 6	
						PIRWBUSER				00	
ECM		LOC		SUMMARY OF MODIFICATIONS				EXECUTED		CHECKED	
								RELEASED		DATE	
EXECUTED		PIRWBUSER		 SINGLE PH. MOTOR ROLLED STEEL FRAME 182/4TC IP55 TEFC				PREVIEW WDD 00			
CHECKED											
RELEASED											
REL. DATE											
				SHEET				1 / 1			