DATA SHEET

Single Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: 00022 Single-Phase	Product code :	15059894

Frame	: W56C	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight³	: 8.7 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0017 kgm²
Design	: N		

Output [HP]		0.33
Poles		4
Frequency [Hz]		60
Rated voltage [V]		115/230
Rated current [A]		6.00/3.00
L. R. Amperes [A]		33.6/16.8
LRC [A]		5.6x(Code N)
No load current [A]		5.40/2.70
Rated speed [RPM]		1735
Slip [%]		3.61
Rated torque [kgfm]		0.138
Locked rotor torque [%]		320
Breakdown torque [%]		280
Service factor		1.15
Temperature rise		80 K
Locked rotor time		21s (cold) 12s (hot)
Noise level²		52.0 dB(A)
Efficiency (%)	25%	
	50%	46.0
	75%	55.0
	100%	61.0
Power Factor	25%	
	50%	0.42
	75%	0.51
	100%	0.59

		Drive end	Non drive end
Bearing type	:	6203 2RS	6202 2RS
Sealing	:	V'Ring	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Foundation loads

Max. traction : 8 kgf

Max. compression : 16 kgf

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: 00022 Single-Phase	Product code :	15059894

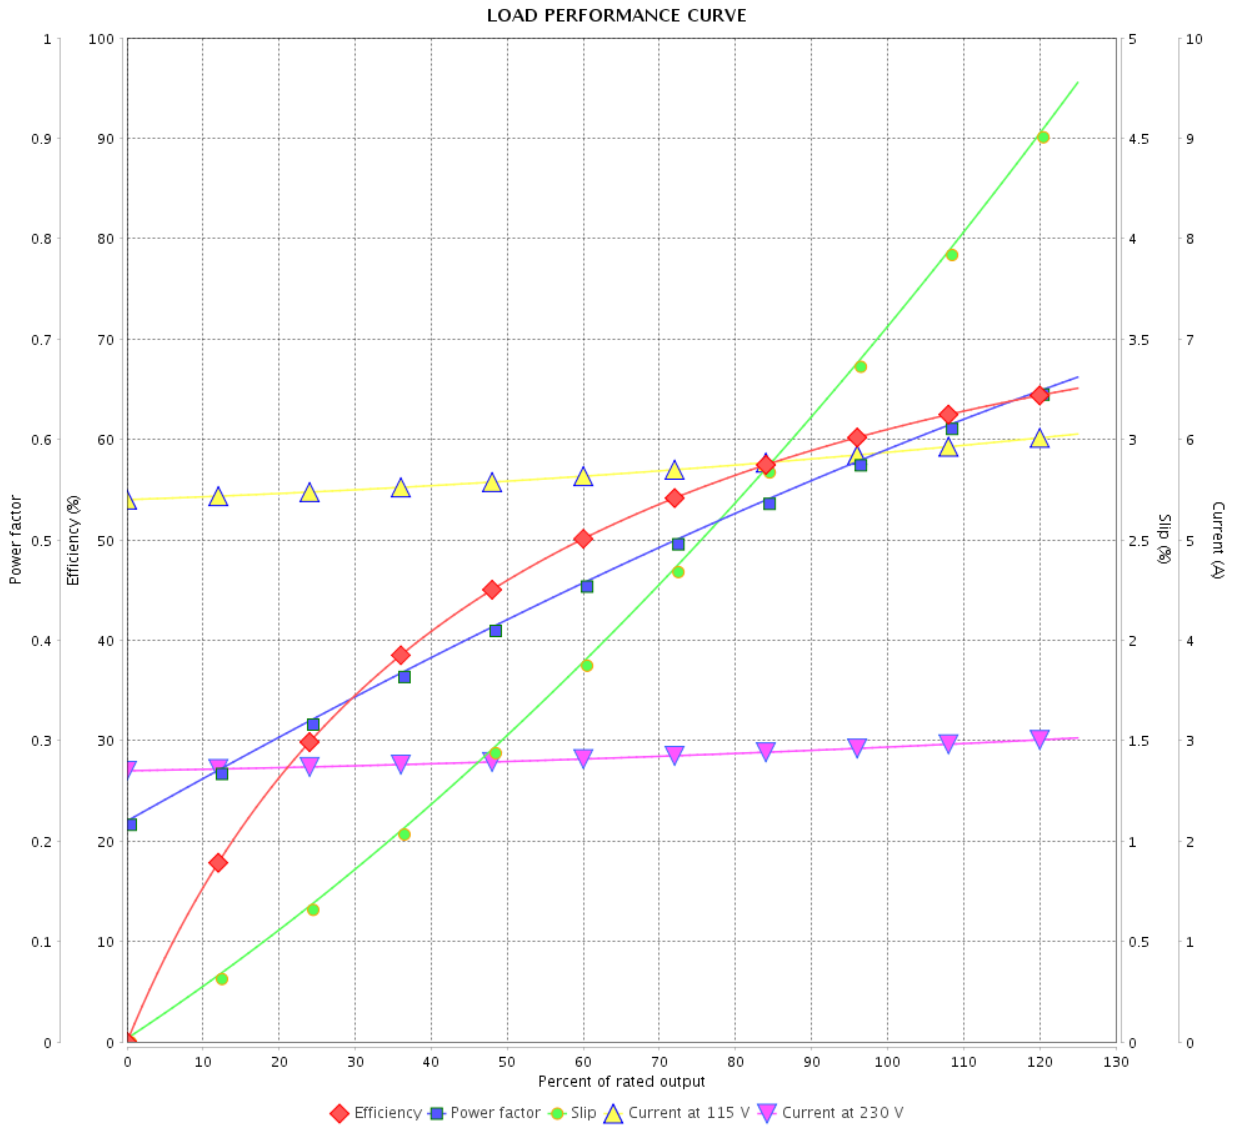


Performance	: 115/230 V 60 Hz 4P		
Rated current	: 6.00/3.00 A	Moment of inertia (J)	: 0.0017 kgm²
LRC	: 5.6	Duty cycle	: Cont.(S1)
Rated torque	: 0.138 kgfm	Insulation class	: F
Locked rotor torque	: 320 %	Service factor	: 1.15
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1735 rpm	Design	: N


Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	17/05/2022		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

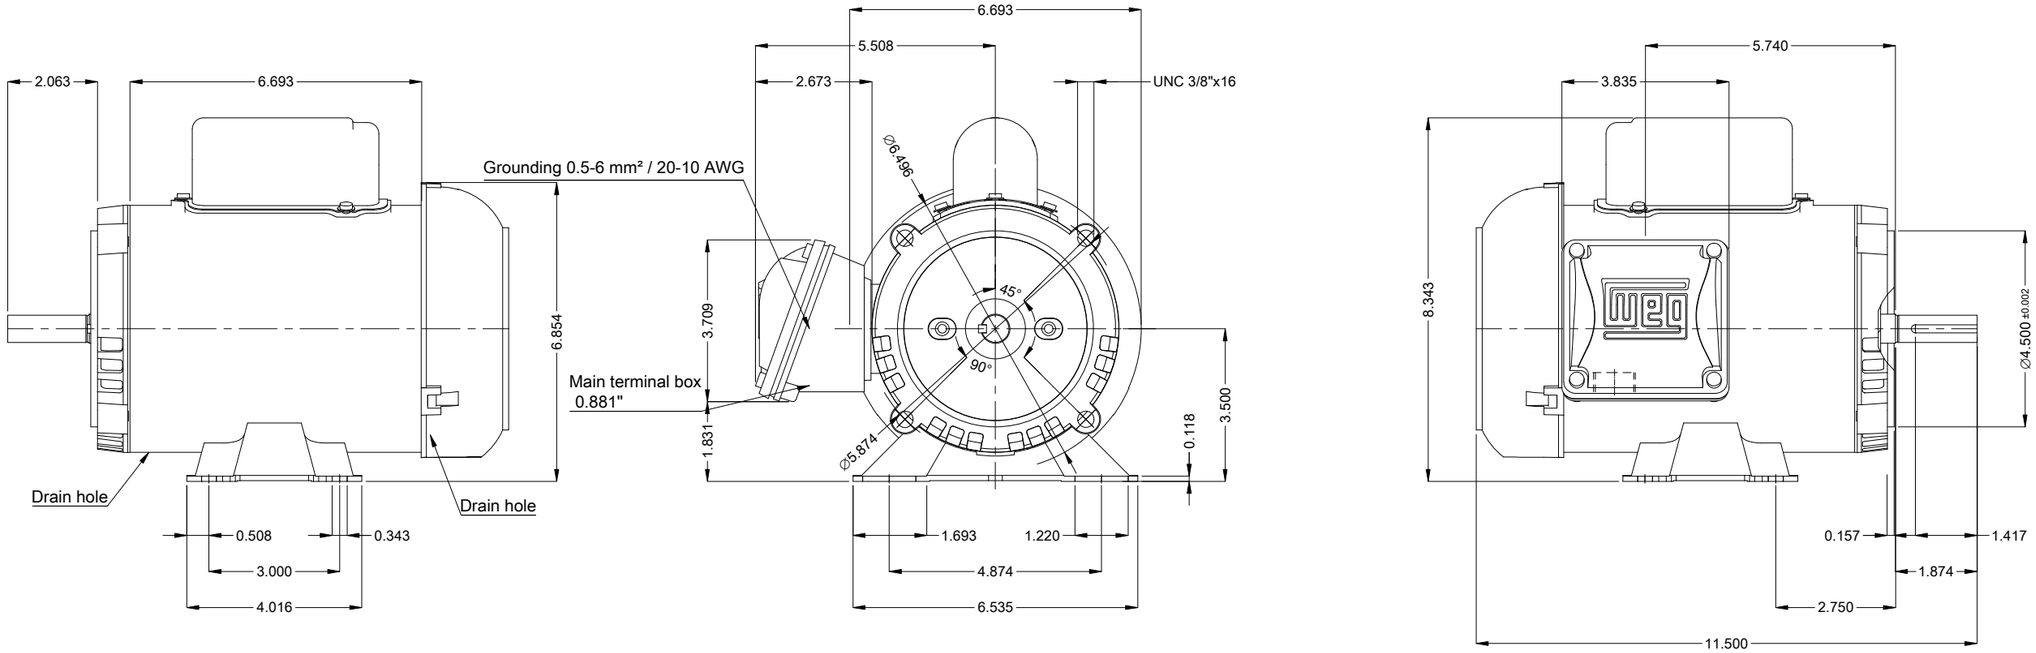

DE Shaft End



Reinforce the foot with 2 mig welding spots

Mounting MARKET F-1/B34R(D)

Mounting B34D

0.33 HP 04 Poles 60 Hz | A

Scale 2 : 7

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

SINGLE PH. MOTOR ROLLED STEEL FARM DUTY

FRAME W56C IP55 TEFC

PREVIEW

WDD 00

SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.