

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Single-Phase		Product code : 15557700		
Frame : W56 Insulation class : F Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Design : N		Cooling method : IC411 - TEFC Mounting : F-1 Rotation ¹ : Both (CW and CCW) Starting method : Direct On Line Approx. weight ³ : 10.9 kg Moment of inertia (J) : 0.0012 kgm²		
Output [HP]		0.33		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		115/208-230		
Rated current [A]		3.18/1.75-1.59		
L. R. Amperes [A]		28.6/15.8-14.3		
LRC [A]		9.0x(Code L)		
No load current [A]		1.00/0.431-0.500		
Rated speed [RPM]		3505		
Slip [%]		2.64		
Rated torque [kgfm]		0.068		
Locked rotor torque [%]		290		
Breakdown torque [%]		320		
Service factor				
Temperature rise		80 K		
Locked rotor time		30s (cold) 17s (hot)		
Noise level ²		66.0 dB(A)		
Efficiency (%)	25%			
	50%	55.0		
	75%	68.0		
	100%	72.0		
Power Factor	25%			
	50%	0.94		
	75%	0.94		
	100%	0.95		
Bearing type : Drive end 6203 ZZ Non drive end 6202 ZZ Sealing : V'Ring Without Bearing Seal Lubrication interval : - - Lubricant amount : - - Lubricant type : Mobil Polyrex EM		Foundation loads Max. traction : 1 kgf Max. compression : 12 kgf		
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Single-Phase

Product code : 15557700

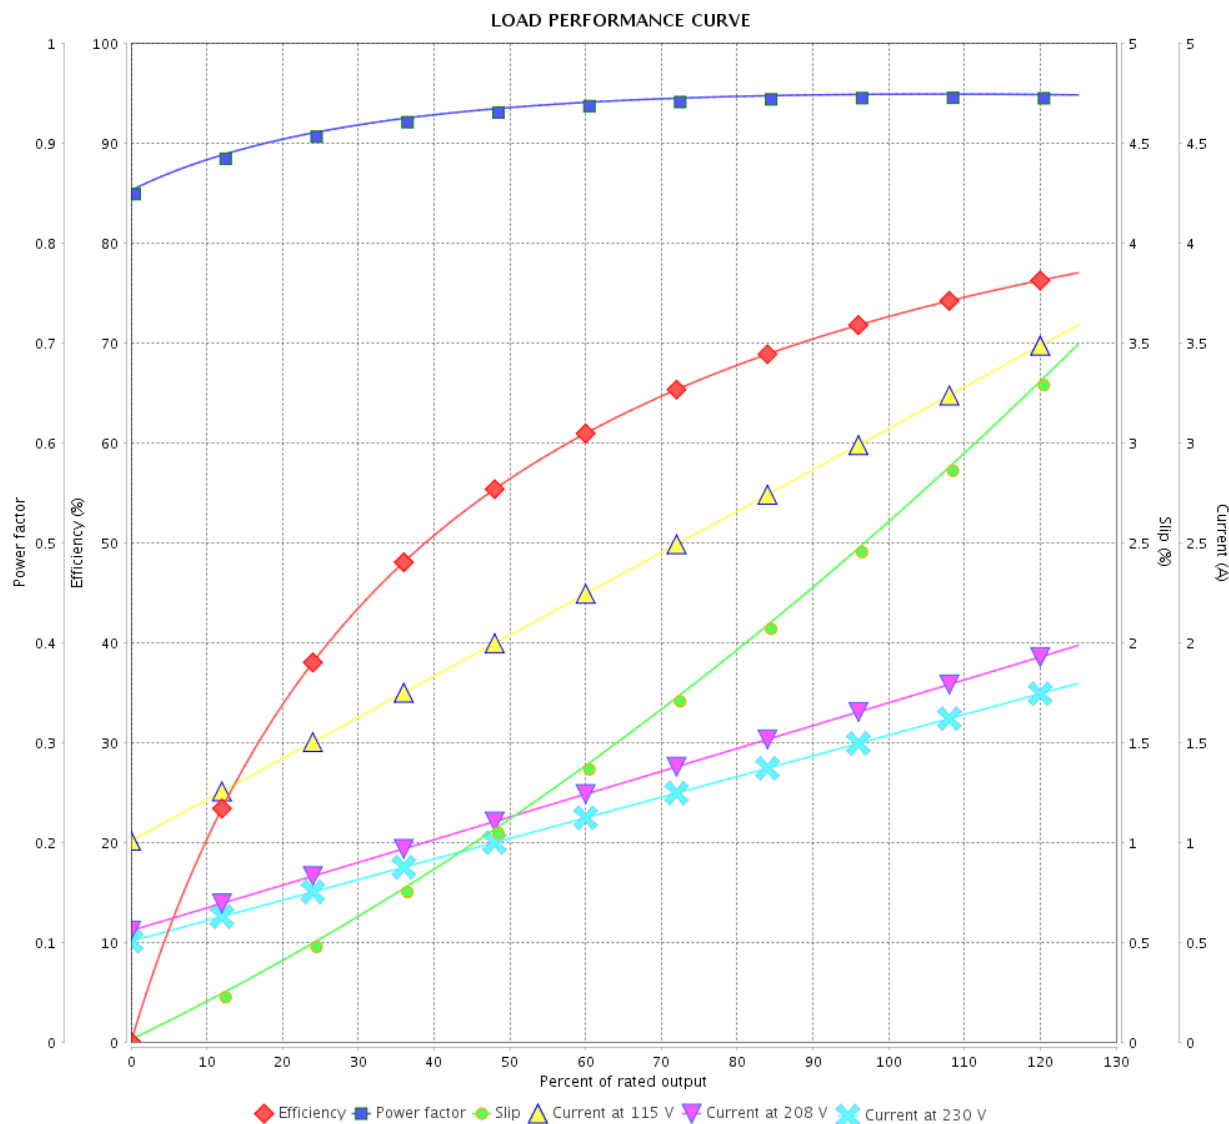

Performance : 115/208-230 V 60 Hz 2P

Rated current : 3.18/1.75-1.59 A
 LRC : 9.0
 Rated torque : 0.068 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 320 %
 Rated speed : 3505 rpm

Moment of inertia (J) : 0.0012 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

