DATA SHEET

Single Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: Single-Phase	Product code :	15557700

Frame	: W56	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation[1]	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight[3]	: 10.9 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0012 kgm²
Design	: N		

Output [HP]		0.33
Poles		2
Frequency [Hz]		60
Rated voltage [V]		115/208-230
Rated current [A]		3.18/1.75-1.59
L. R. Amperes [A]		28.6/15.8-14.3
LRC [A]		9.0x(Code L)
No load current [A]		1.00/0.431-0.500
Rated speed [RPM]		3505
Slip [%]		2.64
Rated torque [kgfm]		0.068
Locked rotor torque [%]		290
Breakdown torque [%]		320
Service factor		
Temperature rise		80 K
Locked rotor time		30s (cold) 17s (hot)
Noise level[2]		66.0 dB(A)
Efficiency (%)	25%	
	50%	55.0
	75%	68.0
	100%	72.0
Power Factor	25%	
	50%	0.94
	75%	0.94
	100%	0.95

		Drive end	Non drive end
Bearing type	:	6203 ZZ	6202 ZZ
Sealing	:	V'Ring	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Foundation loads

Max. traction : 1 kgf

Max. compression : 12 kgf

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Single-Phase	Product code :	15557700

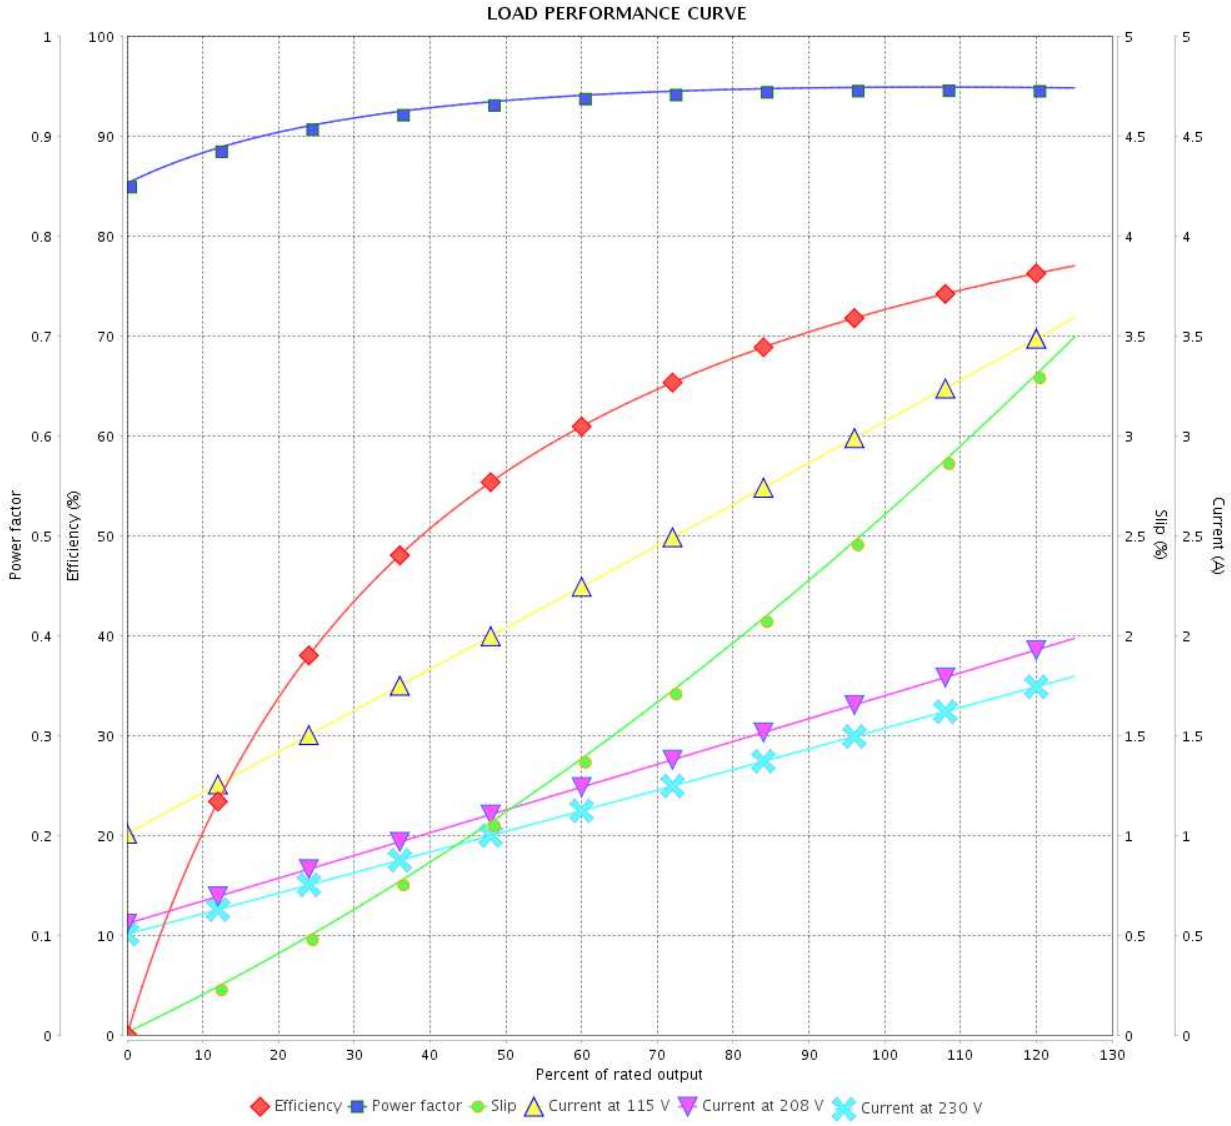


Performance	: 115/208-230 V 60 Hz 2P		
Rated current	: 3.18/1.75-1.59 A	Moment of inertia (J)	: 0.0012 kgm²
LRC	: 9.0	Duty cycle	: Cont.(S1)
Rated torque	: 0.068 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	:
Breakdown torque	: 320 %	Temperature rise	: 80 K
Rated speed	: 3505 rpm	Design	: N


Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	17/05/2022		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

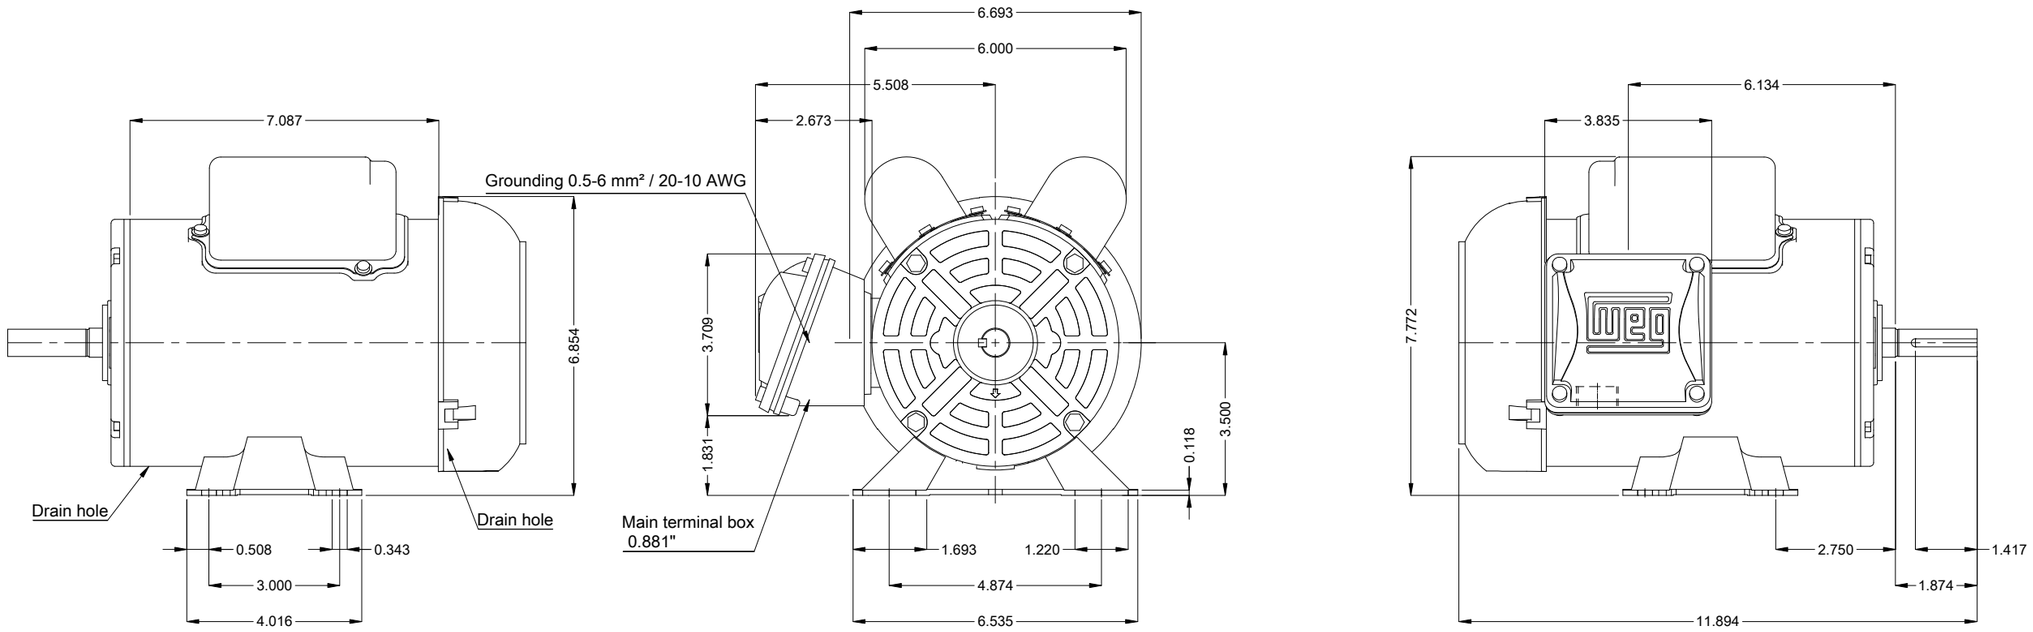

DE Shaft End



Reinforce the foot with 2 mig welding spots
Color Munsell N 1 matte black
Painting plan 207N
Mounting MARKET F-1/B3R(D)
Mounting F-1/B3R(D)

0.33 HP 02 Poles 60 Hz | A

Scale 2 : 7

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

SINGLE PH. MOTOR ROLLED STEEL PREM. EFF.
FRAME W56 IP55 TEFC

PREVIEW

WDD | 00

SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.