DATA SHEET

Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : Rolled Steel 00022 Single-Phase Product code : 16026847

Frame	: W56C	Locked rotor time	: 18s (cold) 10s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 8.00/4.00 A	Protection degree	: IP55
L. R. Amperes	: 45.6/22.8 A	Cooling method	: IC411 - TEFC
LRC	: 5.7x(Code M)	Mounting	: F-1
No load current	: 6.60/3.30 A	Rotation¹	: Both (CW and CCW)
Rated speed	: 1730 rpm	Noise level²	: 52.0 dB(A)
Slip	: 3.89 %	Vibration	: A
Rated torque	: 0 kgfm	Starting method	: Direct On Line
Locked rotor torque	: 320 %	Approx. weight³	: 9.4 kg
Breakdown torque	: 270 %		: 207N (ISO 12944 - C2)
Insulation class	: F		: RAL 3003
Service factor	: 1.15	Design	: N
Moment of inertia (J)	: 0.0020 kgm²		

Output	50%	75%	100%
Efficiency (%)	52.0	59.0	64.0
Power Factor	0.44	0.54	0.63

Foundation loads

Max. traction	: 13 kgf
Max. compression	: 23 kgf

		Drive end	Non drive end
Bearing type	:	6203 ZZ	6202 ZZ
Sealing	:	V'Ring	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	09/10/2026		1 / 2	


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : Rolled Steel 00022 Single-Phase Product code : 16026847

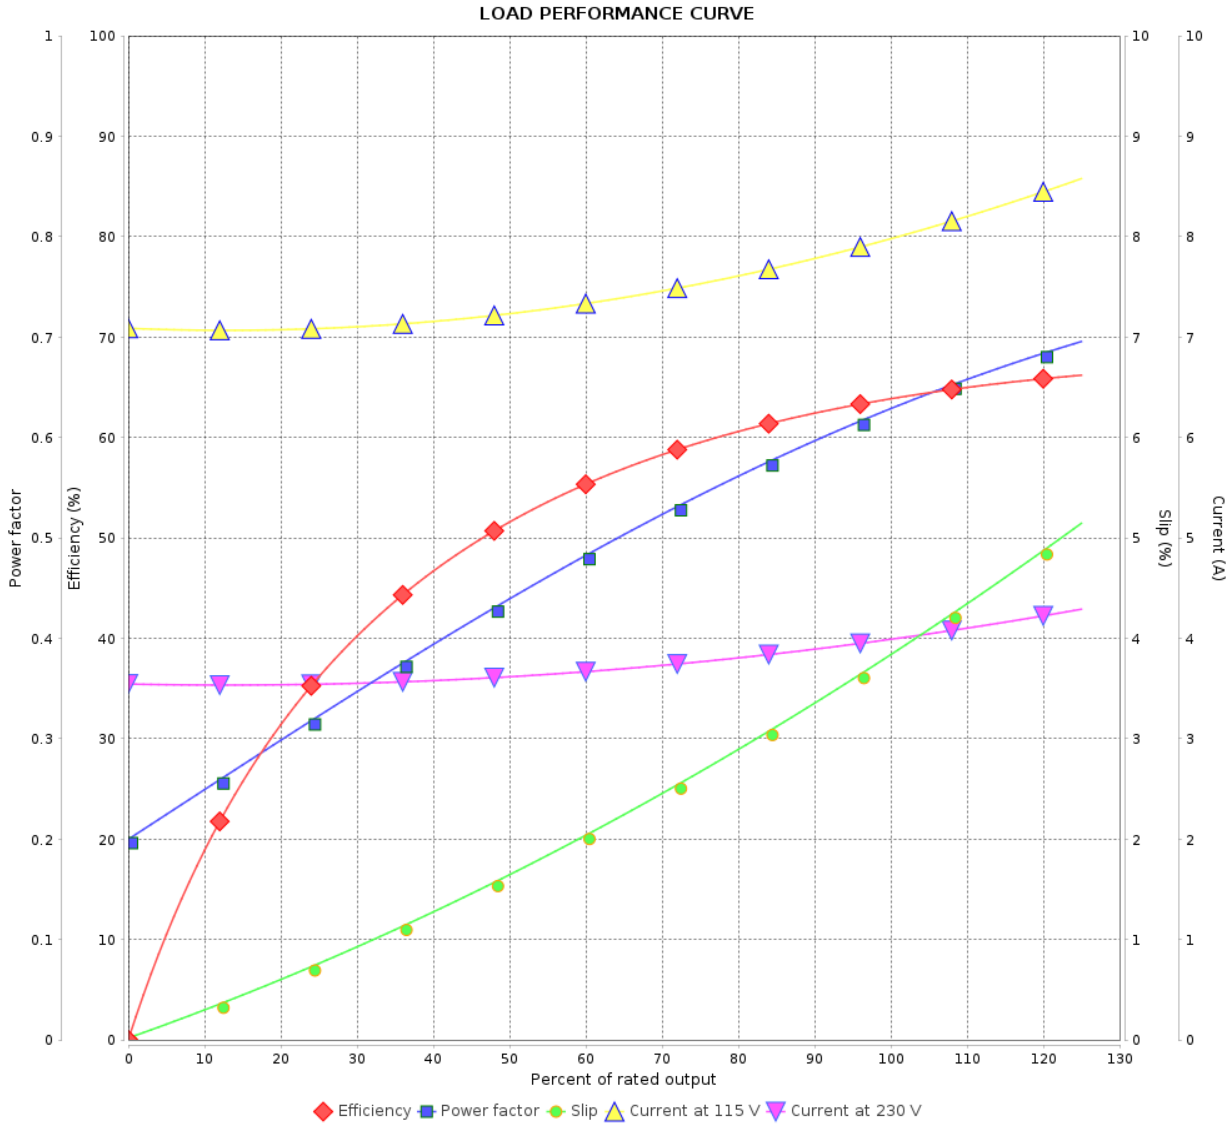


Performance	: 115/230 V 60 Hz 4P		
Rated current	: 8.00/4.00 A	Moment of inertia (J)	: 0.0020 kgm²
LRC	: 5.7	Duty cycle	: Cont.(S1)
Rated torque	: 0 kgfm	Insulation class	: F
Locked rotor torque	: 320 %	Service factor	: 1.15
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1730 rpm	Design	: N

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	09/10/2026		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

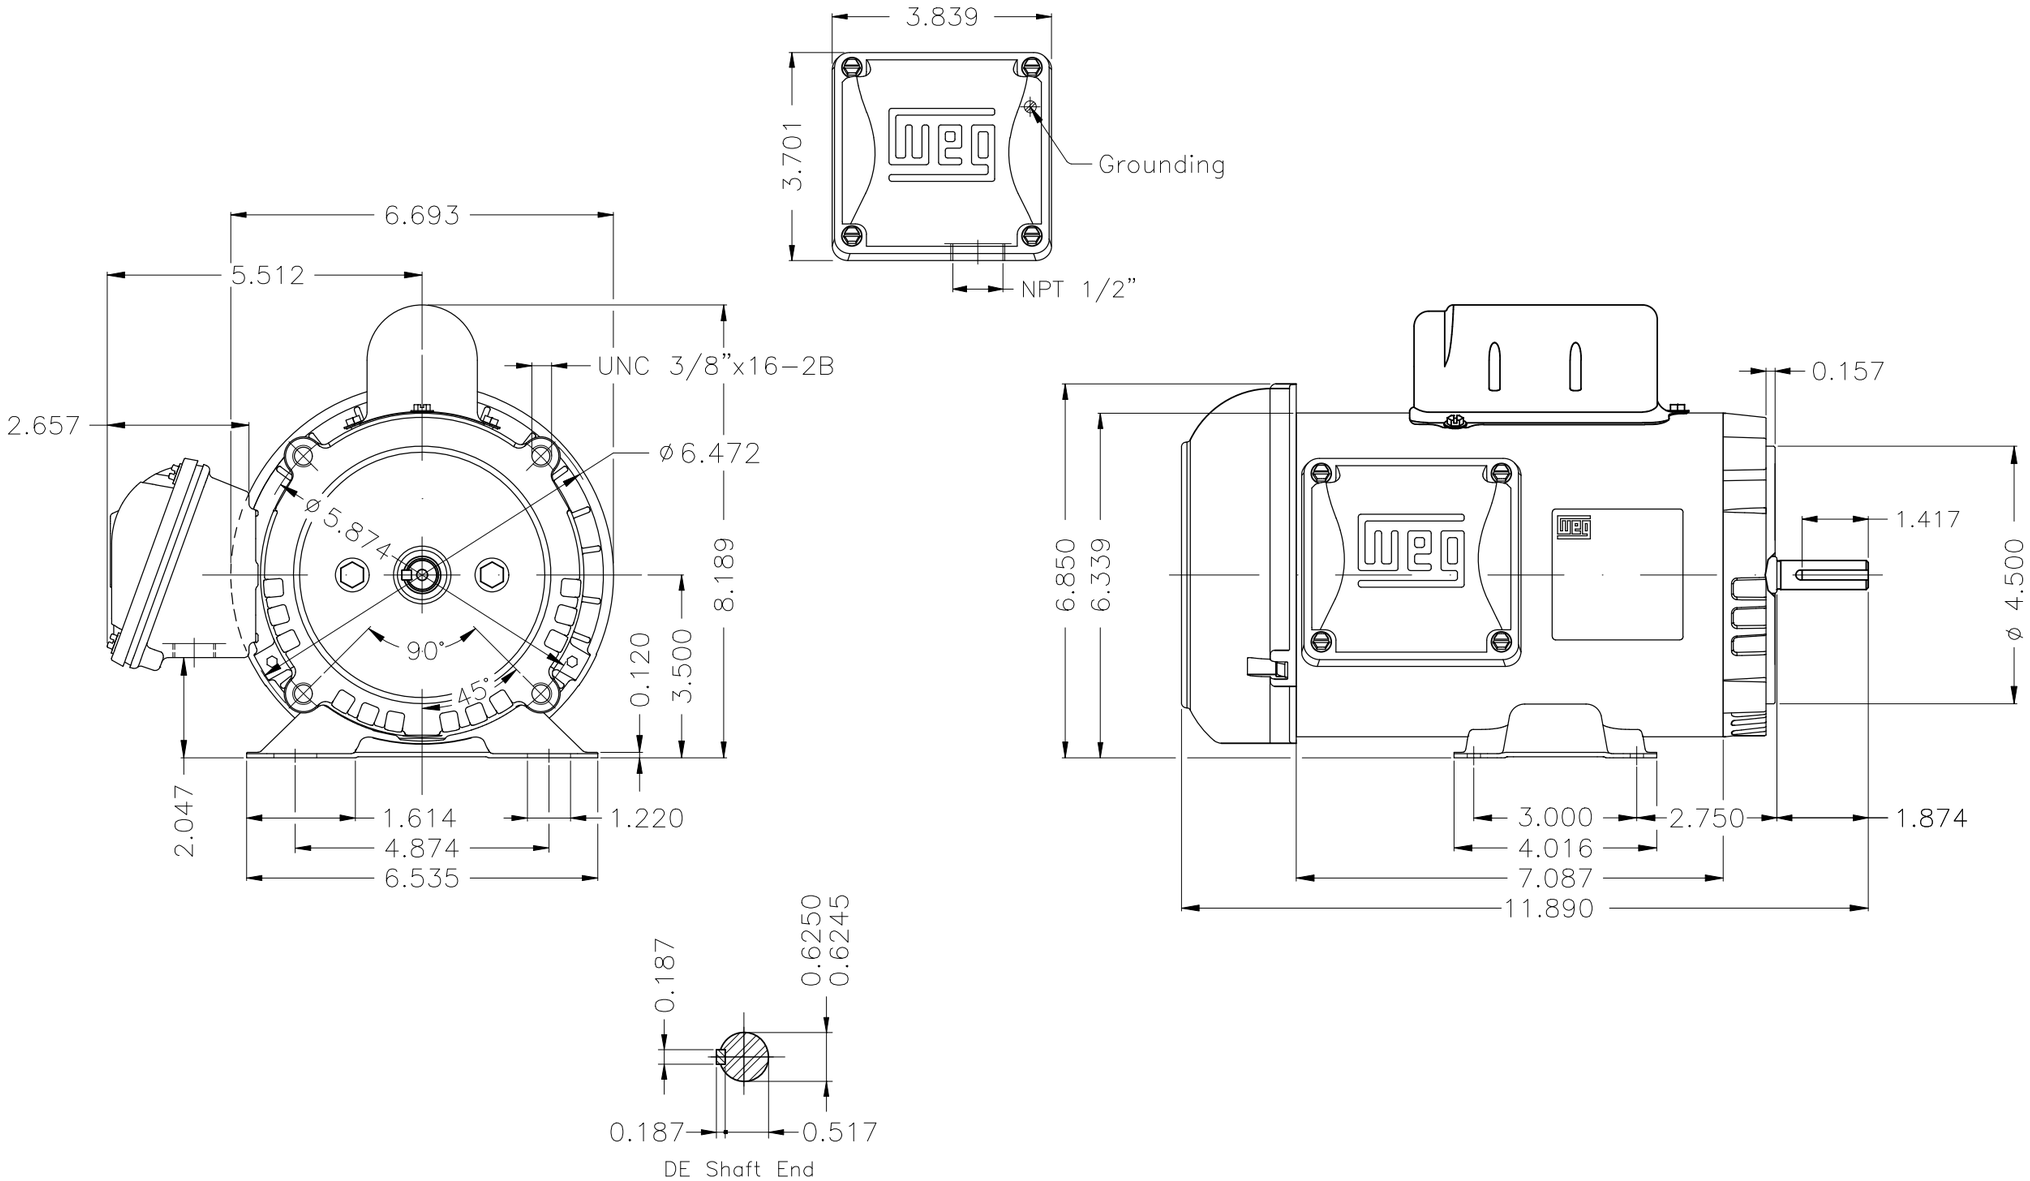

NDE-bearing with double shield-ZZ

DE-bearing with double shield-ZZ

Mounting B34D

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER	SINGLE PH. MOTOR ROLLED STEEL FARM DUTY	PREVIEW
CHECKED		FRAME W56C IP55 TEFC	WDD 00
RELEASED			
REL. DATE		WMO Jaragua do Sul Product Engineering	SHEET 1 / 1

0.5 HP 04 Poles 60 Hz

A

Dimensions in inches

XME A3

WEG's property. Forbidden reproduction without previous authorization.