

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :		
Product line	: NEMA Premium Efficiency Three-Phase	
Product code	: 12628876	
Frame	: 143/5T	
Insulation class	: F	
Duty cycle	: Cont.(S1)	
Ambient temperature	: -20°C to +40°C	
Altitude	: 1000 m.a.s.l.	
Design	: B	
Cooling method	: IC01 - ODP	
Mounting	: F-1	
Rotation <sup>1</sup>	: Both (CW and CCW)	
Starting method	: Direct On Line	
Approx. weight <sup>3</sup>	: 18.2 kg	
Moment of inertia (J)	: 0.0049 kgm <sup>2</sup>	
Output [HP]	2	
Poles	4	
Frequency [Hz]	60	
Rated voltage [V]	230/460	
Rated current [A]	5.38/2.69	
L. R. Amperes [A]	41.4/20.7	
LRC [A]	7.7x(Code K)	
No load current [A]	2.75/1.38	
Rated speed [RPM]	1740	
Slip [%]	3.33	
Rated torque [kgfm]	0.834	
Locked rotor torque [%]	260	
Breakdown torque [%]	320	
Service factor	1.00	
Temperature rise	80 K	
Locked rotor time	30s (cold) 17s (hot)	
Noise level <sup>2</sup>	52.0 dB(A)	
Efficiency (%)	25%	85.2
	50%	85.5
	75%	86.5
	100%	86.5
Power Factor	25%	0.36
	50%	0.61
	75%	0.74
	100%	0.81
Bearing type	: Drive end 6205 ZZ Non drive end 6203 ZZ	
Sealing	: Without Without Bearing Seal Bearing Seal	
Lubrication interval	: - -	
Lubricant amount	: - -	
Lubricant type	: Mobil Polyrex EM	
Foundation loads	Max. traction : 66 kgf	
	Max. compression : 85 kgf	
Notes		
USABLE @208V 5.95A SF 1.00 SFA 5.95A		
This revision replaces and cancel the previous one, which must be eliminated.		
(1) Looking the motor from the shaft end.		
(2) Measured at 1m and with tolerance of +3dB(A).		
(3) Approximate weight subject to changes after manufacturing process.		
(4) At 100% of full load.		
These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	
Performed by	Performed	
Checked by	Checked	
Date	13/05/2022	
Page	1 / 4	
Revision		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12628876

LOAD PERFORMANCE CURVE

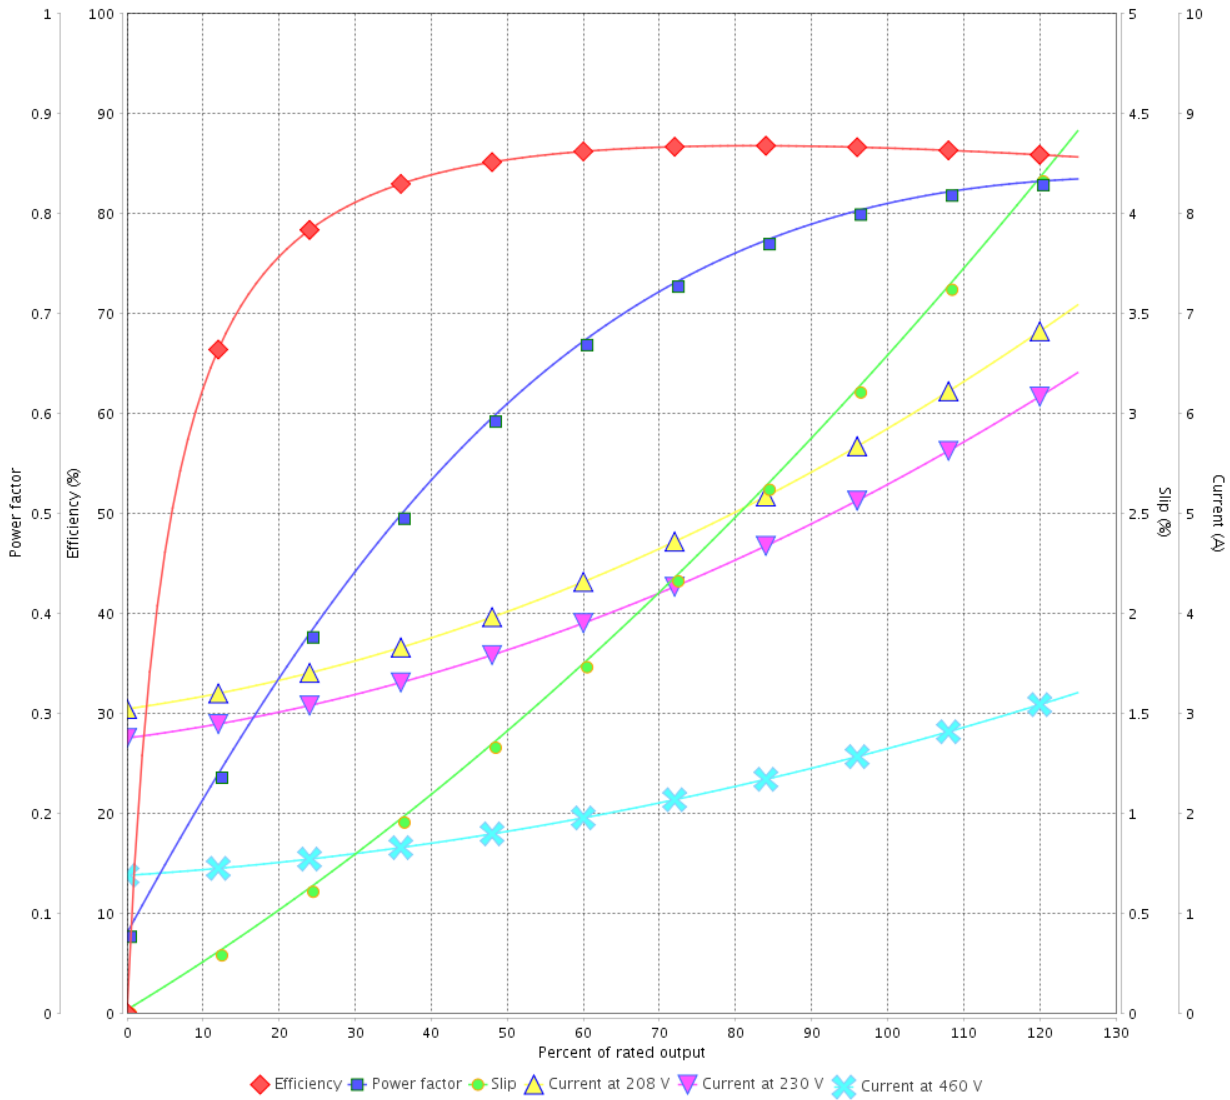

Performance : 230/460 V 60 Hz 4P

Rated current : 5.38/2.69 A  
 LRC : 7.7  
 Rated torque : 0.834 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 320 %  
 Rated speed : 1740 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 4	Revision
Checked by				
Date	13/05/2022			


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12628876

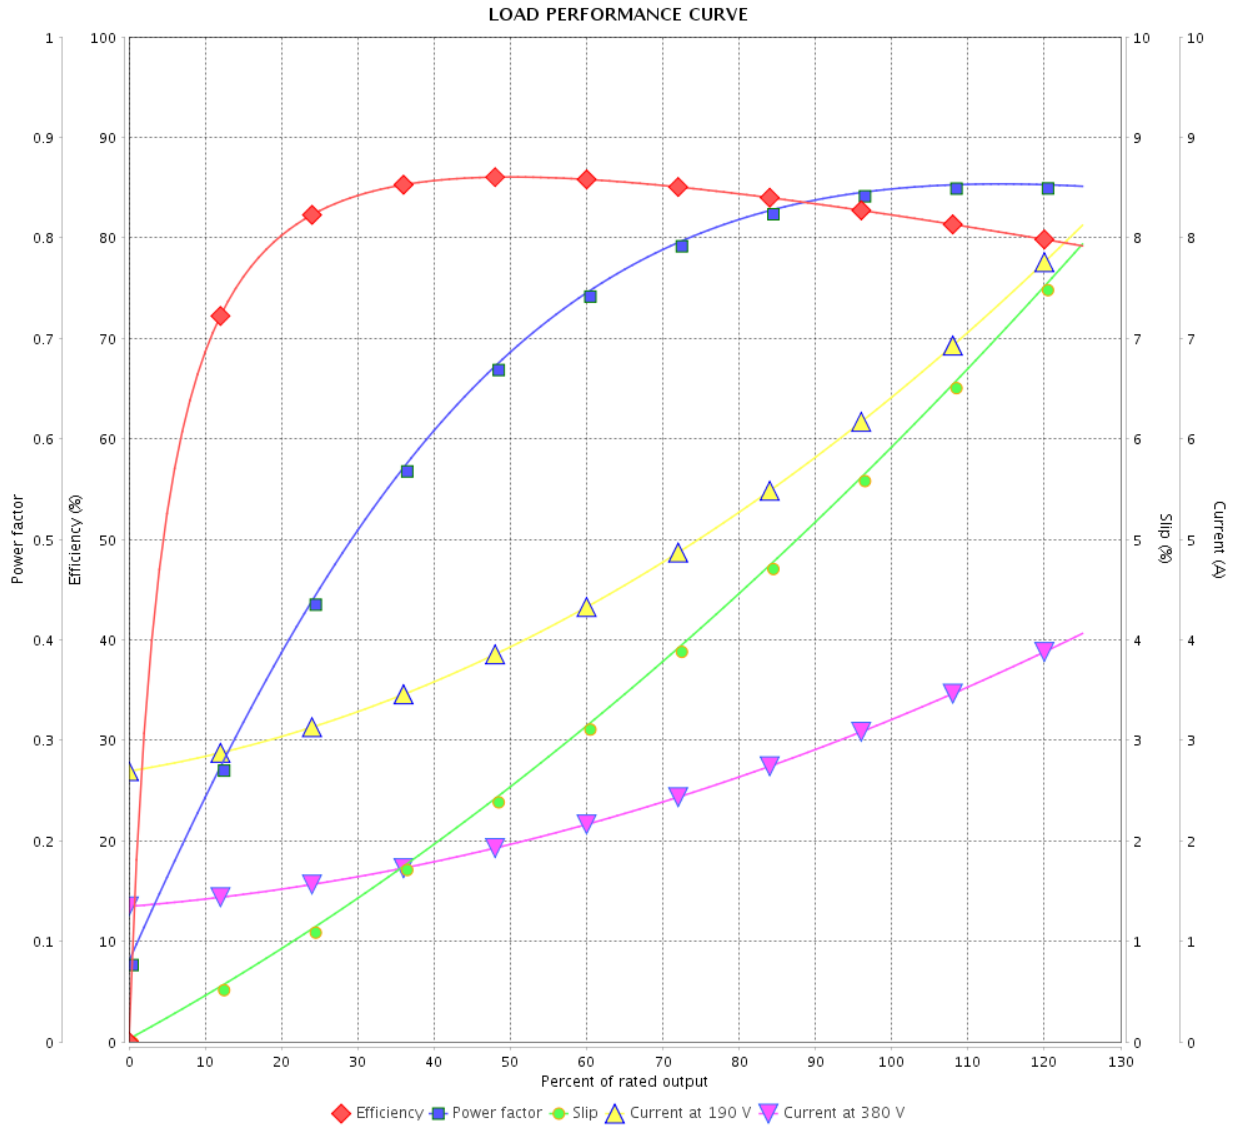

Performance : 190/380 V 50 Hz 4P

Rated current : 6.52/3.26 A  
 LRC : 5.6  
 Rated torque : 1.03 kgfm  
 Locked rotor torque : 200 %  
 Breakdown torque : 229 %  
 Rated speed : 1410 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 4		
Date		13/05/2022		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12628876

LOAD PERFORMANCE CURVE

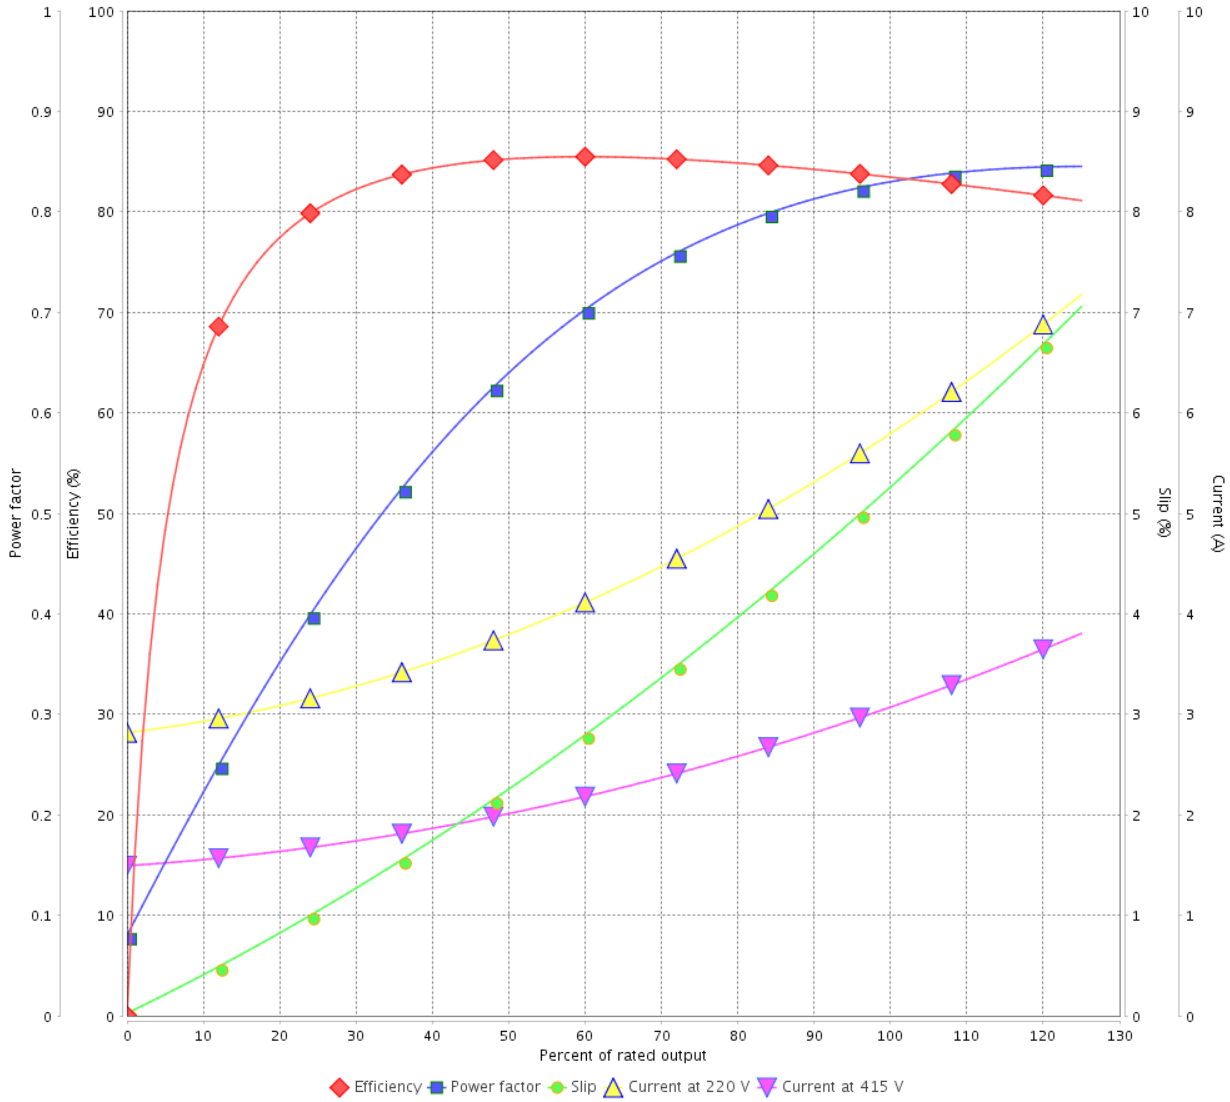

Performance : 220/415 V 50 Hz 4P

Rated current : 5.90/3.13 A  
 LRC : 6.2  
 Rated torque : 1.02 kgfm  
 Locked rotor torque : 220 %  
 Breakdown torque : 260 %  
 Rated speed : 1420 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

