DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line	: General High Efficiency Three-Phase	Product code :	11996114

Frame	: 213/5TC	Locked rotor time	: 14s (cold) 8s (hot)
Output	: 7.5 HP (5.5 kW)	Temperature rise	: 105 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 7.52 A	Protection degree	: IP21
L. R. Amperes	: 50.4 A	Cooling method	: IC01 - ODP
LRC	: 6.7x(Code H)	Mounting	: W-6
No load current	: 3.28 A	Rotation[1]	: Both (CW and CCW)
Rated speed	: 1755 rpm	Noise level[2]	: 58.0 dB(A)
Slip	: 2.50 %	Starting method	: Direct On Line
Rated torque	: 3.10 kgfm	Approx. weight[3]	: 32.6 kg
Locked rotor torque	: 180 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0388 kgm²		
Design	: B		

Output	50%	75%	100%
Efficiency (%)	87.5	88.5	88.5
Power Factor	0.68	0.78	0.83

Foundation loads

Max. traction	: 143 kgf
Max. compression	: 143 kgf

		Drive end	Non drive end
Bearing type	:	6208 ZZ	6206 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	09/07/2026		1 / 2	


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: General High Efficiency Three-Phase	Product code :	11996114

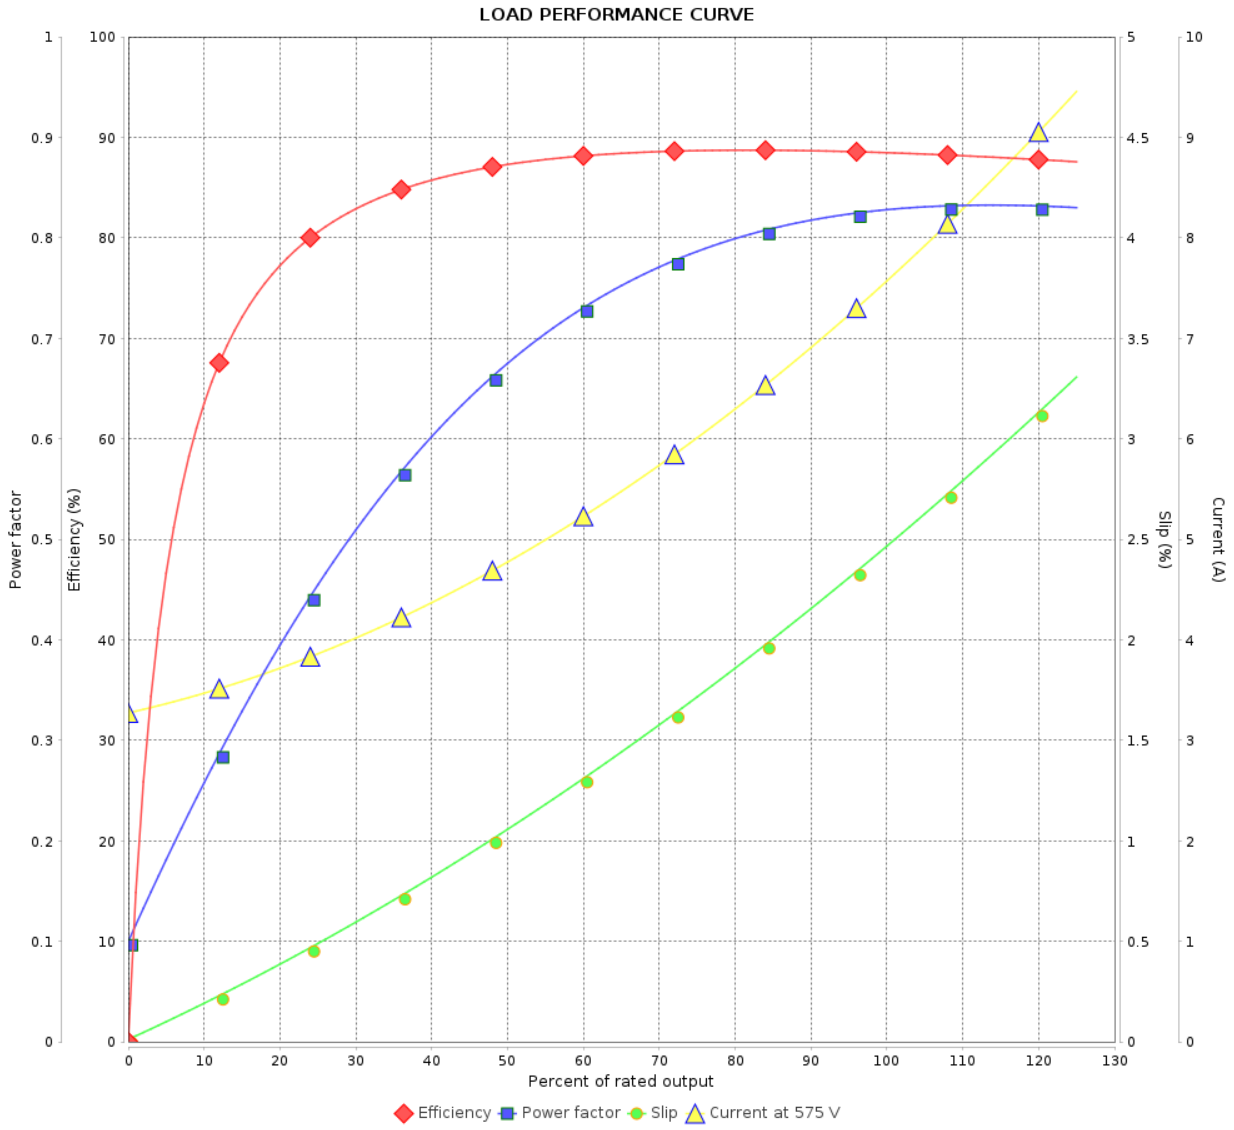


Performance	: 575 V 60 Hz 4P


Rated current	: 7.52 A	Moment of inertia (J)	: 0.0388 kgm²
LRC	: 6.7	Duty cycle	: Cont.(S1)
Rated torque	: 3.10 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 105 K
Rated speed	: 1755 rpm	Design	: B


Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	09/07/2026		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

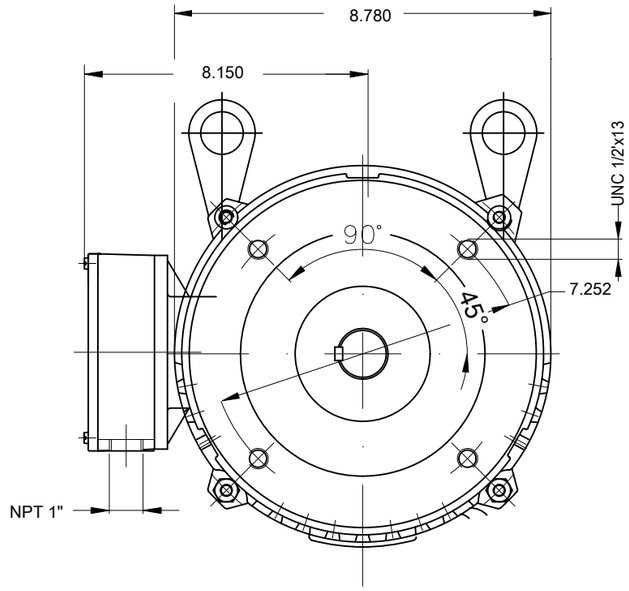

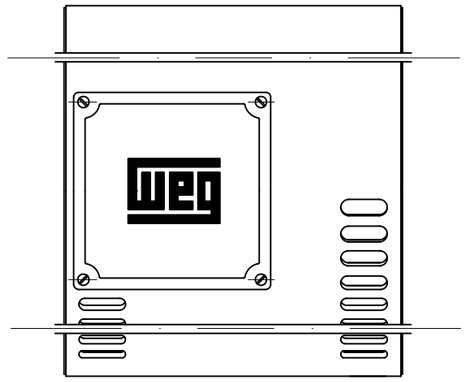




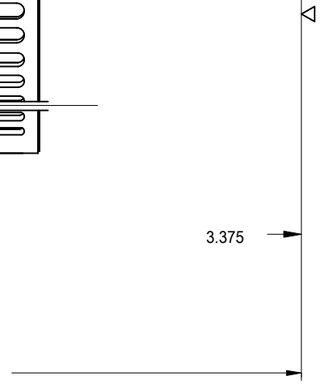

Packing - crate
Plastic flat plug
With drip cover
Color RAL 5009
Painting plan 207A
Mounting V18

DE Shaft End



7.5 HP 04 Poles 60 Hz — A

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER	THREE PH. MOTOR GENERAL HIGH EFF.	PREVIEW
CHECKED		FRAME 213/5TC IP21 ODP	WDD 00
RELEASED			
REL. DATE		WMO Jaragua do Sul Product Engineering	SHEET 1 / 1

Dimensions in inches

XME A3

WEG's property. Forbidden reproduction without previous authorization.