

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line	: W22 NEMA Premium Efficiency Three-Phase	Product code :	14893856		
Frame	: 143/5TD	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 24.4 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0049 kgm ²		
Design	: B				
Output [HP]	1	1	1	1	
Poles	4	4	4	4	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	2.94/1.47	1.71	1.65	1.63	
L. R. Amperes [A]	25.3/12.6	10.9	11.5	12.1	
LRC [A]	8.6x(Code M)	6.4x(Code J)	7.0x(Code K)	7.4x(Code K)	
No load current [A]	1.88/0.940	0.930	1.00	1.08	
Rated speed [RPM]	1760	1450	1455	1455	
Slip [%]	2.22	3.33	3.00	3.00	
Rated torque [kgfm]	0.412	0.501	0.499	0.499	
Locked rotor torque [%]	290	220	240	260	
Breakdown torque [%]	350	250	290	310	
Service factor	1.25	1.25	1.25	1.25	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	
Noise level ²	51.0 dB(A)	49.0 dB(A)	49.0 dB(A)	49.0 dB(A)	
Efficiency (%)	25%				
	50%	80.0	80.0	80.0	
	75%	84.0	82.5	82.5	
	100%	85.5	82.5	84.0	
Power Factor	25%				
	50%	0.55	0.62	0.58	
	75%	0.68	0.74	0.71	
	100%	0.75	0.81	0.78	
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	15.9	15.9	15.9	15.9
	P2 (0,5;1,0)	12.8	12.8	12.8	12.8
	P3 (0,25;1,0)	12.5	12.5	12.5	12.5
	P4 (0,9;0,5)	10.1	10.1	10.1	10.1
	P5 (0,5;0,5)	7.0	7.0	7.0	7.0
	P6 (0,5;0,25)	5.8	5.8	5.8	5.8
	P7 (0,25;0,25)	4.3	4.3	4.3	4.3
Bearing type	: Drive end : 6205 ZZ Non drive end : 6204 ZZ	Foundation loads			
Sealing	: V'Ring V'Ring	Max. traction	: 32 kgf		
Lubrication interval	: - -	Max. compression	: 56 kgf		
Lubricant amount	: - -				
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by			Page	Revision	
Date	20/10/2024		1 / 6		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 3.07A SF 1.15 SFA 3.54A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	20/10/2024		2 / 6	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 14893856

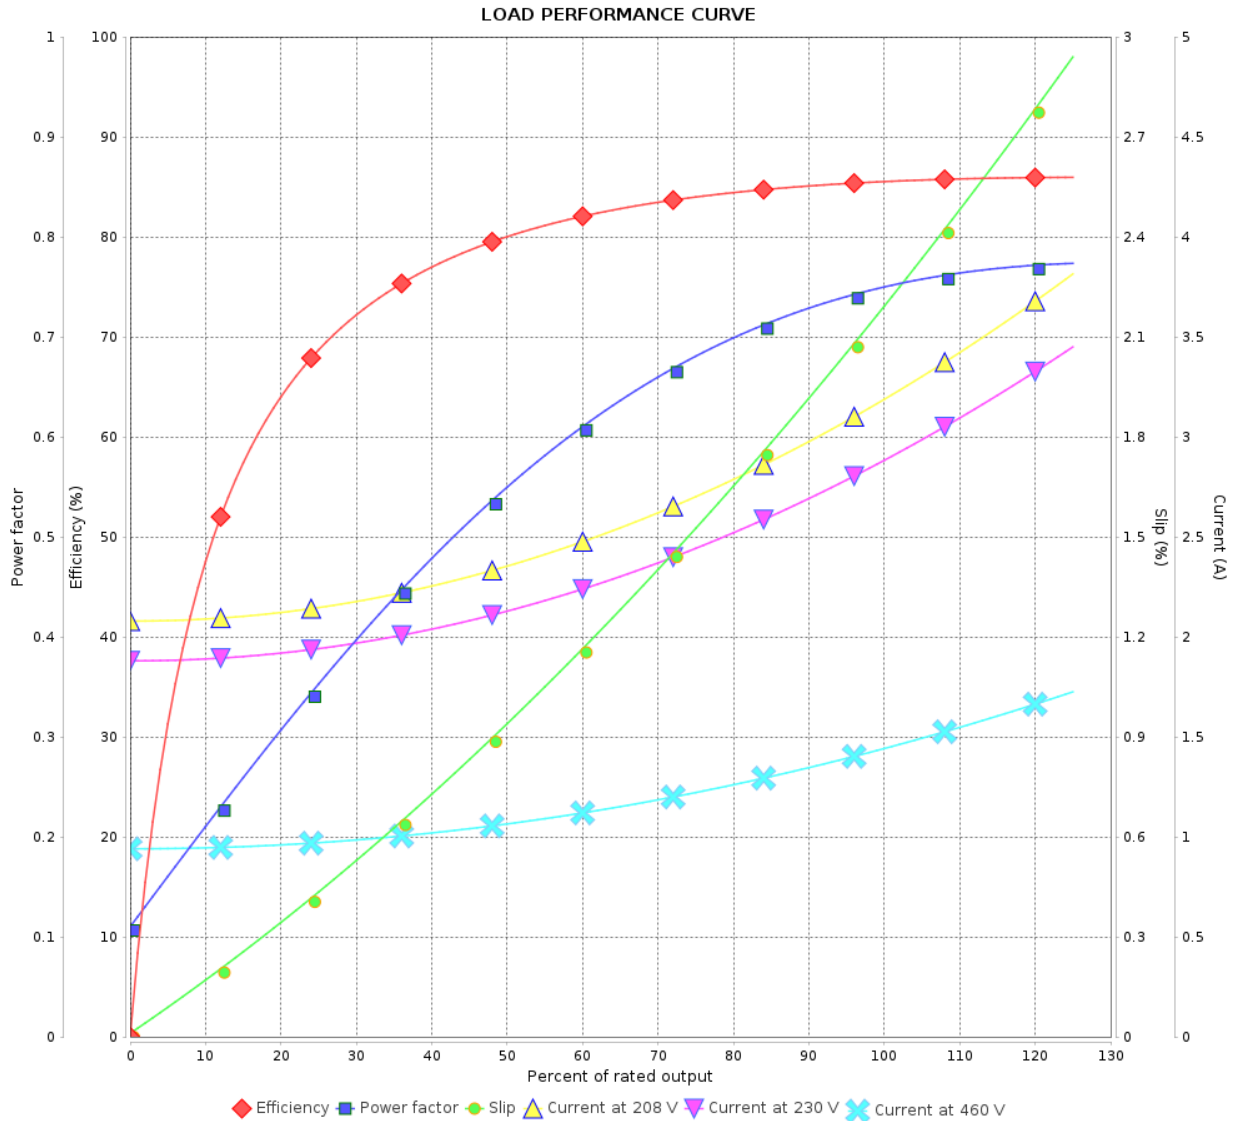

Performance : 230/460 V 60 Hz 4P

Rated current : 2.94/1.47 A
 LRC : 8.6
 Rated torque : 0.412 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 350 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.0049 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 6		
Date		20/10/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 14893856

LOAD PERFORMANCE CURVE

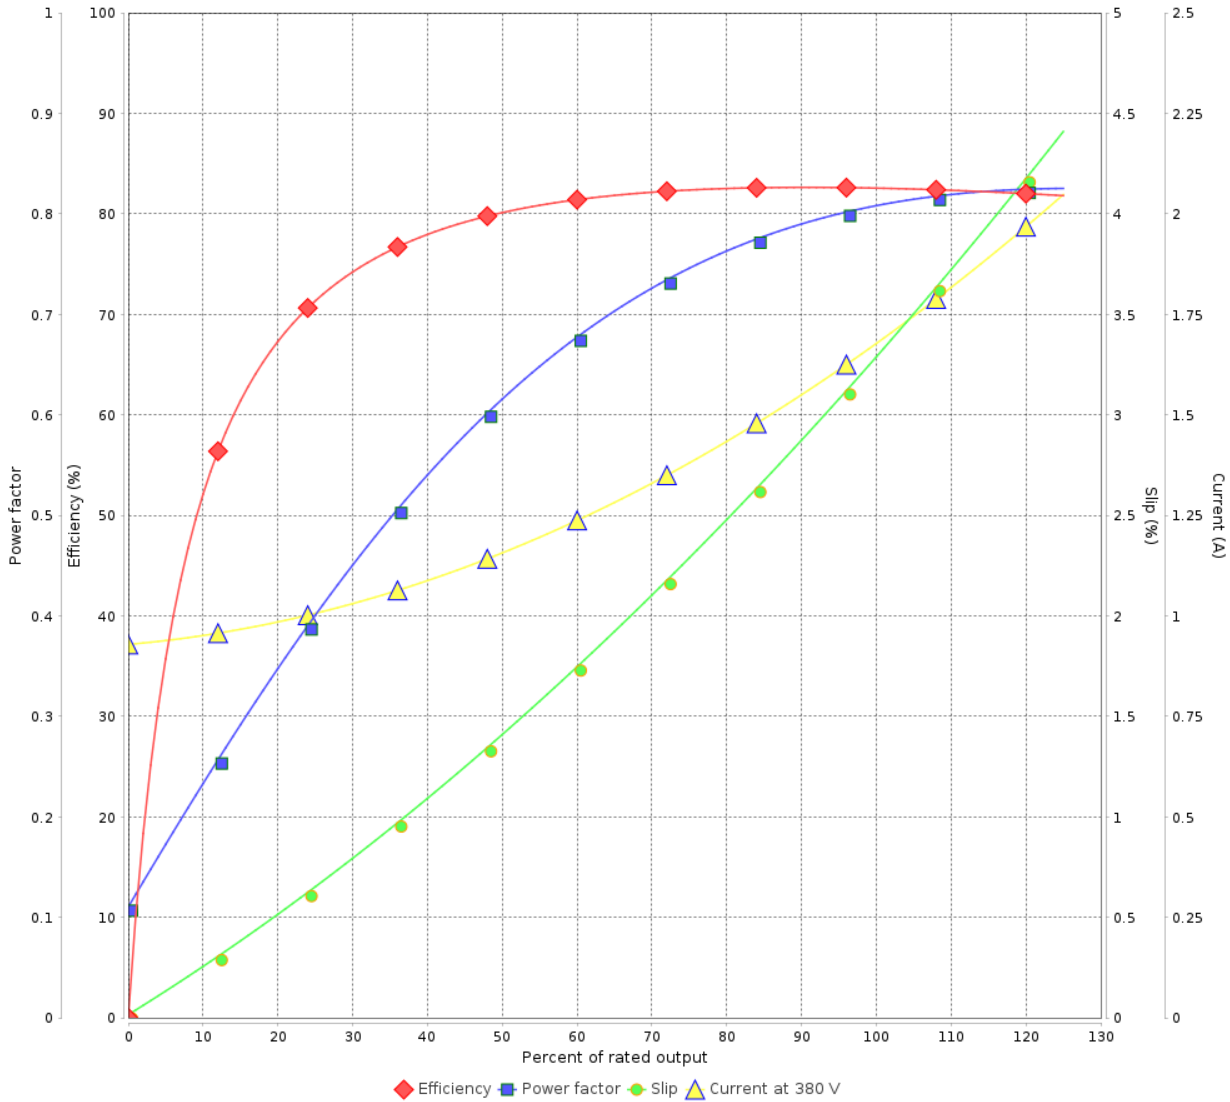

Performance : 380 V 50 Hz 4P IE3

Rated current	: 1.71 A	Moment of inertia (J)	: 0.0049 kgm ²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 0.501 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1450 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 6	Revision
Checked by				
Date	20/10/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 14893856

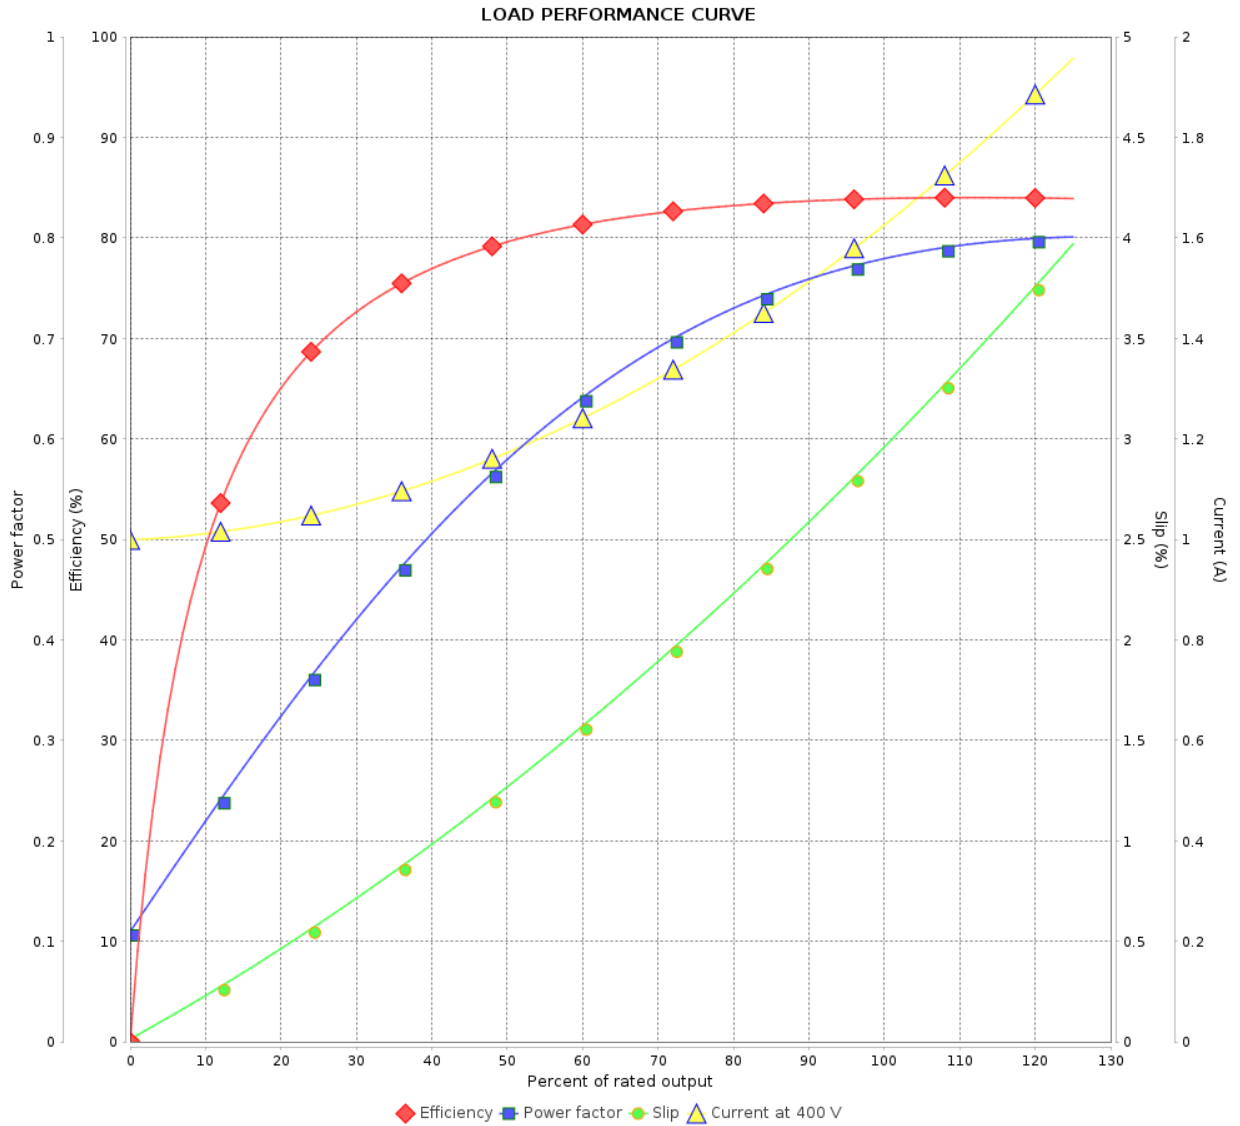

Performance : 400 V 50 Hz 4P IE3

Rated current	: 1.65 A	Moment of inertia (J)	: 0.0049 kgm ²
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 0.499 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.25
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 1455 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			5 / 6	
Date	20/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 14893856


LOAD PERFORMANCE CURVE

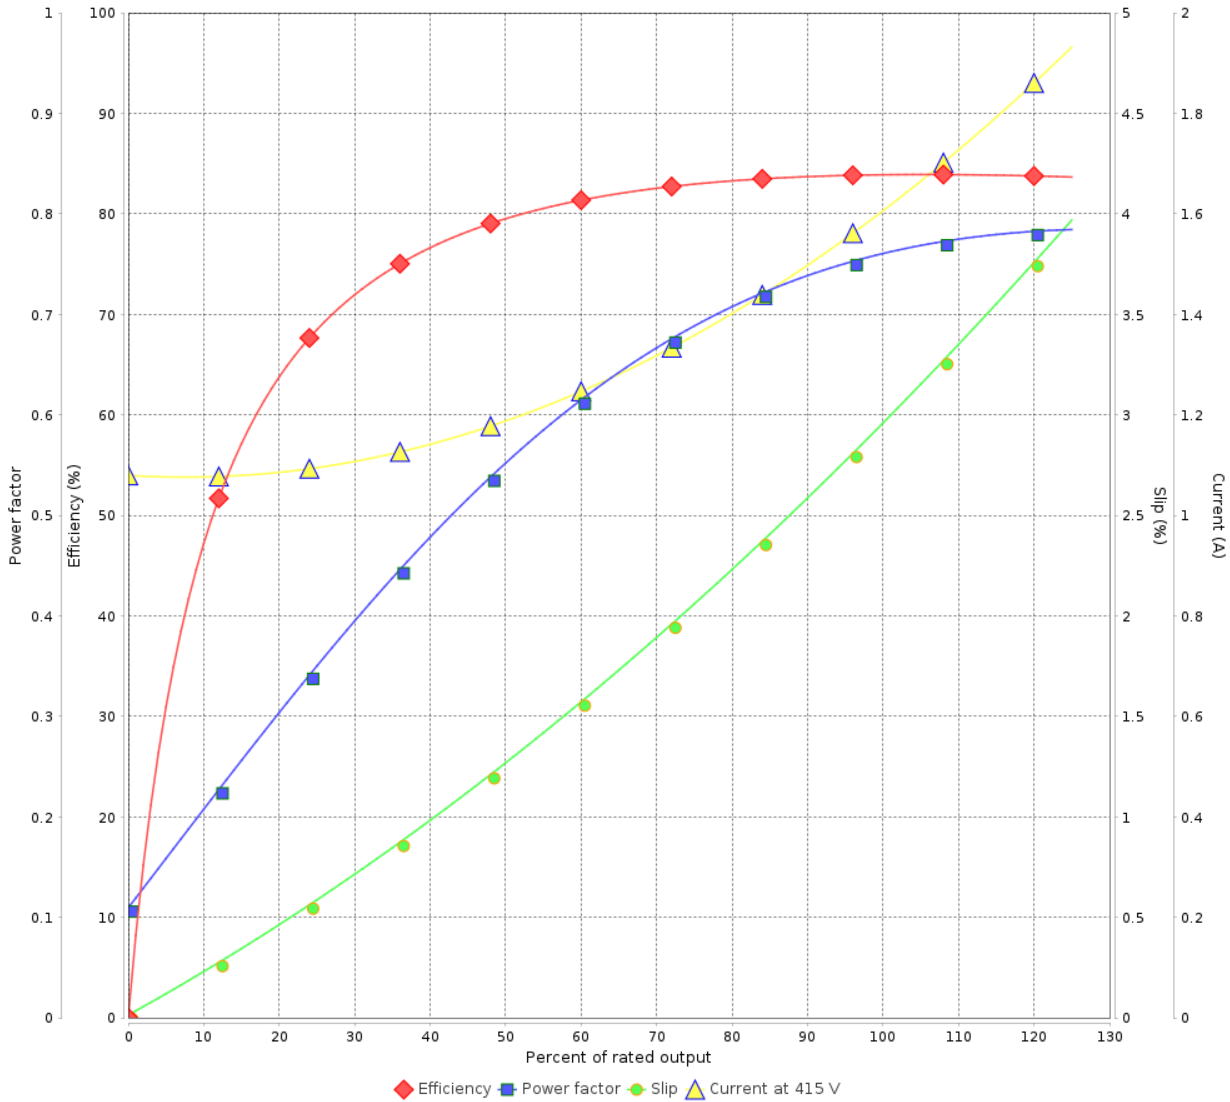


Performance : 415 V 50 Hz 4P IE3

Rated current	: 1.63 A	Moment of inertia (J)	: 0.0049 kgm ²
LRC	: 7.4	Duty cycle	: Cont.(S1)
Rated torque	: 0.499 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.25
Breakdown torque	: 310 %	Temperature rise	: 80 K
Rated speed	: 1455 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		6 / 6		
Date	20/10/2024			

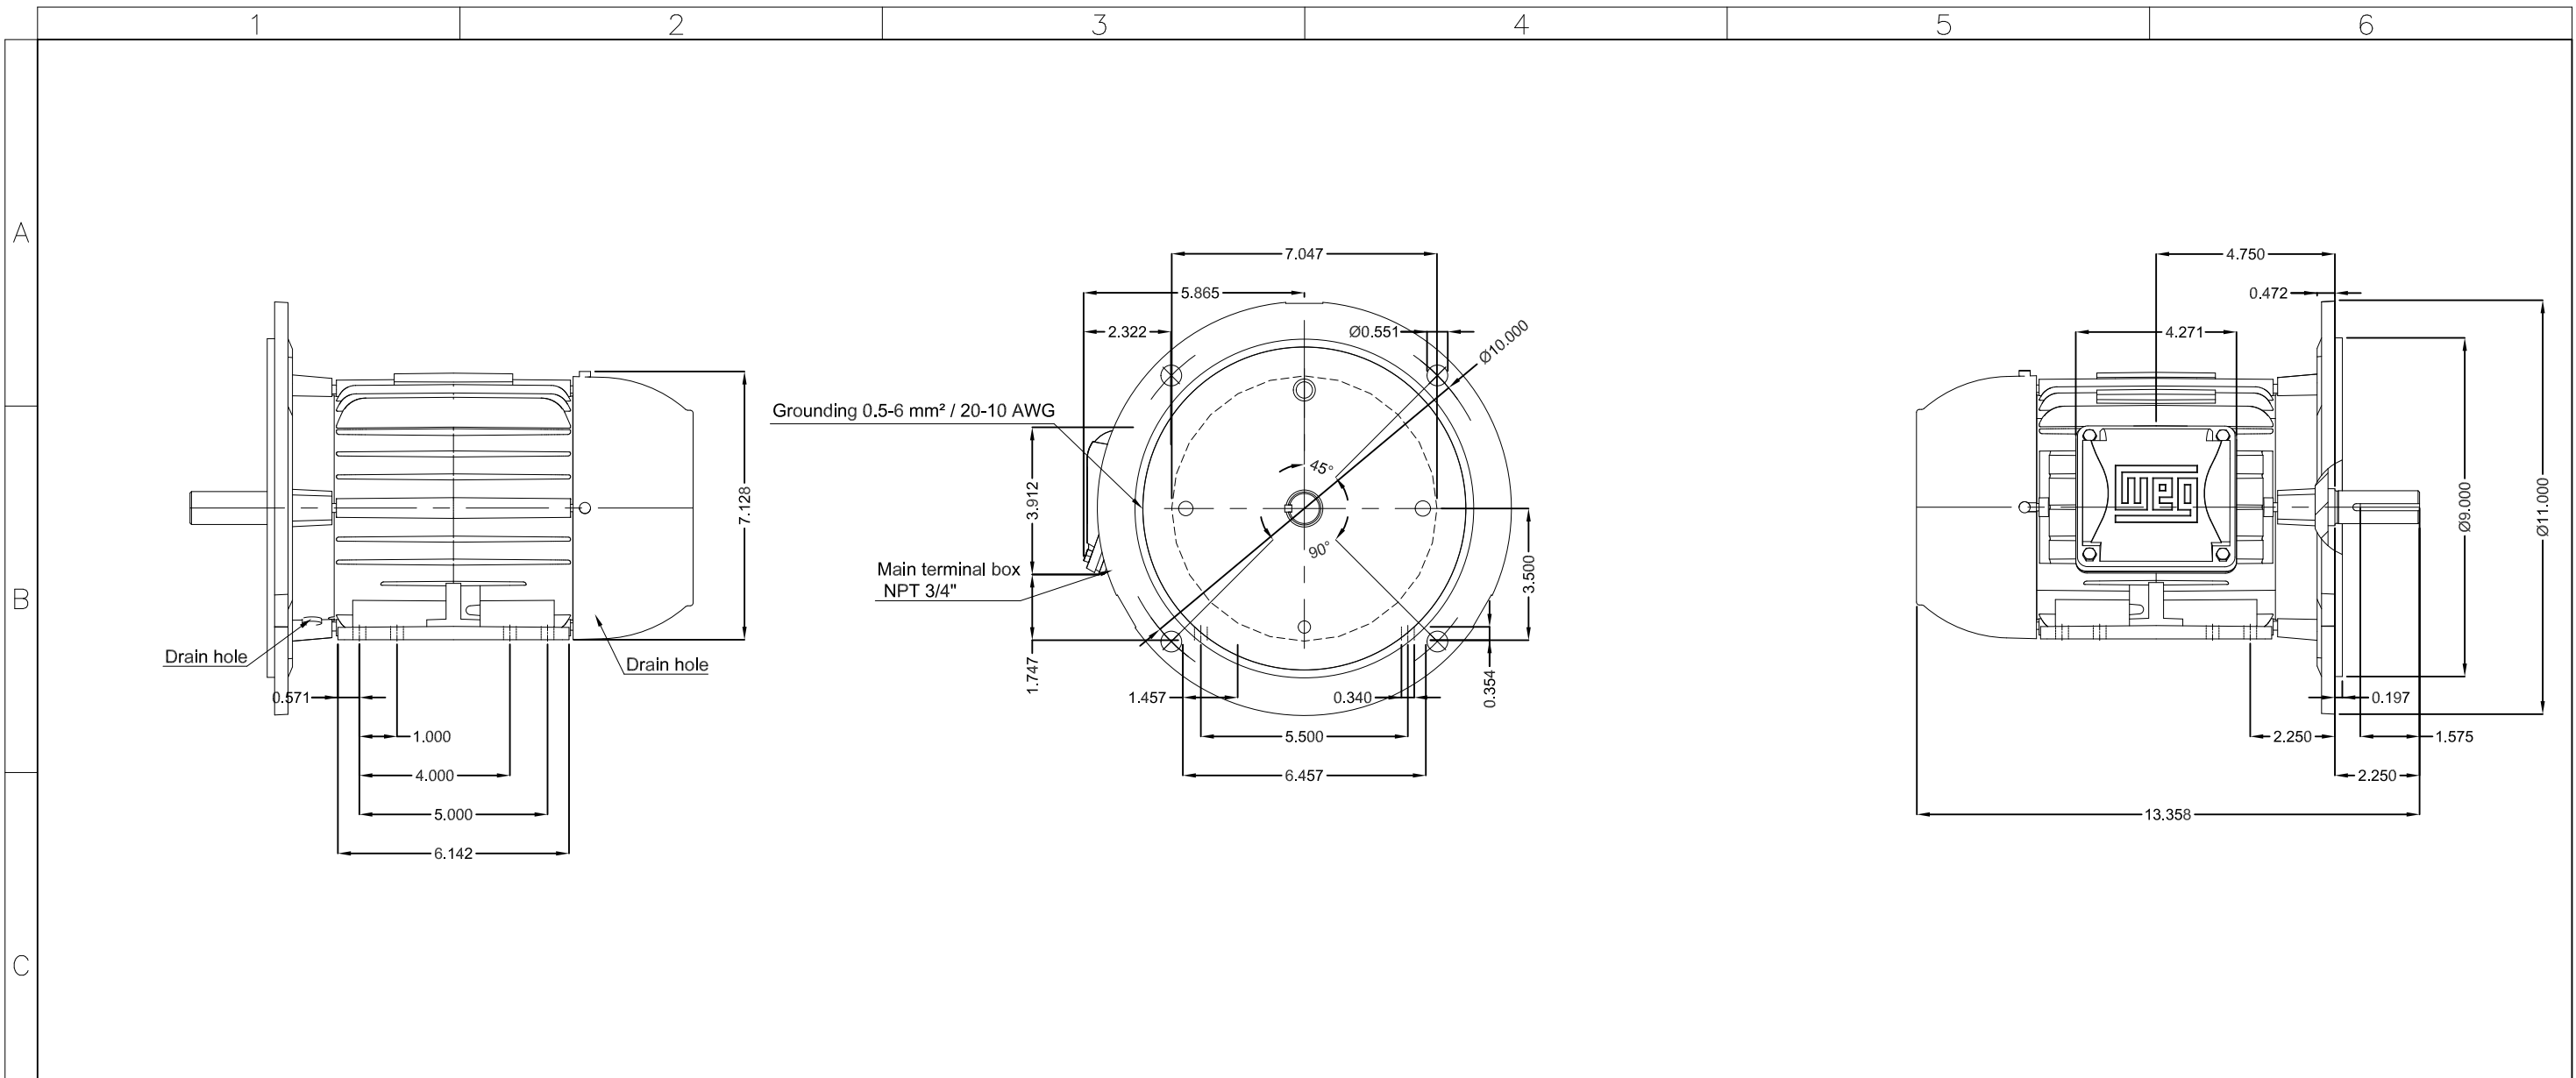

Color RAL 5009
 Painting plan 207A
 Mounting NEMA F-1
 Mounting B35R(D)

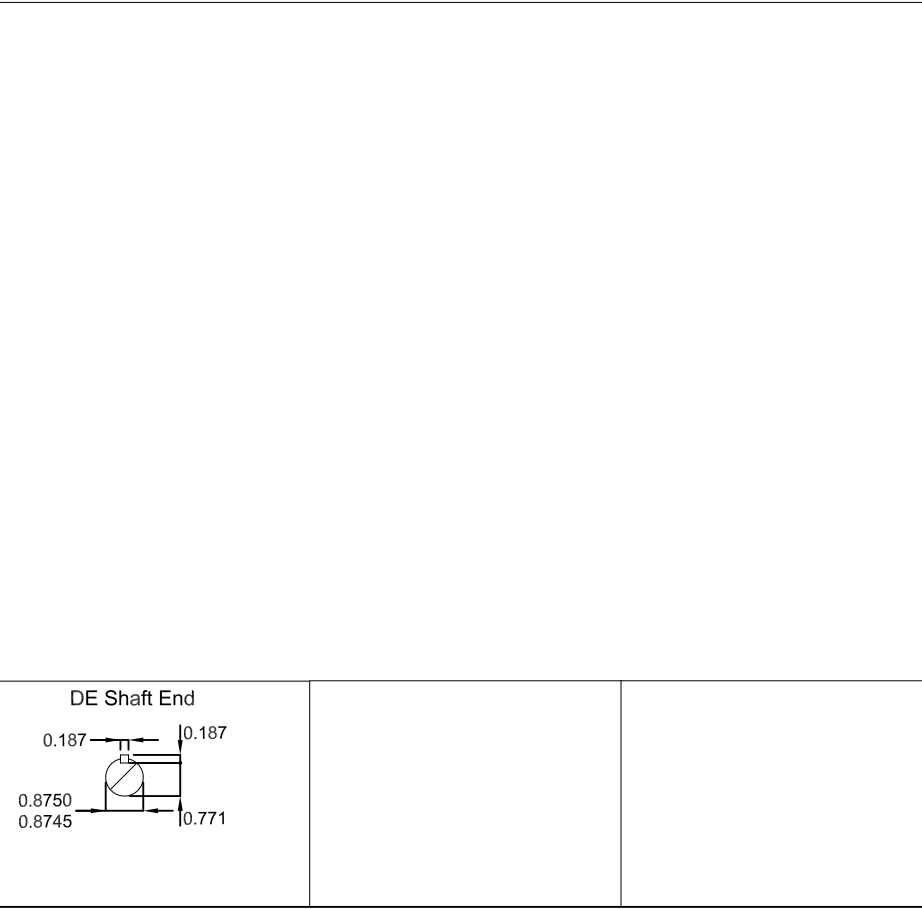

1 HP 04 Poles 60 Hz										A	
HYBRISUSER										00	
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 NEMA PREM. EFF.					PREVIEW WDD 00 SHEET /				
CHECKED		FRAME 143/5TD IP55 TEFC									
RELEASED											
REL. DATE											