DATA SHEET

Three Phase Induction Motor - Squirrel Cage

:



Product line		: General High Efficiency Three- Product code : Phase				11996330	
Frame Output Poles Frequency Rated voltage Rated current L. R. Amperes LRC No load current Rated speed Slip Rated torque Locked rotor tord Breakdown torqu Insulation class Service factor Moment of inerti Design	que ue a (J)	: 213/5TC : 10 HP (7 : 2 : 60 Hz : 575 V : 9.76 A : 64.4 A : 6.6x(Coc : 3.36 A : 3515 rpn : 2.36 % : 2.06 kgfr : 210 % : 250 % : F : 1.15 : 0.0187 k : B	.5 kW) le H) n	Tempera Duty cyc Ambient Altitude	le temperature n degree method ¹ /el ² method	: 21s (cold) : 80 K : Cont.(S1) : -20°C to + : 1000 m.a. : IP21 : IC01 - OD : F-1 : Both (CW : 68.0 dB(A : Direct On : 47.3 kg	40°C s.l. P and CCW)
Output	50%	75%	100%	Foundatio	on loads		
Efficiency (%)	87.5	88.5	88.5	Max. trac		: 71 kgf	
Power Factor	0.71	0.81	0.87	Max. com	pression	: 119 kgf	
Sealing : Without Bearing Seal Lubrication interval : - Lubricant amount : - Lubricant type : Mo Notes					Without Bearing - -	Seal	
Notes			MO	bil Polyrex	EM		
This revision repl nust be eliminate 1) Looking the n 2) Measured at	ed. notor from the s 1m and with tol	shaft end. erance of	ious one, which +3dB(A).	These ar	EM re average values ipply, subject to th		
This revision repl must be eliminate (1) Looking the m (2) Measured at (3) Approximate manufacturing pr (4) At 100% of fu	ed. notor from the s 1m and with tol weight subject ocess.	shaft end. erance of to changes	ious one, which +3dB(A). s after	These ar	e average values	e tolerances stip	ulated in NEMA
This revision repl must be eliminate (1) Looking the n (2) Measured at (3) Approximate manufacturing pr	ed. notor from the s 1m and with tol weight subject ocess.	shaft end. erance of to changes	ious one, which +3dB(A).	These ar	e average values		
This revision repl nust be eliminate (1) Looking the n (2) Measured at (3) Approximate manufacturing pr (4) At 100% of fu Rev.	ed. notor from the s 1m and with tol weight subject rocess.	shaft end. erance of to changes	ious one, which +3dB(A). s after	These ar	e average values	e tolerances stip	ulated in NEMA
This revision repl must be eliminate (1) Looking the m (2) Measured at (3) Approximate manufacturing pr (4) At 100% of fu Rev. Performed by	ed. notor from the s 1m and with tol weight subject rocess.	shaft end. erance of to changes	ious one, which +3dB(A). s after	These ar	e average values	e tolerances stip	ulated in NEMA
This revision repl nust be eliminate 1) Looking the m 2) Measured at 3) Approximate nanufacturing pr 4) At 100% of fu Rev.	ed. notor from the s 1m and with tol weight subject rocess.	shaft end. erance of to changes	ious one, which +3dB(A). s after	These ar	e average values	e tolerances stip	ulated in NEMA

ШЕ

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

Subject to change without notice


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

:




Customer

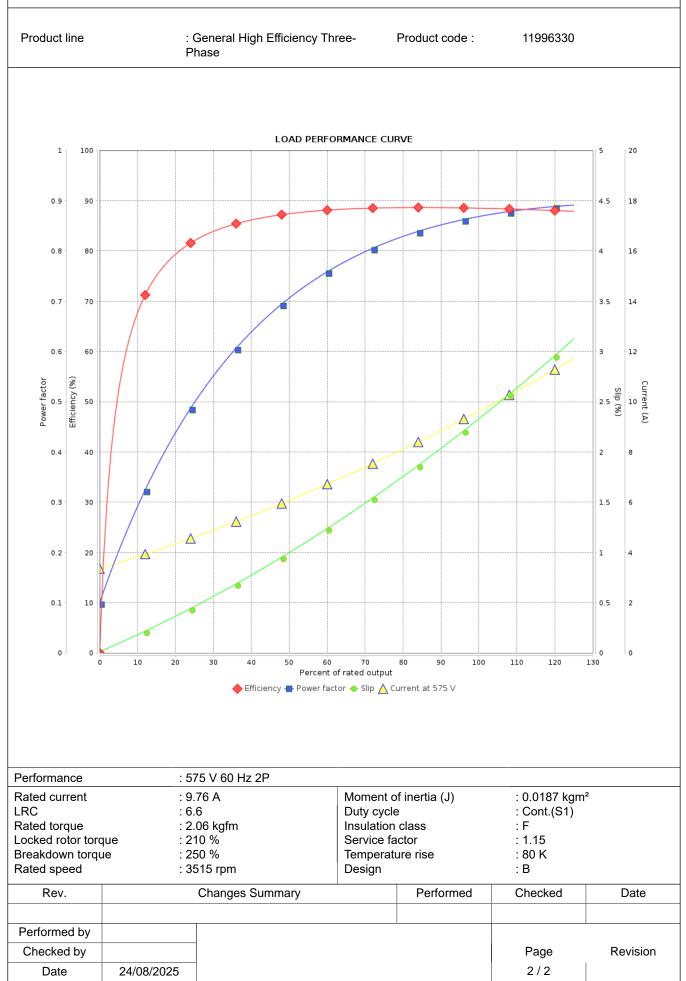

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

Subject to change without notice

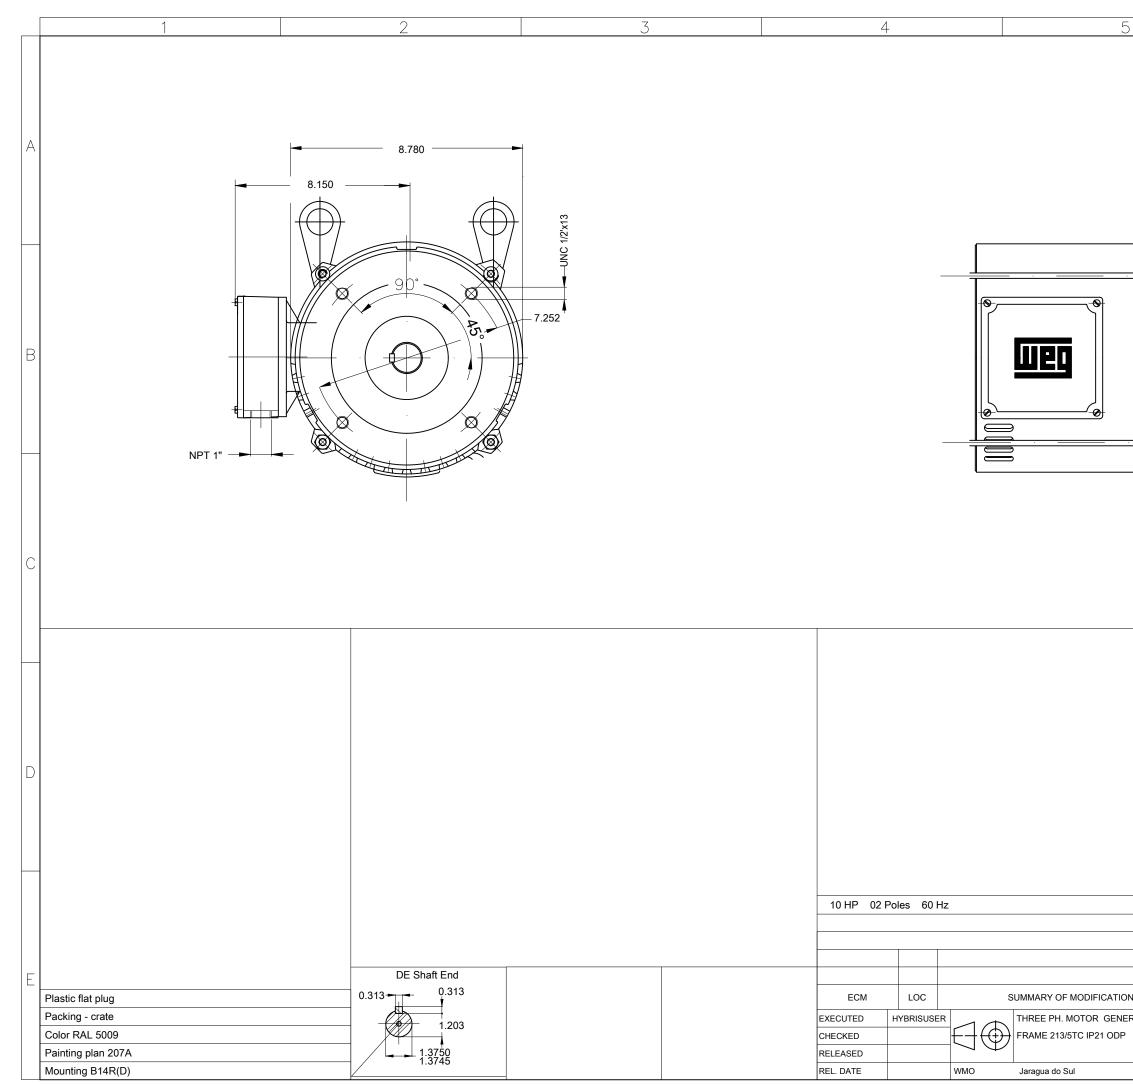

WEG's property. Forbidden reproduction without previous authorization.

-	6	
	A	Dimensions in inches
HYBRIS DNS EXECU		
ERAL HIGH EFF.		A3
Product Enginee		XME A