

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Single-Phase		Product code : 13386539		
Frame : W56C Insulation class : F Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Design : N		Cooling method : IC411 - TEFC Mounting : F-1 Rotation ¹ : Both (CW and CCW) Starting method : Direct On Line Approx. weight ³ : 8.7 kg Moment of inertia (J) : 0.0017 kgm²		
Output [HP]	0.33			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	115/208-230			
Rated current [A]	6.00/3.32-3.00			
L. R. Amperes [A]	33.6/18.6-16.8			
LRC [A]	5.6x(Code N)			
No load current [A]	5.40/2.33-2.70			
Rated speed [RPM]	1735			
Slip [%]	3.61			
Rated torque [kgfm]	0.138			
Locked rotor torque [%]	320			
Breakdown torque [%]	280			
Service factor				
Temperature rise	80 K			
Locked rotor time	21s (cold) 12s (hot)			
Noise level ²	52.0 dB(A)			
Efficiency (%)	25%			
	50%	46.0		
	75%	55.0		
	100%	61.0		
Power Factor	25%			
	50%	0.42		
	75%	0.51		
	100%	0.59		
Bearing type : Drive end 6203 ZZ Non drive end 6202 ZZ Sealing : V'Ring V'Ring Lubrication interval : - - Lubricant amount : - - Lubricant type : Mobil Polyrex EM		Foundation loads Max. traction : 7 kgf Max. compression : 16 kgf		
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by				
Date	13/05/2022		Page 1 / 2	Revision

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Single-Phase

Product code : 13386539

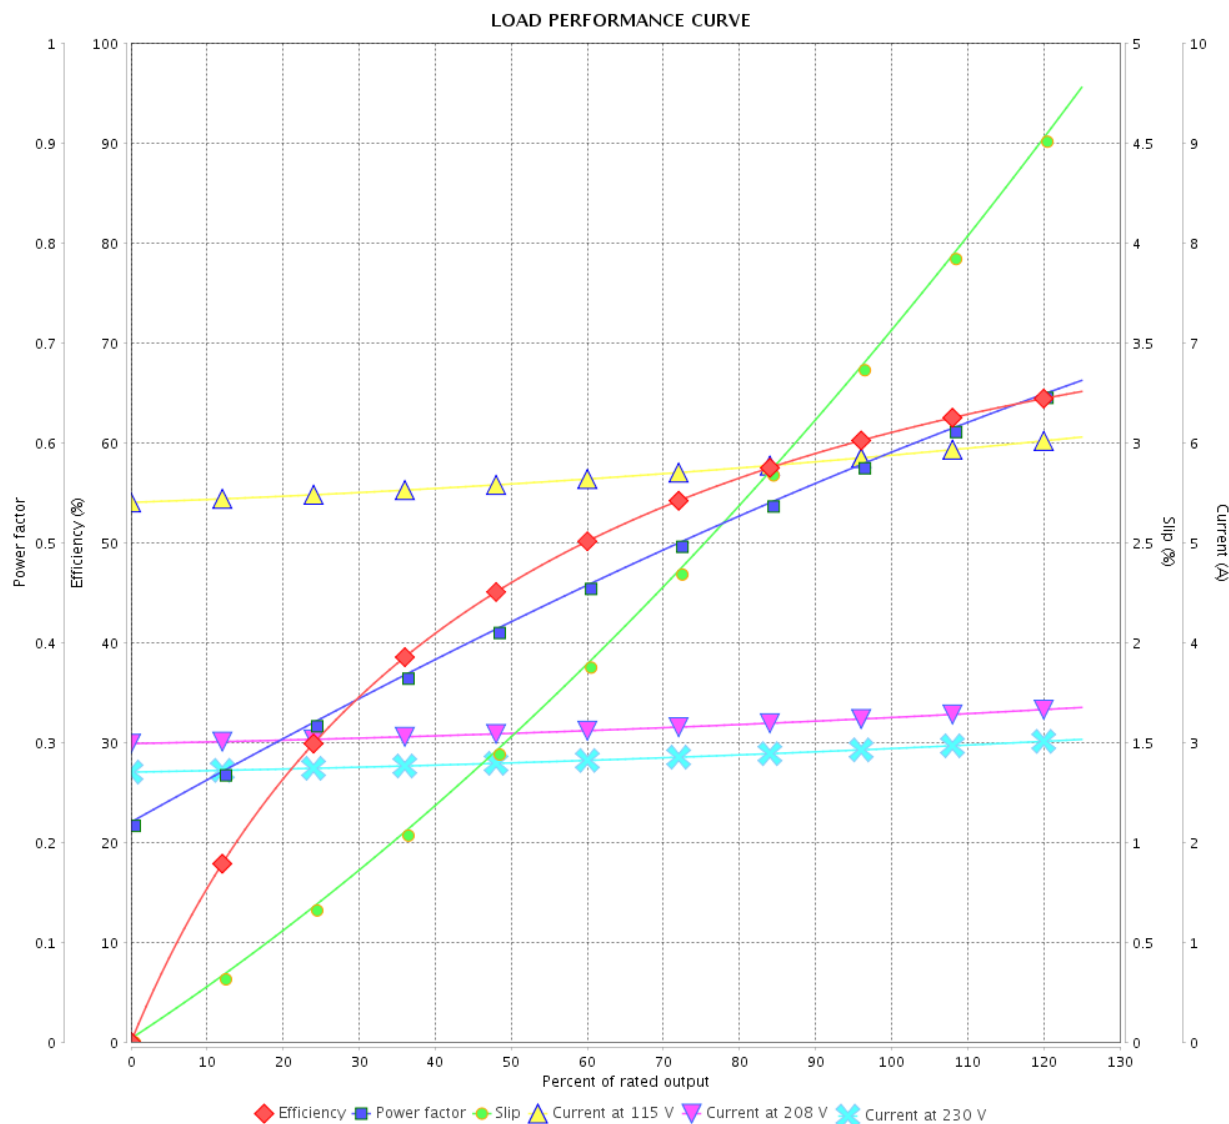

Performance : 115/208-230 V 60 Hz 4P

Rated current : 6.00/3.32-3.00 A
 LRC : 5.6
 Rated torque : 0.138 kgfm
 Locked rotor torque : 320 %
 Breakdown torque : 280 %
 Rated speed : 1735 rpm

Moment of inertia (J) : 0.0017 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 2 / 2
Checked by				
Date				
	13/05/2022			Revision

