

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel NEMA Premium Efficiency Three-Phase Product code : 12674695

| | | | |
|-----------------------|---------------------------|-----------------------------|------------------------|
| Frame | : 213/5TC | Locked rotor time | : 25s (cold) 14s (hot) |
| Output | : 15 HP (11 kW) | Temperature rise | : 80 K |
| Poles | : 2 | Duty cycle | : Cont.(S1) |
| Frequency | : 60 Hz | Ambient temperature | : -20°C to +40°C |
| Rated voltage | : 575 V | Altitude | : 1000 m.a.s.l. |
| Rated current | : 14.1 A | Cooling method | : IC01 - ODP |
| L. R. Amperes | : 95.7 A | Mounting | : F-1 |
| LRC | : 6.8x(Code H) | Rotation ¹ | : Both (CW and CCW) |
| No load current | : 5.84 A | Noise level ² | : 66.0 dB(A) |
| Rated speed | : 3525 rpm | Starting method | : Direct On Line |
| Slip | : 2.08 % | Approx. weight ³ | : 61.1 kg |
| Rated torque | : 3.09 kgfm | | |
| Locked rotor torque | : 229 % | | |
| Breakdown torque | : 280 % | | |
| Insulation class | : F | | |
| Service factor | : 1.15 | | |
| Moment of inertia (J) | : 0.0232 kgm ² | | |
| Design | : B | | |

| | | | | | |
|----------------|------|------|------|------------------|-----------|
| Output | 50% | 75% | 100% | Foundation loads | |
| Efficiency (%) | 90.0 | 90.1 | 90.2 | Max. traction | : 129 kgf |
| Power Factor | 0.72 | 0.82 | 0.87 | Max. compression | : 190 kgf |

| | | | |
|----------------------|---|----------------------|----------------------|
| | | <u>Drive end</u> | <u>Non drive end</u> |
| Bearing type | : | 6208 ZZ | 6206 ZZ |
| Sealing | : | Without Bearing Seal | Without Bearing Seal |
| Lubrication interval | : | - | - |
| Lubricant amount | : | - | - |
| Lubricant type | : | Mobil Polyrex EM | |

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|---------------------------|---------|------|
| | | | | |
| Performed by | | Page 1 / 2 Revision | | |
| Checked by | | | | |
| Date | 27/09/2025 | | | |

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel NEMA Premium
Efficiency Three-Phase

Product code : 12674695

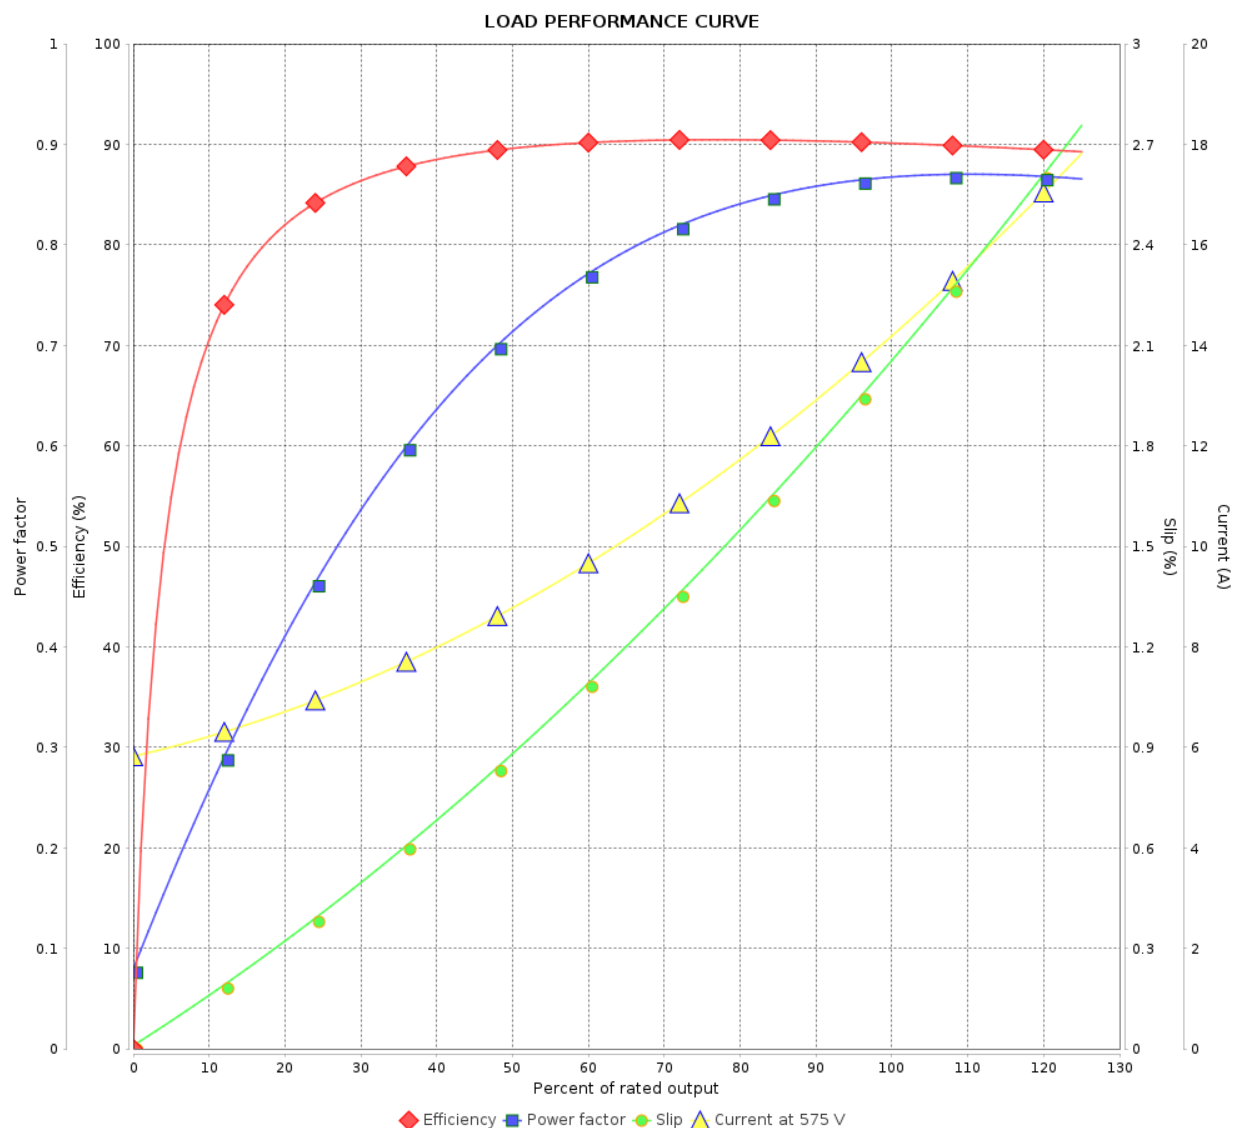

Performance : 575 V 60 Hz 2P

Rated current : 14.1 A
LRC : 6.8
Rated torque : 3.09 kgfm
Locked rotor torque : 229 %
Breakdown torque : 280 %
Rated speed : 3525 rpm

Moment of inertia (J) : 0.0232 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

| Rev. | Changes Summary | | Performed | Checked | Date |
|--------------|-----------------|--|-----------|---------|----------|
| | | | | | |
| Performed by | | | | Page | Revision |
| Checked by | | | | 2 / 2 | |
| Date | | | | | |

