

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer	:			
Product line	: NEMA Premium Efficiency Three-Phase	Product code : 12675412		
Frame	: 182/4T	Cooling method : IC411 - TEFC		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation ¹ : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³ : 37.1 kg		
Protection degree	: IP55	Moment of inertia (J) : 0.0144 kgm ²		
Design	: B			
Output [HP]		2		
Poles		6		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		2.40		
L. R. Amperes [A]		18.0		
LRC [A]		7.5x(Code K)		
No load current [A]		1.50		
Rated speed [RPM]		1170		
Slip [%]		2.50		
Rated torque [kgfm]		1.24		
Locked rotor torque [%]		260		
Breakdown torque [%]		370		
Service factor		1.15		
Temperature rise		80 K		
Locked rotor time		79s (cold) 44s (hot)		
Noise level ²		52.0 dB(A)		
Efficiency (%)	25%	82.0		
	50%	84.0		
	75%	86.5		
	100%	88.5		
Power Factor	25%	0.28		
	50%	0.50		
	75%	0.62		
	100%	0.71		
Bearing type	: <u>Drive end</u> 6206 ZZ <u>Non drive end</u> 6205 ZZ	Foundation loads		
Sealing	: V'Ring Without Bearing Seal	Max. traction : 77 kgf		
Lubrication interval	: - -	Max. compression : 114 kgf		
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>		<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/05/2022		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 12675412

LOAD PERFORMANCE CURVE

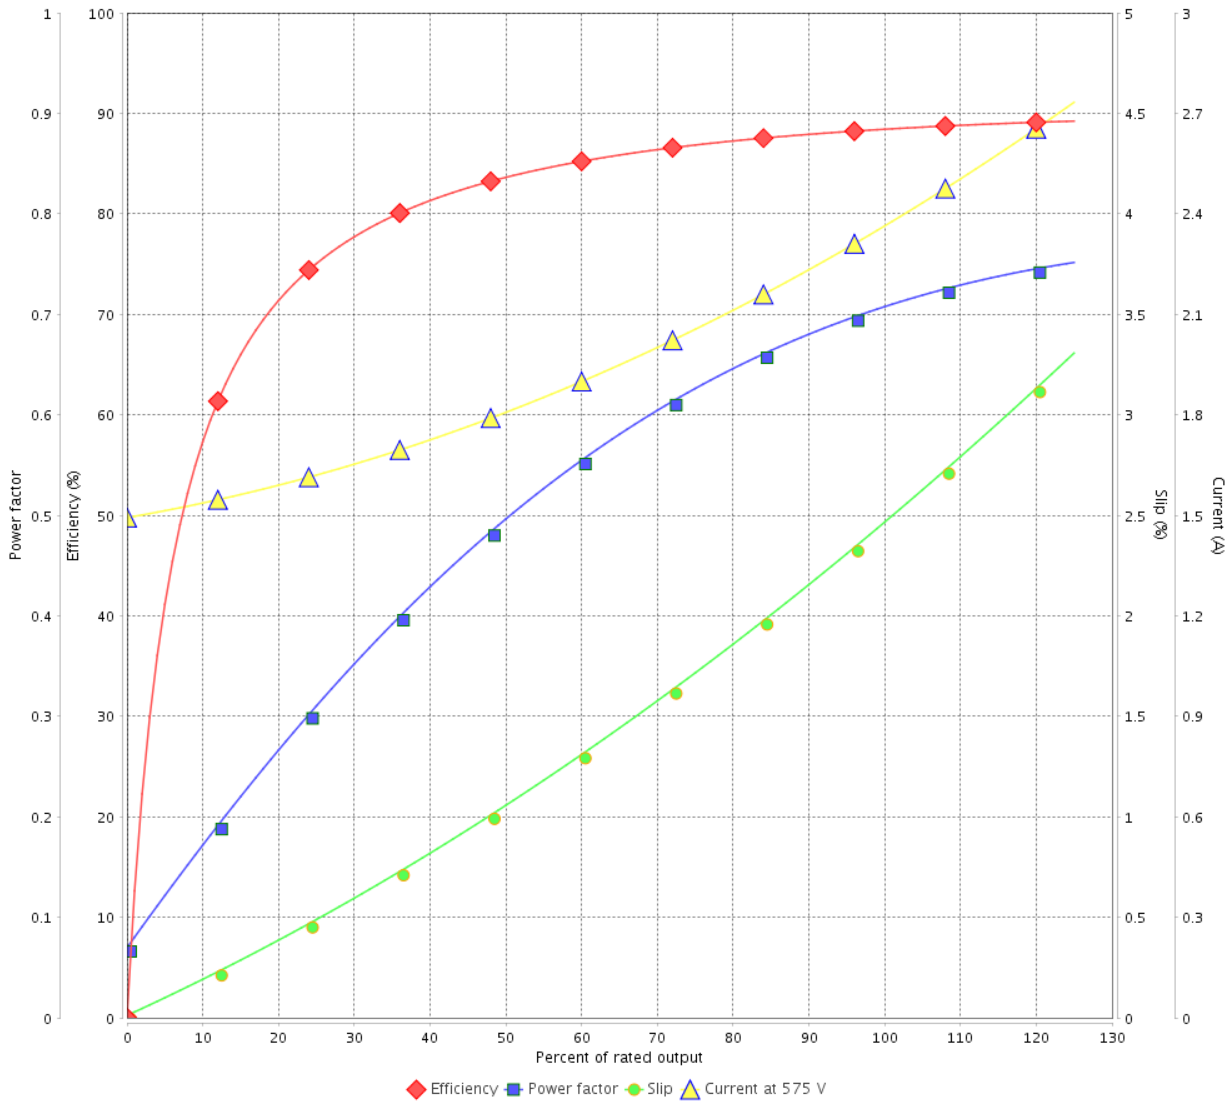

Performance : 575 V 60 Hz 6P

Rated current	: 2.40 A	Moment of inertia (J)	: 0.0144 kgm ²
LRC	: 7.5	Duty cycle	: Cont.(S1)
Rated torque	: 1.24 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.15
Breakdown torque	: 370 %	Temperature rise	: 80 K
Rated speed	: 1170 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 2		
Date	13/05/2022			





A

B

C

D

E

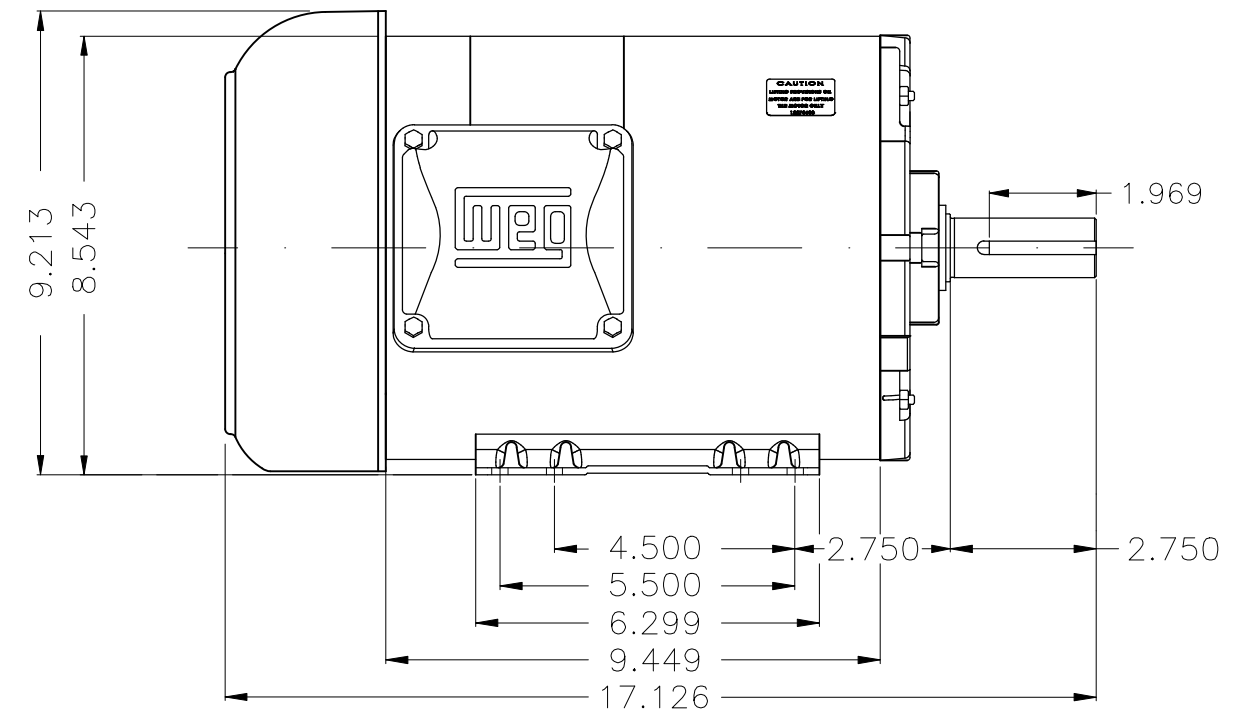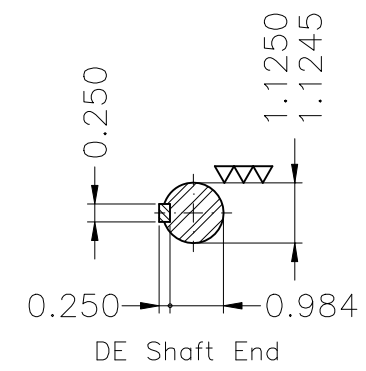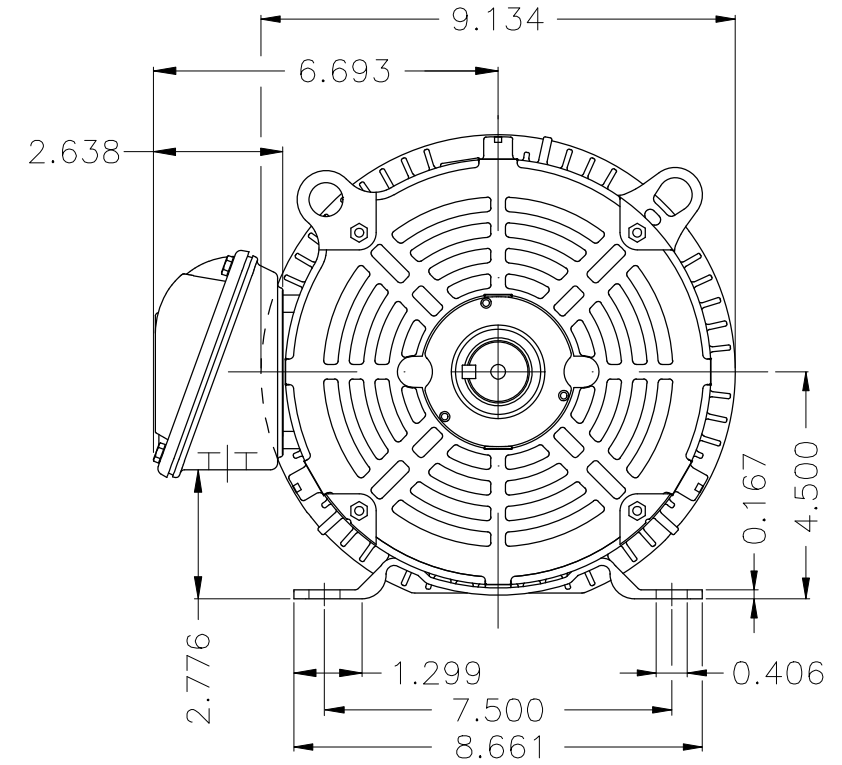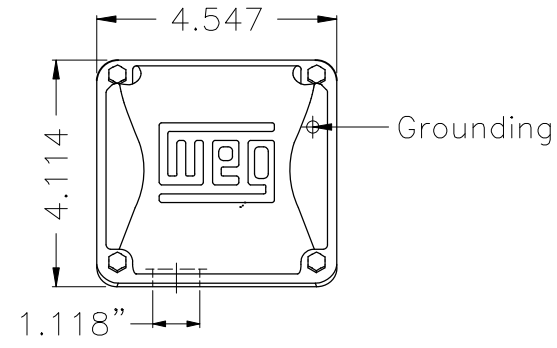

Color Munsell N 1 matte black									
Painting plan 207N									
Mounting F-1/B3R(D)									
					HYBRISUSER	00			
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF.				PREVIEW WDD 00			
CHECKED		FRAME 182/4T IP55 TEFC							
RELEASED									
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1			

2 HP 06 Poles 60 Hz

A