

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :		
Product line	: NEMA Premium Efficiency Three-Phase	
Product code :	13373095	
Frame	: 143/5T	
Insulation class	: F	
Duty cycle	: Cont.(S1)	
Ambient temperature	: -20°C to +40°C	
Altitude	: 1000 m.a.s.l.	
Protection degree	: IP55	
Design	: B	
Cooling method	: IC411 - TEFC	
Mounting	: F-1	
Rotation ¹	: Both (CW and CCW)	
Starting method	: Direct On Line	
Approx. weight ³	: 22.4 kg	
Moment of inertia (J)	: 0.0070 kgm ²	
Output [HP]	3	
Poles	2	
Frequency [Hz]	60	
Rated voltage [V]	230/460	
Rated current [A]	7.02/3.51	
L. R. Amperes [A]	66.7/33.3	
LRC [A]	9.5x(Code K)	
No load current [A]	2.56/1.28	
Rated speed [RPM]	3500	
Slip [%]	2.78	
Rated torque [kgfm]	0.622	
Locked rotor torque [%]	300	
Breakdown torque [%]	380	
Service factor	1.15	
Temperature rise	80 K	
Locked rotor time	18s (cold) 10s (hot)	
Noise level ²	68.0 dB(A)	
Efficiency (%)	25%	
	50%	84.0
	75%	86.5
	100%	86.5
Power Factor	25%	
	50%	0.78
	75%	0.87
	100%	0.91
Bearing type	: <u>Drive end</u> 6205 ZZ <u>Non drive end</u> 6203 ZZ	
Sealing	: V'Ring Without Bearing Seal	
Lubrication interval	: - -	
Lubricant amount	: - -	
Lubricant type	: Mobil Polyrex EM	
Foundation loads	Max. traction : 62 kgf	
	Max. compression : 84 kgf	
Notes USABLE @208V 7.76A SF 1.00 SFA 7.76A		
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		
These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	
Performed by	Performed	
Checked by	Checked	
Date	13/05/2022	
Page	1 / 4	
Revision		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 13373095

LOAD PERFORMANCE CURVE

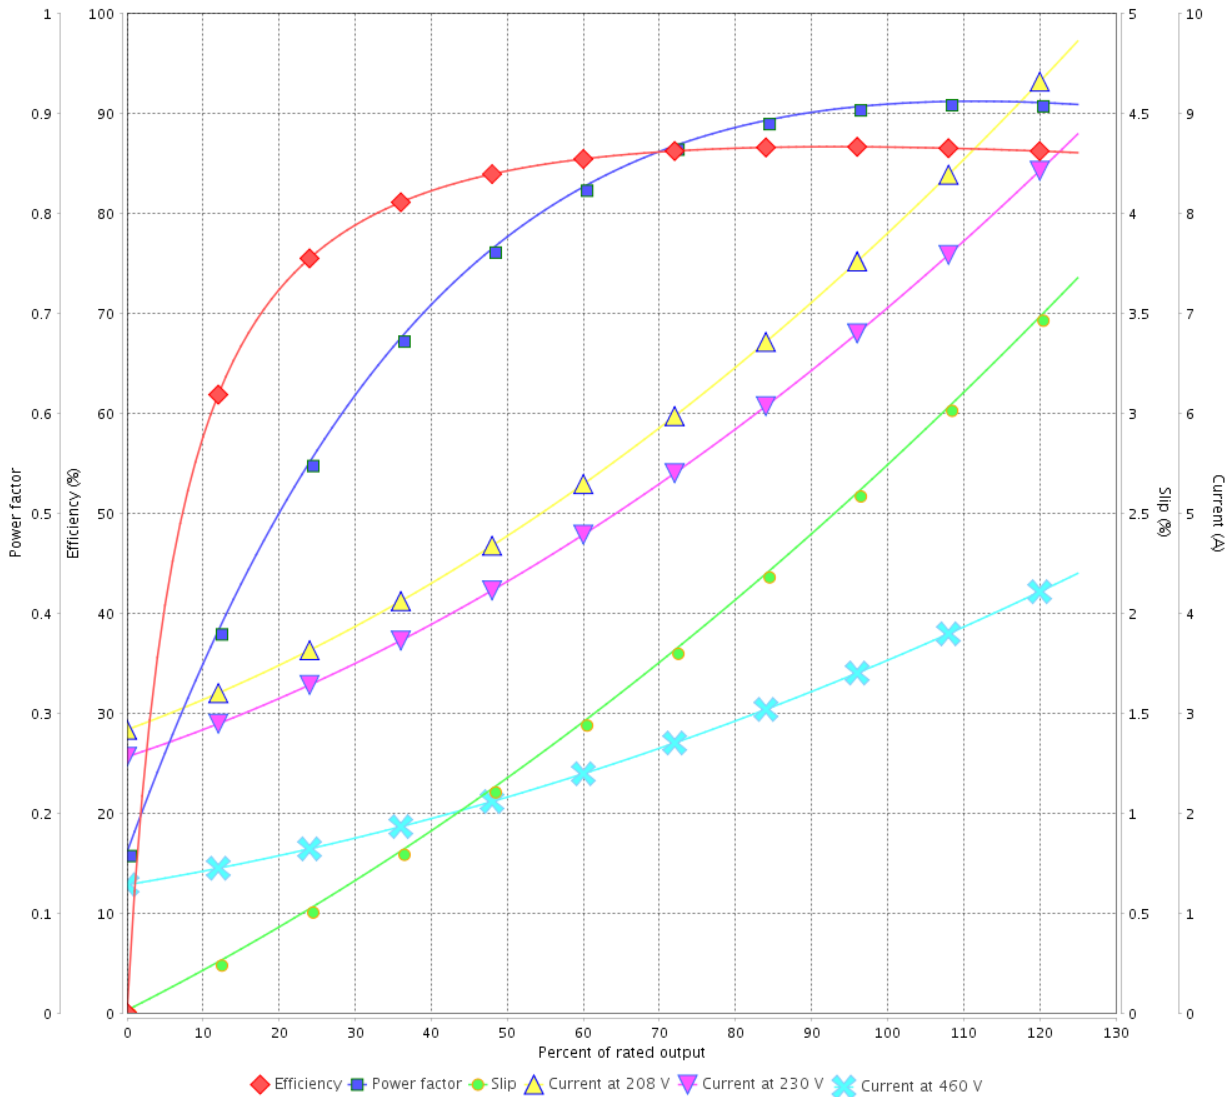

Performance : 230/460 V 60 Hz 2P

Rated current : 7.02/3.51 A
 LRC : 9.5
 Rated torque : 0.622 kgfm
 Locked rotor torque : 300 %
 Breakdown torque : 380 %
 Rated speed : 3500 rpm

Moment of inertia (J) : 0.0070 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 4	Revision
Checked by				
Date	13/05/2022			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : NEMA Premium Efficiency Three-Phase Product code : 13373095

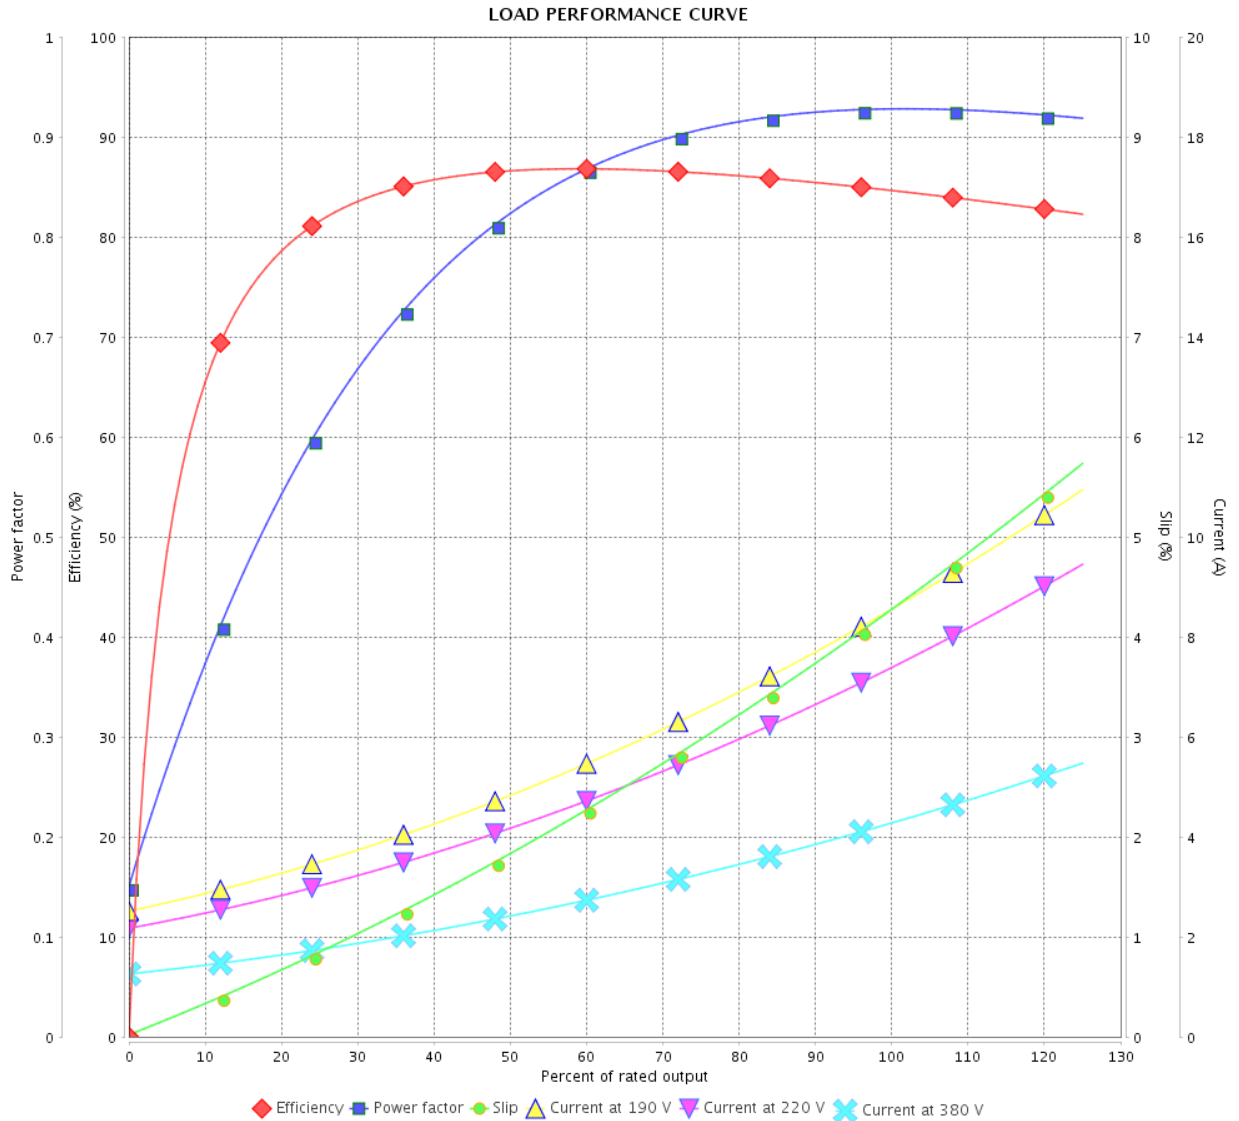

Performance : 190-220/380 V 50 Hz 2P

Rated current : 8.50-7.34/4.25 A
 LRC : 7.4
 Rated torque : 0.759 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 280 %
 Rated speed : 2870 rpm

Moment of inertia (J) : 0.0070 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : NEMA Premium Efficiency Three-Phase Product code : 13373095


LOAD PERFORMANCE CURVE

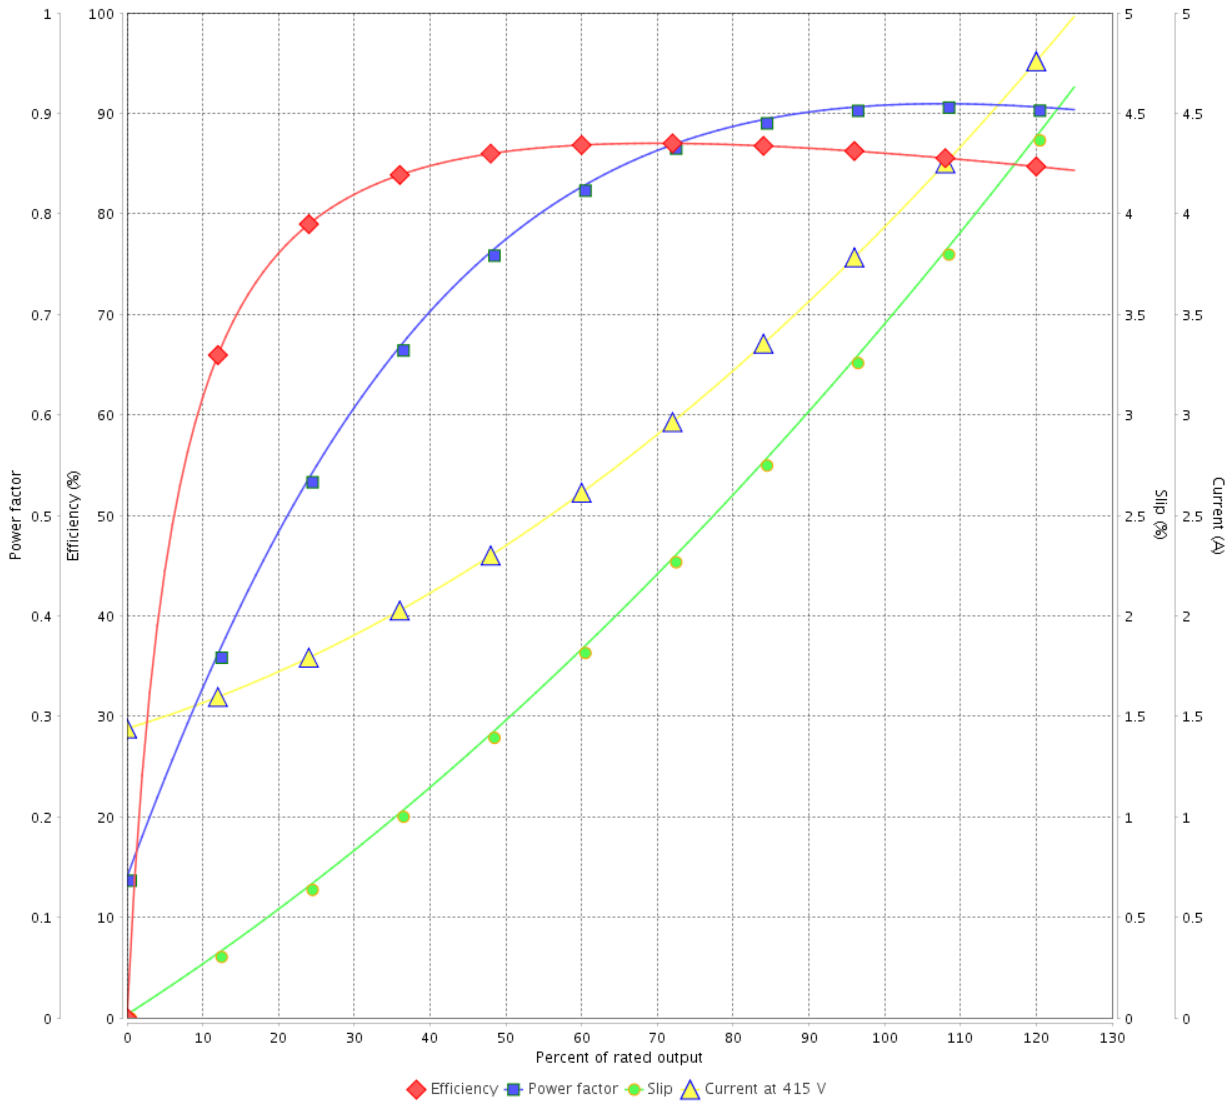


Performance : 415 V 50 Hz 2P

Rated current	: 3.91 A	Moment of inertia (J)	: 0.0070 kgm ²
LRC	: 8.9	Duty cycle	: Cont.(S1)
Rated torque	: 0.752 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.15
Breakdown torque	: 340 %	Temperature rise	: 80 K
Rated speed	: 2895 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	13/05/2022			

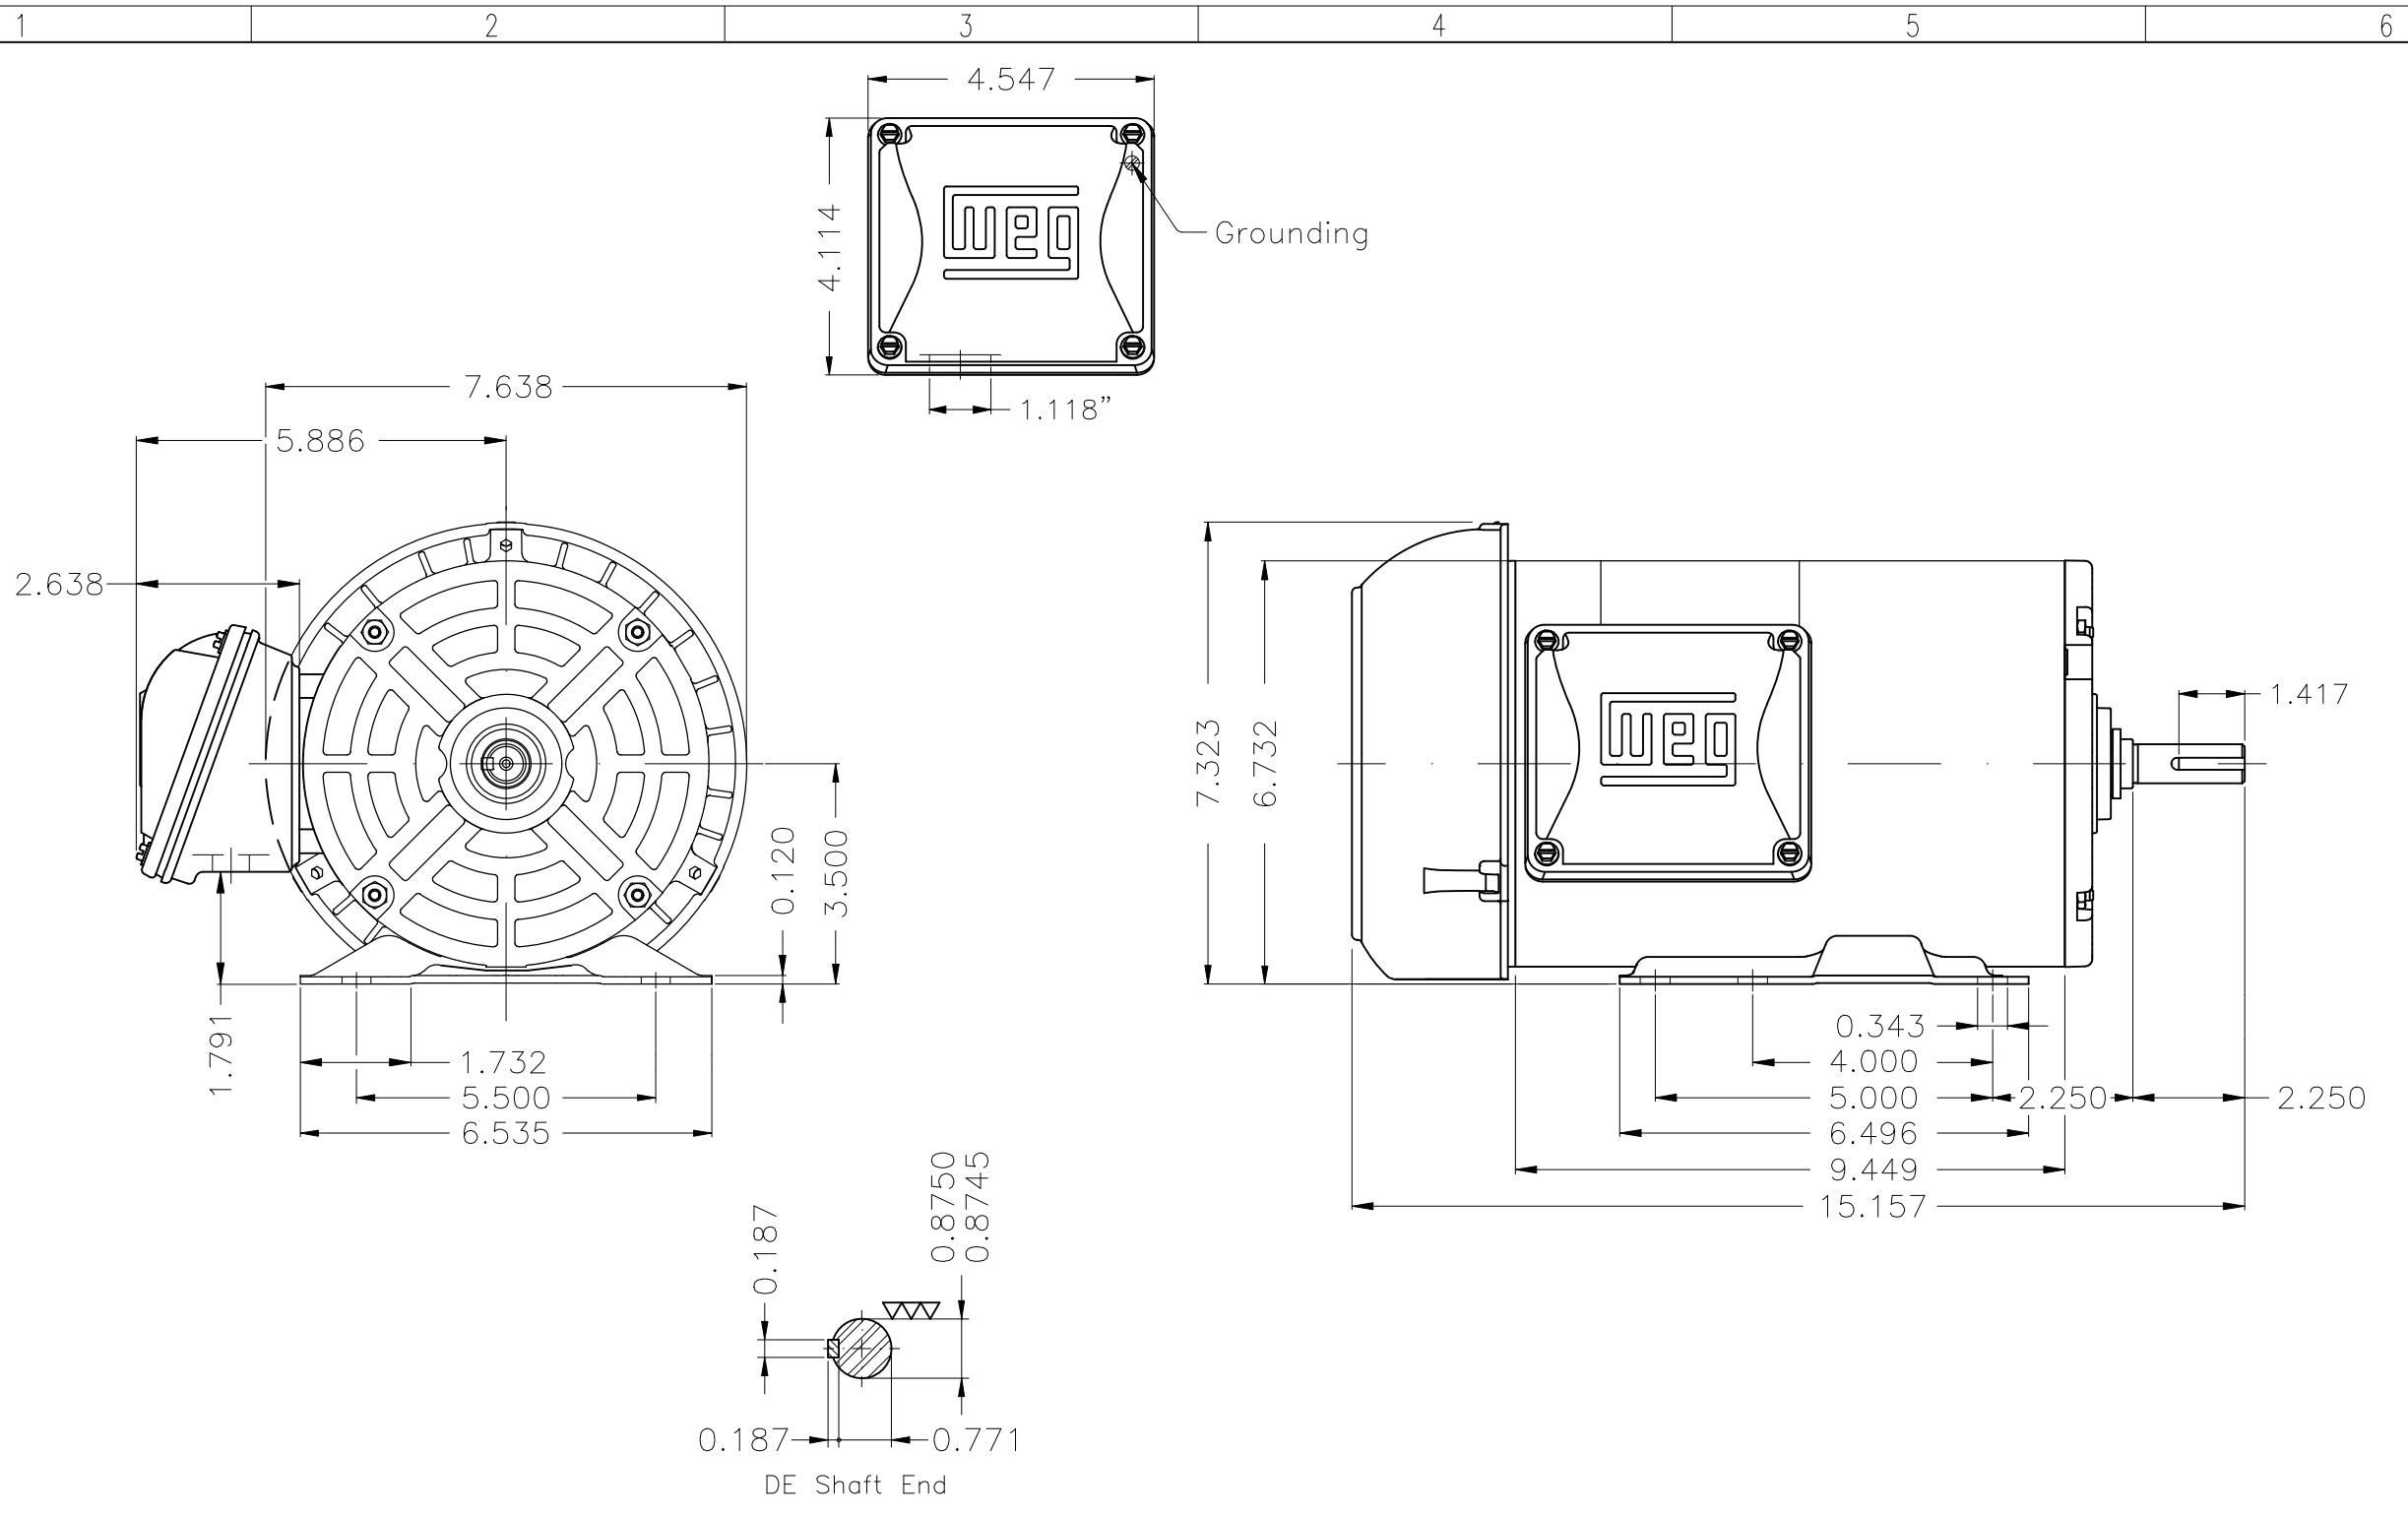

Color Munsell N 1 matte black						
Painting plan 207N						
Mounting F-1/B3R(D)						
					HYBRISUSER	00
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED
EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF.			PREVIEW	
CHECKED		FRAME 143/5T IP55 TEFC			WDD	00
RELEASED						
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1

3 HP 02 Poles 60 Hz

A