DATA SHEET



Three Phase Induction Motor - Squirrel Cage Customer Product line : W22 NEMA Premium Efficiency Product code: 11783911 Three-Phase : 182/4T Locked rotor time Frame : 30s (cold) 17s (hot) Output : 7.5 HP (5.5 kW) Temperature rise : 80 K Poles Duty cycle : Cont.(S1) Frequency : 60 Hz Ambient temperature : -20°C to +40°C : 1000 m.a.s.l. Rated voltage : 575 V Altitude Rated current : 7.01 A Protection degree : IP55 : IC411 - TEFC L. R. Amperes : 57.5 A Cooling method LRC : 8.2x(Code J) Mounting : F-1 : Both (CW and CCW) No load current : 2.32 A Rotation¹ Rated speed : 3485 rpm Noise level² : 66.0 dB(A) Slip : 3.19 % Starting method : Direct On Line Rated torque : 1.56 kgfm Approx. weight³ : 44.1 kg Locked rotor torque : 270 % Breakdown torque : 330 % : F Insulation class Service factor : 1.25 Moment of inertia (J) : 0.0095 kgm² Design 50% 75% 100% Output Foundation loads Efficiency (%) 88.5 89.5 89.5 Max. traction : 86 kgf Max. compression : 130 kgf Power Factor 0.75 0.84 0.88 Losses at normative operating points (speed;torque), in percentage of rated output power P2 (0,5;1,0) P3 (0,25;1,0) P4 (0,9;0,5) P5 (0,5;0,5) P6 (0,5;0,25) P1 (0,9;1,0) P7 (0,25;0,25) 11.4 9.4 8.7 5.3 3.4 1.3 Drive end Non drive end Bearing type 6206 ZZ 6207 ZZ Sealing V'Ring V'Ring Lubrication interval Lubricant amount Lubricant type Mobil Polyrex EM Notes This revision replaces and cancel the previous one, which These are average values based on tests with sinusoidal must be eliminated. power supply, subject to the tolerances stipulated in NEMA (1) Looking the motor from the shaft end. MG-1. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.

Rev.		Changes Summary	Checked	Date			
Performed by							
Checked by				Page	Revision		
Date	20/10/2024			1/2			
This document is exclusive property of WEG S/A. Pentinting is not allowed without written authorization of WEG S/A							

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Checked by


Date

20/10/2024

Product line : W22 NEMA Premium Efficiency

Three-Phase

Product code: 11783911

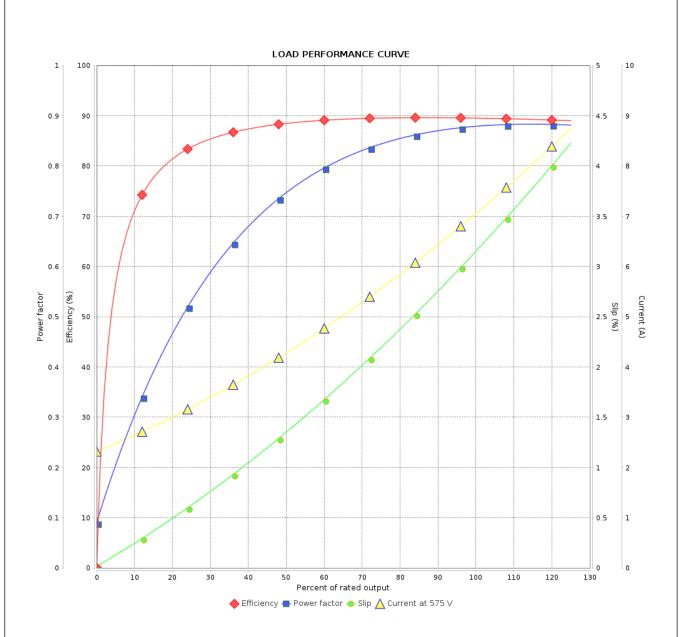

	-1					
Performance		: 575 V 60 Hz 2P				
Rated current LRC Rated torque Locked rotor torque Breakdown torque Rated speed	•	: 7.01 A : 8.2 : 1.56 kgfm : 270 % : 330 % : 3485 rpm	Duty cy Insulati Service	on class factor rature rise	: 0.0095 kgm² : Cont.(S1) : F : 1.25 : 80 K : A	
Rev.	Changes Summary			Performed	Checked	Date
Performed by						

Page

2/2

Revision

