

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14679747

Frame	: 324/6TC	Locked rotor time	: 36s (cold) 20s (hot)
Output	: 40 HP (30 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 37.7 A	Protection degree	: IP55
L. R. Amperes	: 230 A	Cooling method	: IC411 - TEFC
LRC	: 6.1x(Code G)	Mounting	: F-1
No load current	: 13.8 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1775 rpm	Noise level ²	: 66.0 dB(A)
Slip	: 1.39 %	Starting method	: Direct On Line
Rated torque	: 16.4 kgfm	Approx. weight ³	: 308 kg
Locked rotor torque	: 229 %		
Breakdown torque	: 240 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.3861 kgm ²		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	93.6	94.1	94.1	Max. traction	: 340 kgf
Power Factor	0.00	0.72	0.80	0.85	Max. compression	: 648 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
6.2	5.4	4.9	2.8	2.0	1.3	0.9

	Drive end	Non drive end
Bearing type	: 6312 C3	6212 C3
Sealing	: V'Ring	Lip Seal
Lubrication interval	: 20000 h	20000 h
Lubricant amount	: 21 g	13 g
Lubricant type	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 3 Revision		
Checked by				
Date	14/07/2025			

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Brake information

Voltage: 525-575 V
Brake Torque: 40.8 kgfm

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 3		Revision
Checked by					
Date	14/07/2025				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :




Product line : W22 Brake Motor NEMA Premium Product code : 14679747
Efficiency Three-Phase

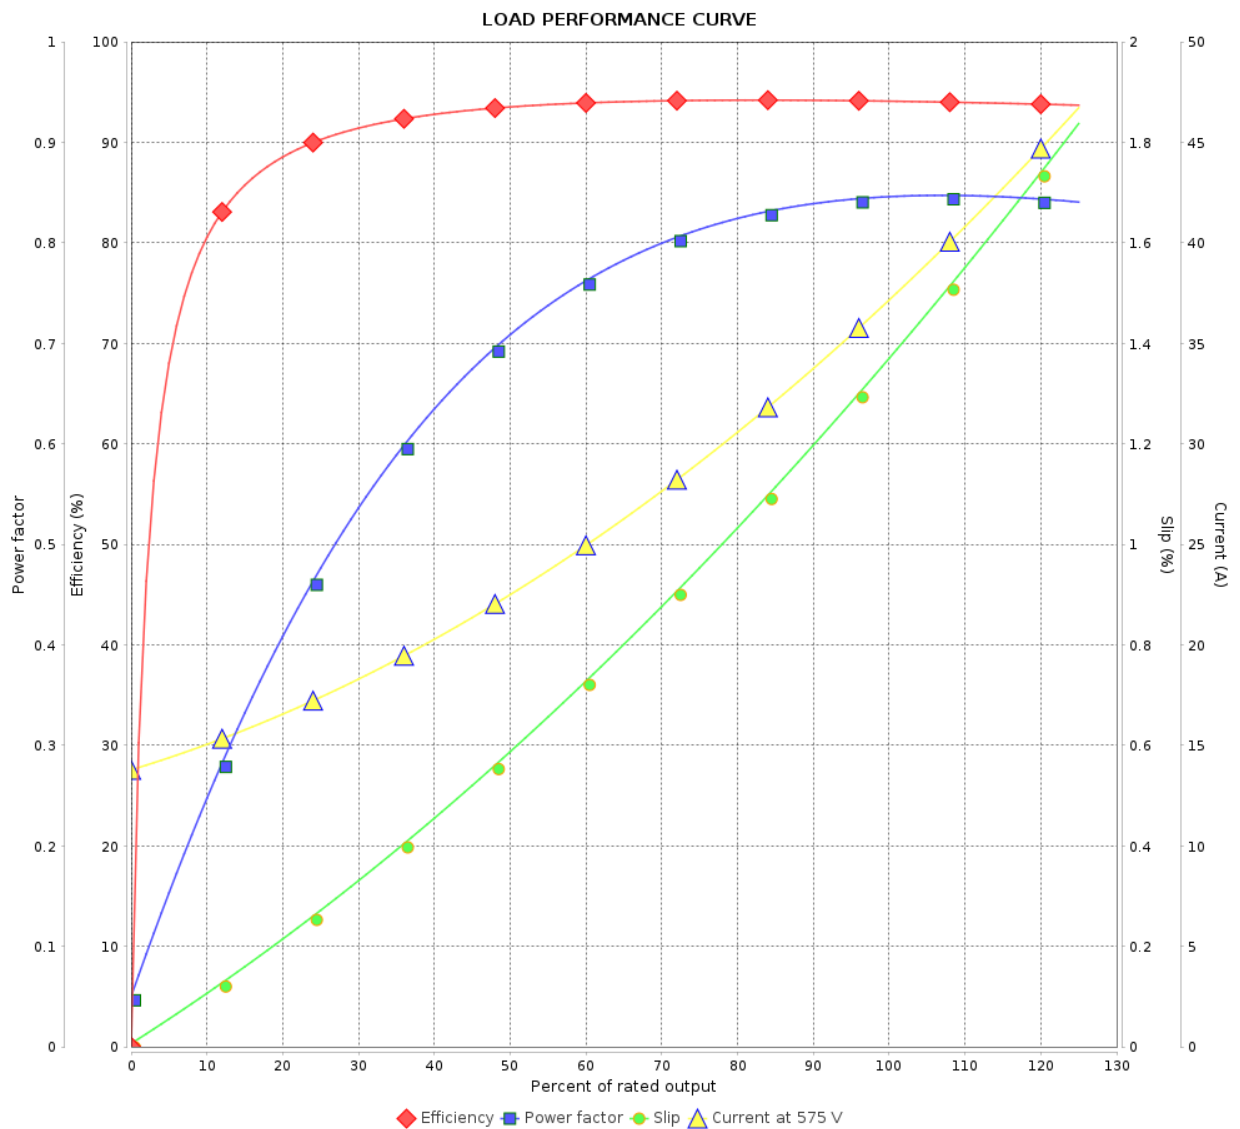

Performance : 575 V 60 Hz 4P

Rated current	: 37.7 A	Moment of inertia (J)	: 0.3861 kgm ²
LRC	: 6.1	Duty cycle	: Cont.(S1)
Rated torque	: 16.4 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.25
Breakdown torque	: 240 %	Temperature rise	: 80 K
Rated speed	: 1775 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 3 Revision		
Checked by				
Date	14/07/2025			

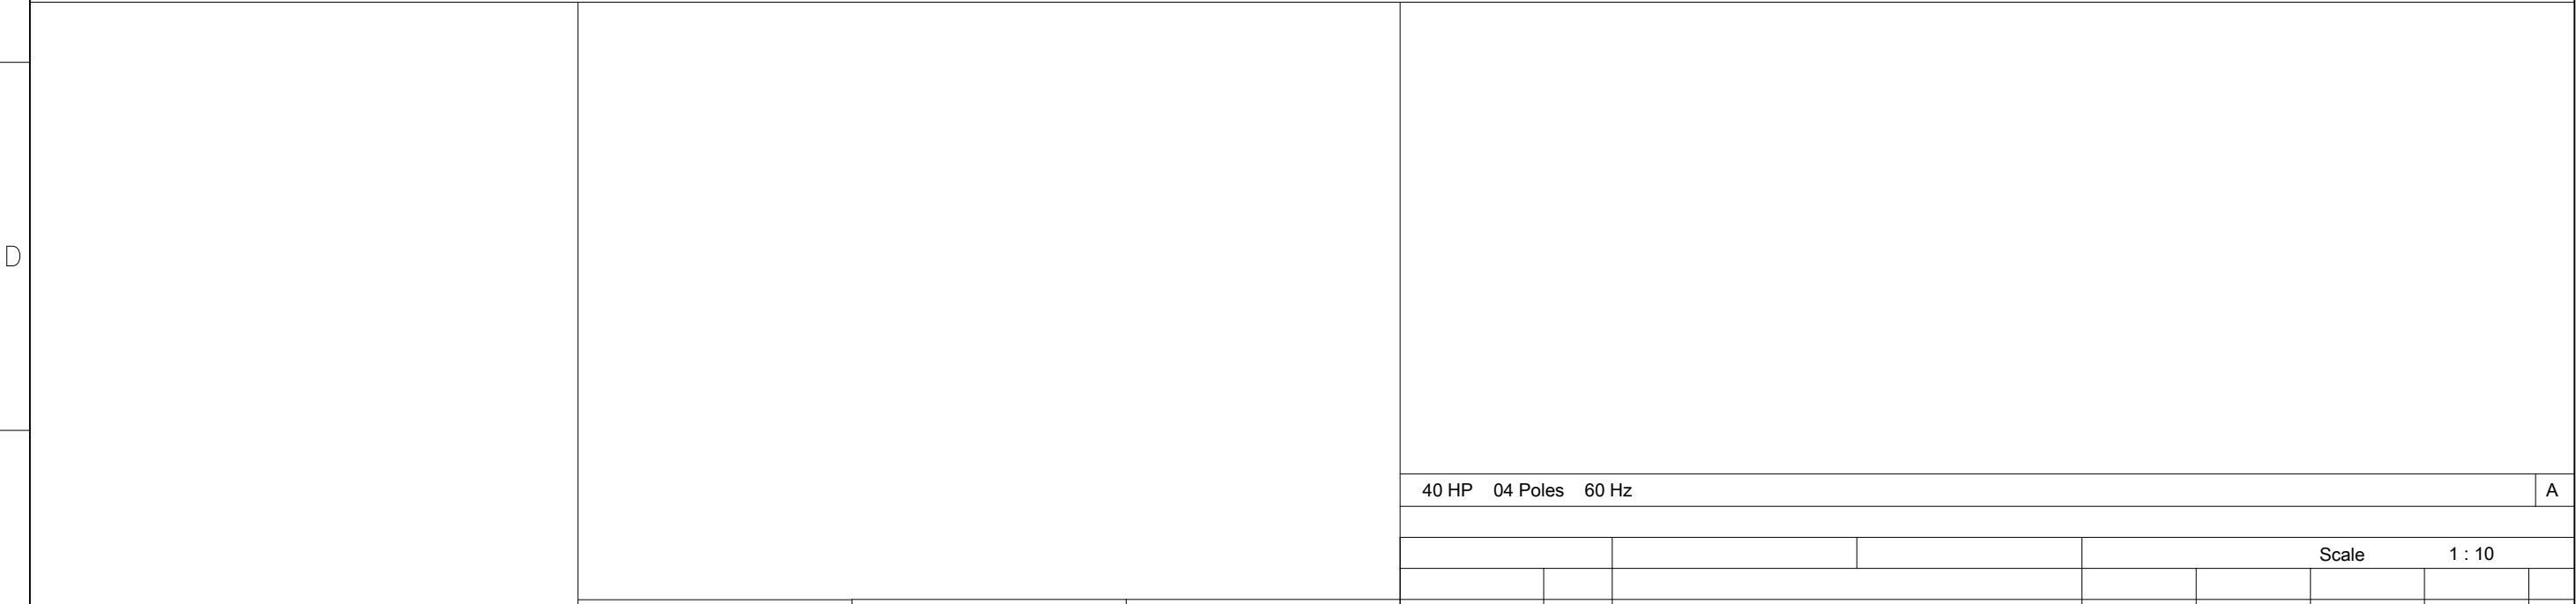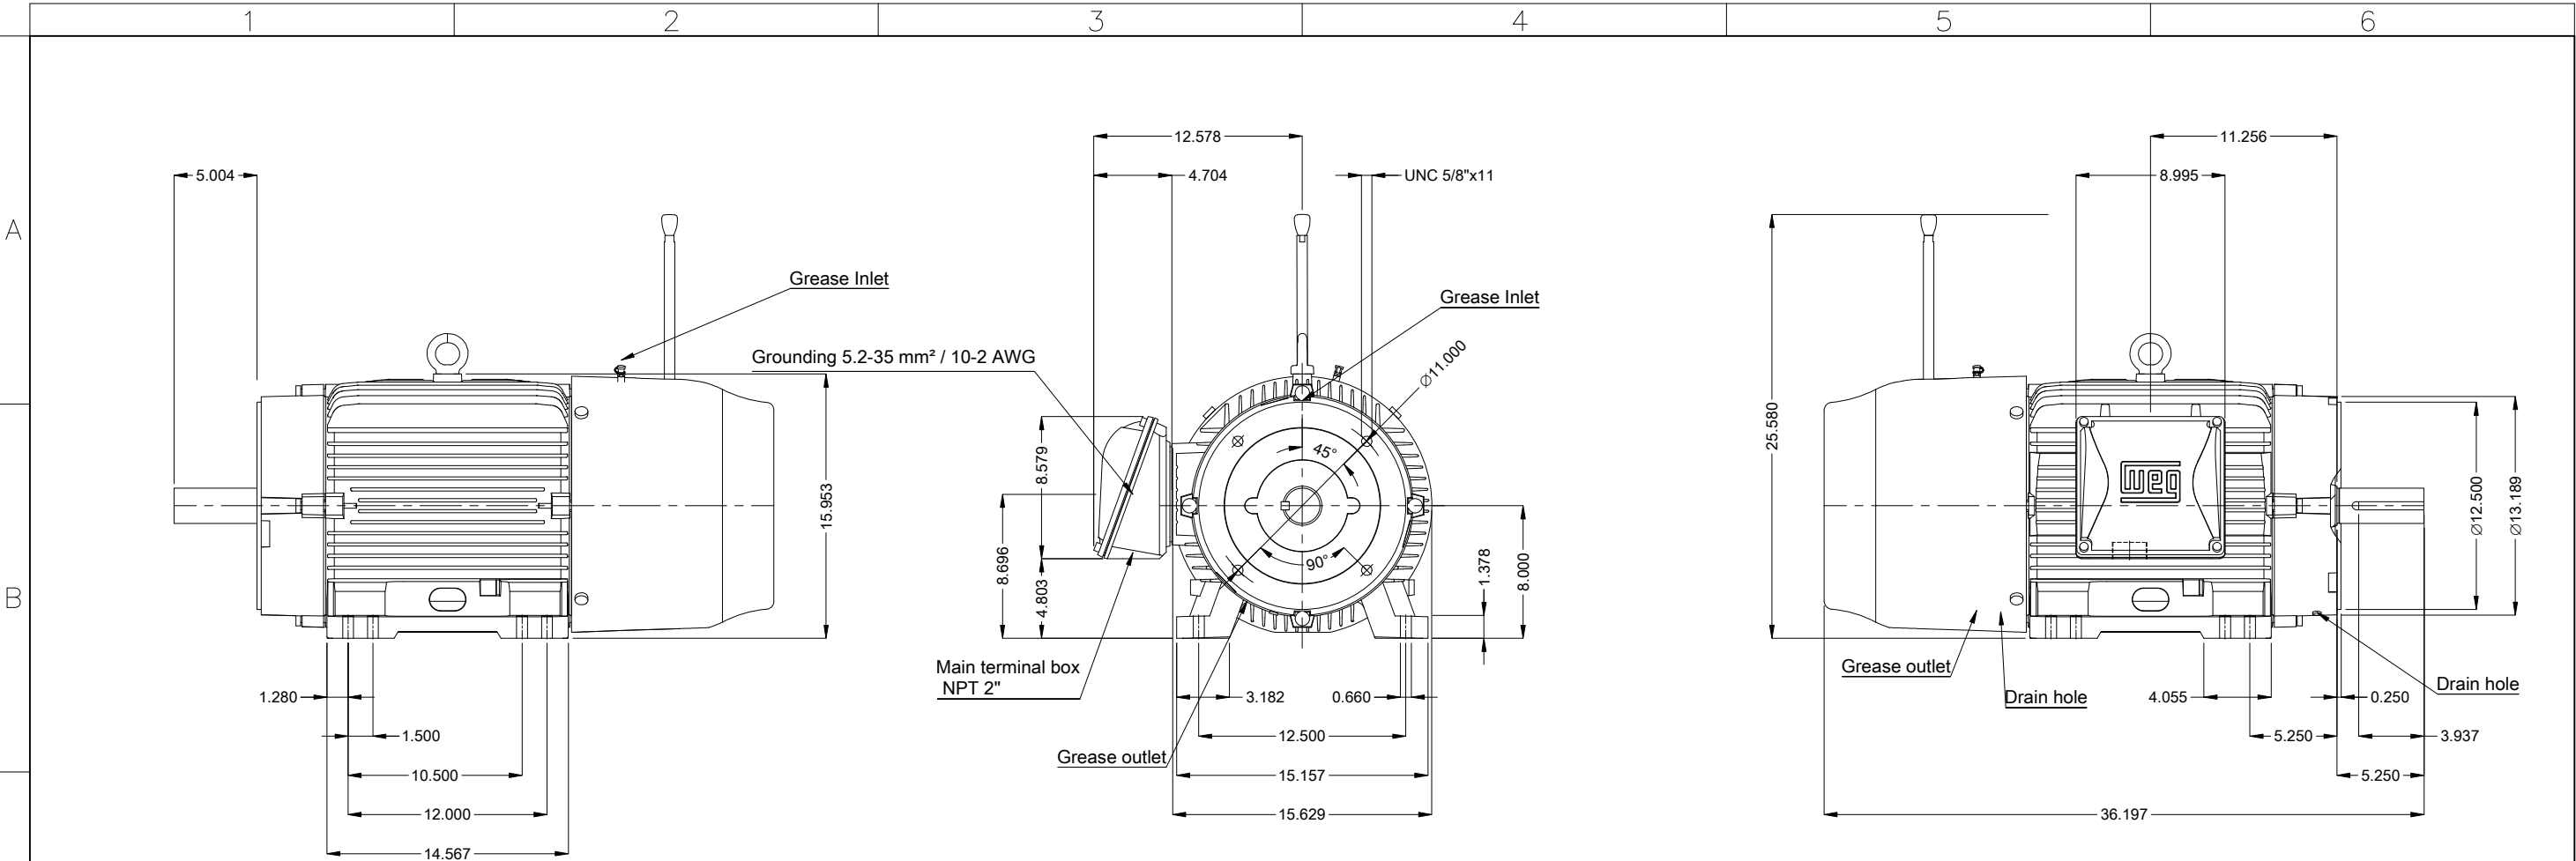

E	Brake voltage 525-575 V	<div>DE Shaft End</div> 			40 HP 04 Poles 60 Hz										A
	Break size 25 (400 Nm)														
	Color RAL 5009														
	Painting plan 203A														
	Mounting NEMA F-1														
	Mounting B34D														
					Scale 1 : 10										
</															